[INCH−POUND]
A−A−59950B
6 November 2024
SUPERSEDING
A−A−59950A
10 October 2019


COMMERCIAL ITEM DESCRIPTION

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 7 BODY, FOR COLD PLATE APPLICATIONS, GENERAL REQUIREMENTS FOR

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for a family of 7 piece wedge card holders for holding circuit card assemblies (CCA) into their installed positions when used in heat sinking devices (cold plates, heat exchanger) or other applications. Card holders covered by this CID are intended to provide maximum contact between thermal paths on the circuit card assemblies to the heat sink surfaces, and to provide increased resistance to loosening due to shock and vibration. Requirements for specific card holders are covered in the individual CID specification sheets. Card holders covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

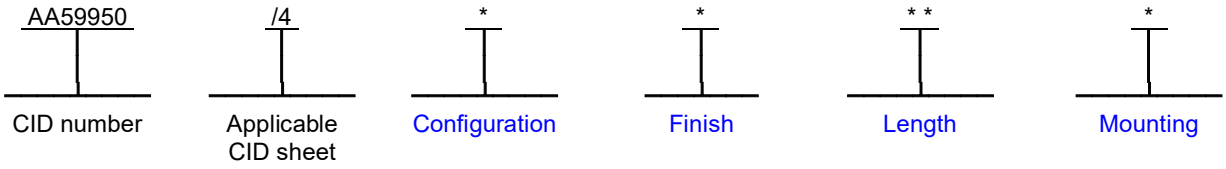

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Card holders supplied to this CID shall be as specified on the applicable CID specification sheet.

3.2 CID specification sheet. The family of card holders for use on circuit card assemblies shall be in accordance with the requirements specified herein and the applicable CID specification sheet. In the event of conflict between this general CID and the applicable CID specification sheet, the latter shall govern.

3.3 Material. Materials shall be as specified herein and on the applicable CID specification sheet.

3.3.1 Body and wedges. The body and wedge material shall be aluminum alloy 6061 or 6063 of temper T6 in accordance with ASTM B221, SAE AMS−QQ−A−200/8, or equivalent.

3.3.2 Mounting shaft (when used). The mounting shaft material shall be aluminum alloy 6061, 6063, or 7075 of temper T6 in accordance with ASTM B221, SAE AMS−QQ−A−200/8, or equivalent.

3.3.3 Rear wedge thread reinforcement (when applicable). The rear wedge thread reinforcement (captive nut or helical insert) material shall stainless steel in accordance with ASTM A582/A582M or equivalent.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218, or electronic mail at 5998.Documents@dla.mil. Since contact information can change, you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5998

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

3.3.4 Cup. The cup material for visual indicators shall stainless steel in accordance with ASTM A240/A240M, ASTM A582/A582M, or equivalent.

3.3.5 Flat washer. The flat washer shall comply with AIA/NAS NAS 620 or equivalent.

3.3.6 Lockwasher. The lockwasher shall comply with AIA/NAS NASM35338, AIA/NAS NAS 1676, or equivalent.

3.3.7 Screw. The screw material shall be stainless steel in accordance with SAE AMS−QQ−S−763, ASTM A484/A484M, ASTM A582/A582M, or equivalent.

3.3.8 Screw retention lock nut (when applicable). When screw retention is specified, the lock nut used shall comply with AIA/NAS NASM21043 or equivalent.

3.3.9 Spring, . The spring material for visual indicators shall be stainless steel in accordance with ASTM A313/A313M, ASTM A580/A580M, or equivalent.

3.3.10 Alignment springs. The alignment spring (when needed) shall be either beryllium copper in accordance with ASTM B194, or stainless steel in accordance with SAE AMS 5904, or equivalent.

3.4 Configurations. Card holders are available with many options that determine its configurations. The individual options of a particular card holder are specified on the applicable CID specification sheet. Listed below is a compilation of the most popular options.

3.4.1 Lockwasher and flat washer. A lockwasher and flat washer located under the screw head will provide for additional resistance to loosening from shock and vibration. Unless otherwise inherent to the design of the card holder, on those where a lockwasher and flat washer are an option, a configuration identifier shall be included in the PIN.

3.4.2 Screw self–locking element. The use of a screw self-locking element on the male threads of the screw will provide prevailing torque for increased resistance to loosening of the card holder assembly from shock and vibration. The self-locking element shall comply with AIA/NAS NAS1283, MIL−DTL−18240, or equivalent. Card holders requiring a screw self-locking element shall include a configuration identifier in the PIN.

3.4.3 Facing (left or right). Some card holders require a facing suffix to denote their unique orientation when properly installed on a circuit card assembly. These card holders are available for mounting in either the left hand or right hand position. Unless otherwise specified, left facing card holders shall include a configuration identifier "L" in the PIN. Unless otherwise specified, right facing card holders shall include a configuration identifier "R" in the PIN.

3.5 Finish.

3.5.1 Stainless steel parts (when applicable). Stainless steel parts shall be subjected to passivation treatment in accordance with SAE AMS 2700, MIL−DTL−5002, or equivalent.

3.5.2 Beryllium copper parts (when applicable). Beryllium copper parts shall be finished in accordance with SAE AMS−QQ−N−290, Class 1, Grade G, Bright or equivalent.

3.5.3 Aluminum parts. Unless otherwise specified, all aluminum parts shall be finished as specified in 3.5.3.1.1 through 3.5.3.3.2, inclusive. Finish designators shall be as specified in table I and on the applicable CID specification sheet or equivalent. A finish designator shall be included in the PIN.

3.5.3.1 Anodize. Anodized coatings are intended to provide surface corrosion resistance and have good dielectric properties. Two types of anodized finishes are available for card holder wedge bodies fabricated of aluminum, thin anodize and thick (or hard) anodize. A thin anodized coating applied to aluminum wedge bodies provides good surface corrosion protection and medium abrasion resistance. A hard anodized coating applied to the aluminum wedge bodies provides excellent surface corrosion and abrasion resistance under severe service conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

3.5.3.1.1 Black anodized. Black anodize finish shall be in accordance with MIL−PRF−8625, type II, class 2 or equivalent. Black anodized finish assemblies shall include a finish designator "B" in the PIN.

3.5.3.1.2 Red anodized. Red anodize finish shall be in accordance with MIL−PRF−8625, type II, class 2 or equivalent. Black anodized finish assemblies shall include a finish designator "W" in the PIN.

3.5.3.1.3 Black anodized with dry film lubricant. Dry film lubricant applied over black anodize is for the reduction of wear and friction. Black anodize finish shall be in accordance with MIL−PRF−8625, type I or type II, class 2 or equivalent. Dry film lubricant shall be in accordance with MIL−PRF−46010, type I or equivalent. Black anodized with dry film lubricant finish assemblies shall include a finish designator "Q" in the PIN.

3.5.3.1.4 Hard black anodized. Hard black anodized finish provides excellent surface corrosion and abrasion resistance under severe service conditions. Hard black anodize finish shall be in accordance with MIL−PRF−8625, type III, class 2 or equivalent. Hard black anodized finish assemblies shall include a finish designator "H" in the PIN.

3.5.3.1.5 Hard black anodized with dry film lubricant. Dry film lubricant applied over hard black anodize is for the reduction of wear and friction. Hard black anodize finish shall be in accordance with MIL−PRF−8625, type III, class 2 or equivalent. Dry film lubricant shall be in accordance with MIL−PRF−46010 or equivalent. Hard black anodized with dry film lubricant finish assemblies shall include a finish designator "D" in the PIN.

3.5.3.2 Chemical conversion coatings (chemical film). Chemical conversion coatings on aluminum and aluminum alloys, also known as chemical film finishes, in accordance with MIL−DTL−5541 are primarily used for corrosion resistance where lower electrical resistance is required. Two types of chemical film finishes are available in this document for card holder parts that are fabricated of aluminum. A low electrical resistance chemical film finish, class 3, when applied to aluminum provides good surface corrosion protection and medium abrasion resistance. A thicker but less conductive chemical film finish, class 1A, when applied to aluminum card holder wedge bodies provides better surface corrosion and abrasion resistance under severe service conditions than class 3 chemical film finish.

3.5.3.2.1 Chemical film, gold (thick and not RoHS compliant). Gold chemical film finish shall be in accordance with MIL−DTL−5541, types I, class 1A or equivalent. Gold chemical film finish assemblies shall include a finish designator "C" in the PIN.

3.5.3.2.2 Chemical film, gold (low electrical resistance)(thin and not RoHS compliant). Gold chemical film finish shall be in accordance with MIL−DTL−5541, types I, class 3 or equivalent. Low electrical resistance gold chemical film finish assemblies shall include a finish designator "G" in the PIN.

3.5.3.2.3 Chemical film, clear (thick and RoHS compliant). Clear chemical film finish shall be in accordance with MIL−DTL−5541, type II, class 1A or equivalent. Clear chemical film finish assemblies shall include a finish designator "R" in the PIN.

3.5.3.2.4 Chemical film, clear (low electrical resistance)(thin and RoHS compliant). Clear chemical film finish shall be in accordance with MIL−DTL−5541, type II, class 3 or equivalent. Low electrical resistance clear chemical film finish assemblies shall include a finish designator "U" in the PIN.

3.5.3.3 Nickel. Two different nickel finishes are available for the aluminum parts of card holders, electroless and electrodeposited nickel. Electroless nickel finish provides a hard and smooth surface and protects aluminum and aluminum alloys from corrosion, oxidation and wear. Electrodeposited nickel finish protects metals against corrosive attack in rural, industrial, and marine atmospheres and offers high hardness for wear and low friction.

3.5.3.3.1 Nickel, electroless. Electroless nickel finish shall be in accordance with SAE AMS−C−26074, grade B, class 4 or equivalent. Electroless nickel finish assemblies shall include a finish designator "E" in the PIN.

3.5.3.3.2 Nickel, electrodeposited. Electrodeposited nickel finish shall be in accordance with SAE AMS−QQ−N−290, class 1, grade G, bright or equivalent. Electrodeposited nickel finish assemblies shall include a finish designator "P" in the PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

3.5.4 Stainless steel passivation. The passivation of stainless steel is not a plating or a coating. It is a cleaning process that removes residue from manufacturing operations and enhances the natural corrosion resistance of stainless steels.

TABLE I. Card holder finishes for aluminum parts and PIN designators.

Finish designator	Finish	Reference document (or equivalent)	Paragraph
B	Anodize, black	MIL-PRF-8625, type II, class 2	3.5.3.1.1
W	Anodize, red	MIL-PRF-8625, type II, class 2	3.5.3.1.2
Q	Anodize, black with dry film lubricant	MIL-PRF-8625, type I or II, class 2 and MIL-PRF-46010 (for dry film lubricant)	3.5.3.1.3
H	Anodize, hard black	MIL-PRF-8625, type III, class 2	3.5.3.1.4
D	Anodize, hard black with dry film lubricant	MIL-PRF-8625, type III, class 2 and MIL-PRF-46010 (for dry film lubricant)	3.5.3.1.5
	Chemical film, not RoHS compliant		
C	Maximum corrosion protection, gold	MIL-DTL-5541, type I, class 1A	3.5.3.2.1
G	Low electrical resistance, gold	MIL-DTL-5541, type I, class 3	3.5.3.2.2
	Chemical film, RoHS compliant		
R	Maximum corrosion protection, clear	MIL-DTL-5541, type II, class 1A	3.5.3.2.3
U	Low electrical resistance, clear	MIL-DTL-5541, type II, class 3	3.5.3.2.4
E	Nickel, electroless	SAE AMS-C-26074, grade B, class 4	3.5.3.3.1
P	Nickel, electrodeposited	SAE AMS-QQ-N-290, class 1, grade G, bright	3.5.3.3.2

3.6 Interface and physical dimensions. The card holders shall be as specified herein and the applicable CID specification sheet.

3.6.1 Expanded and relaxed dimensions. Expanded and relaxed dimensions shall be as specified in the applicable CID specification sheet.

3.6.2 Card holder length. Unless otherwise specified, the card holder length shall be the length of the body and wedge assembly in its relaxed state. The lengths available for a particular card holder shall be listed on the applicable CID specification sheet. Card holder length designator shall be included in the PIN. See table II for primary length designators for card holders 10 inches (254 mm) or greater in length. Examples of length designation (with the primary length designator is the 13th character and the secondary length designator is the 14th character of the PIN) are underlined below:

8.50 inch (215.9 mm) card holder = AA59950/01CC 85 T

10.40 inch (264.2 mm) card holder = AA59950/02LQ A4 M

16.20 inch (411.5 mm) card holder = AA59950/03ER G2 T

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

TABLE II. Primary length designators for card holders 10 inches (254 mm) or longer.

PIN designation	Primary length, inches	PIN designation	Primary length, inches
A	10 (254 mm)	E	14 (356 mm)
B	11 (279 mm)	F	15 (381 mm)
C	12 (305 mm)	G	16 (406 mm)
D	13 (330 mm)	H	17 (431 mm)

3.6.3 Mounting options. The mounting options shall be as specified in 3.6.3.1 through 3.6.3.5, inclusive. Mounting option designators shall be included in the PIN (see table III). When mounting holes are required, the number of holes and their location on the card holder mounting body shall be as specified on the applicable CID specification sheet.

TABLE III. Mounting hole options and PIN designators.

PIN designation	Hole description	Number of holes
N	No holes (for adhesive mounting)	0
R	Rivet mount holes; counterbore and countersunk through holes	2 or more
T	Tapped 0–80 UNF 2B holes	2 or more
S	Tapped 2–56 UNC 2B holes	2 or more
V	Tapped 4–40 UNC 2B holes	2 or more
U	Tapped, metric M2 x 0.4 holes	2 or more
M	Tapped, metric M2.5 x 0.45 holes	2 or more
Y	Tapped, metric M3 x 0.5 holes	2 or more
P	Index pins	2 or more

3.6.3.1 No mounting holes. The no mounting holes option is intended to be used when card holders are to be mounted with adhesives. Card holders not having mounting holes shall include a mounting designator "N" in the PIN (see table III).

3.6.3.2 Rivet mounting holes (counterbore and countersunk through holes). The holes used for rivet mounting shall be of the diameter, countersunk angle, depth, and counterbore diameter (when applicable) specified on the applicable CID specification sheet. Card holders using rivet mount holes shall include a mounting designator "R" in the PIN (see table III).

3.6.3.3 Tapped holes. Tapped holes shall be 0–80 UNF, 2–56 UNC, or 4–40 UNC through holes. Card holders using tapped holes shall include a mounting designator "T", "S", or "V", respectively in the PIN (see table III).

3.6.3.4 Tapped holes, metric. Metric tapped holes shall be 2.0 mm x 0.4 mm (.08 x .016 inches), 2.5 mm x 0.45 mm (.098 x .018 inches), or 3.0 mm x 0.5 mm (.12 x .019 inches) through holes. Card holders using metric tapped holes shall include a mounting designator "U", "M", or "Y", respectively in the PIN (see table III).

3.6.3.5 Index pins. Index pins details shall be specified on the applicable CID specification sheet. Card holders using index pins shall include a mounting designator "P" in the PIN (see table III).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

3.6.4 Actuating screw. Unless otherwise specified on the applicable CID specification sheet, the screw shall have a internal hex socket head for tool engagement and shall turn clockwise to secure the card holder and the attached circuit card assembly into its installed position.

3.6.5 Disassembly. Unless otherwise specified by the CID specification sheet, card holders shall have the capability of being disassembled before or after mounting to the circuit card assembly.

3.6.6 Fasteners for mounting card holder to circuit card assembly (CCA) (see figures 1 and 2). This specification covers two different card holder to CCA mounting designs when using fasteners. These two different card holder to CCA mounting designs are shown on figure 1 as follows: Wedge body mount and shaft mount.

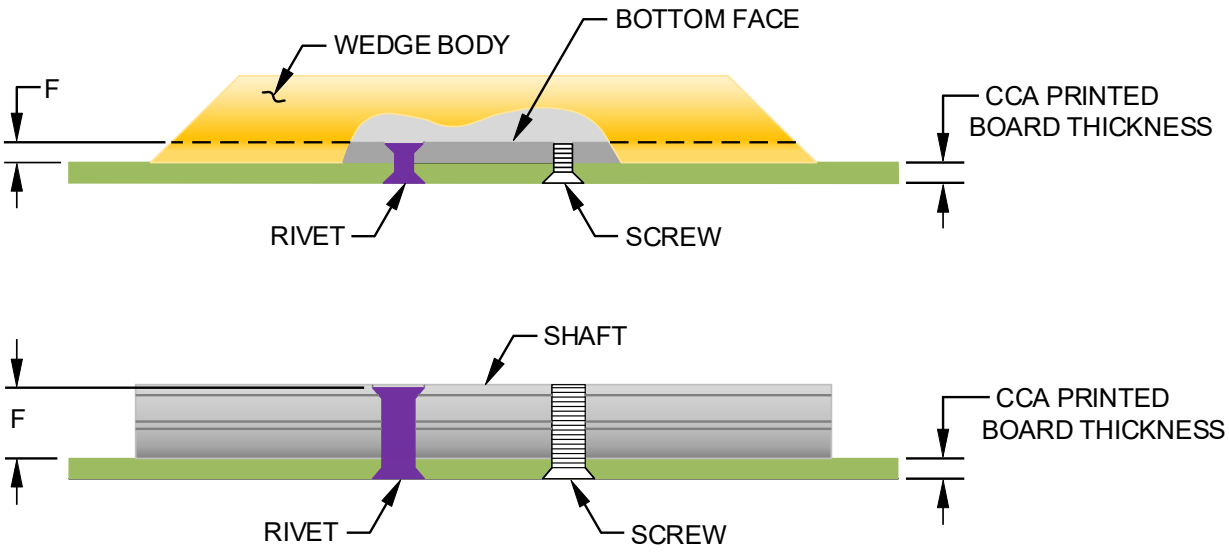


FIGURE 1. Wedge body and shaft mounting fastener details.

3.6.6.1 Threaded fasteners (see figure 1). The screw length and head style of threaded fasteners will depend on details of the card holder application. The screw threads should not extend beyond the bottom face of the wedge body or top edge of the shaft in order to not interfere with the operation of the card holder. The length of the screw can be calculated as follows:

Screw length = CCA printed board thickness plus dimension "F".

Dimension "F" shall be as specified on the CID specification sheet.

3.6.6.2 Rivet fasteners (see figures 2 and 3). The rivet length and head style depend on details of the card holder application. The rivet should not extend beyond the bottom face of the wedge body or top edge of the shaft. The work thickness needed to determine the length of the rivet is calculated as follows:

Work thickness = CCA printed board thickness plus dimension "F".

Dimension "F" shall be as specified on the CID specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.


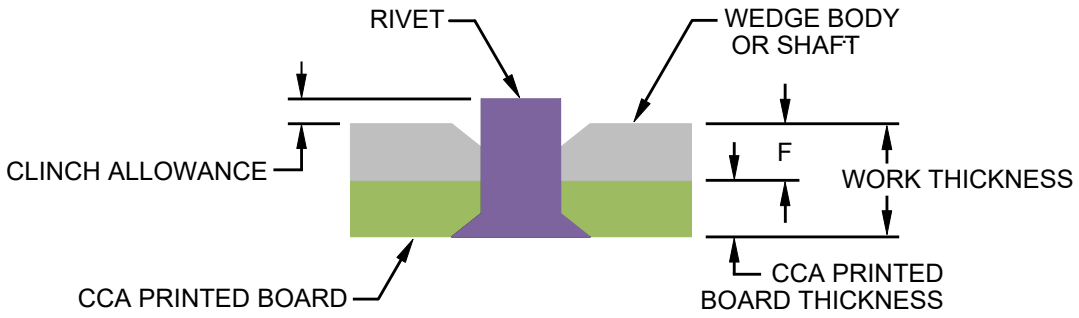


FIGURE 2. Shaft and wedge mounting body fastener details.

3.6.6.3 Rivet dimensions. The rivet length and head styles depend on details of the card holder mounting design and application. The rivet styles (A or B) typically used when rivet mounting is specified are depicted on figure 3.

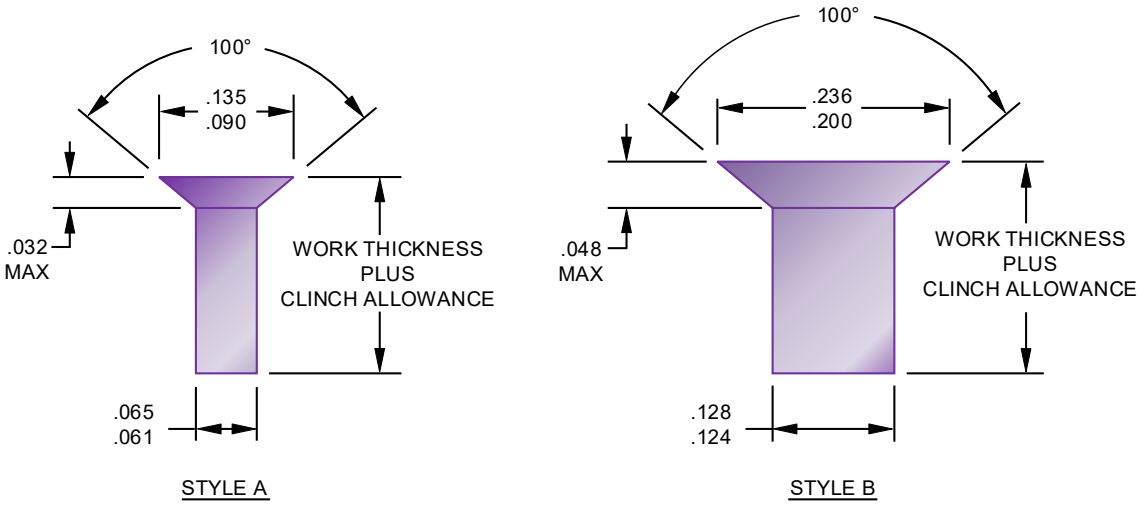

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.032	0.81	.061	1.55	.090	2.29	.128	3.25	.200	5.08
.048	1.21	.065	1.65	.124	3.15	.135	3.43	.236	5.99

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 3. Suggested rivet dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

3.6.7 Cold plate slot width dimension (see figure 4). The recommended cold plate slot width dimension equals the thickness of the CCA printed board thickness plus a cold plate spacing dimension as specified on the applicable CID specification sheet.

3.6.8 Nominal installation torque. When card holders are used in cold plate applications as depicted on figure 4, the nominal installation torque of each card holder shall be as specified on the CID specification sheet.

3.7 Marking. Card holders supplied to this CID can be marked with the manufacturer's standard commercial PIN when applicable. The PIN marked on the unit pack shall be the CID PIN.

3.8 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.9 Workmanship. Card holders shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

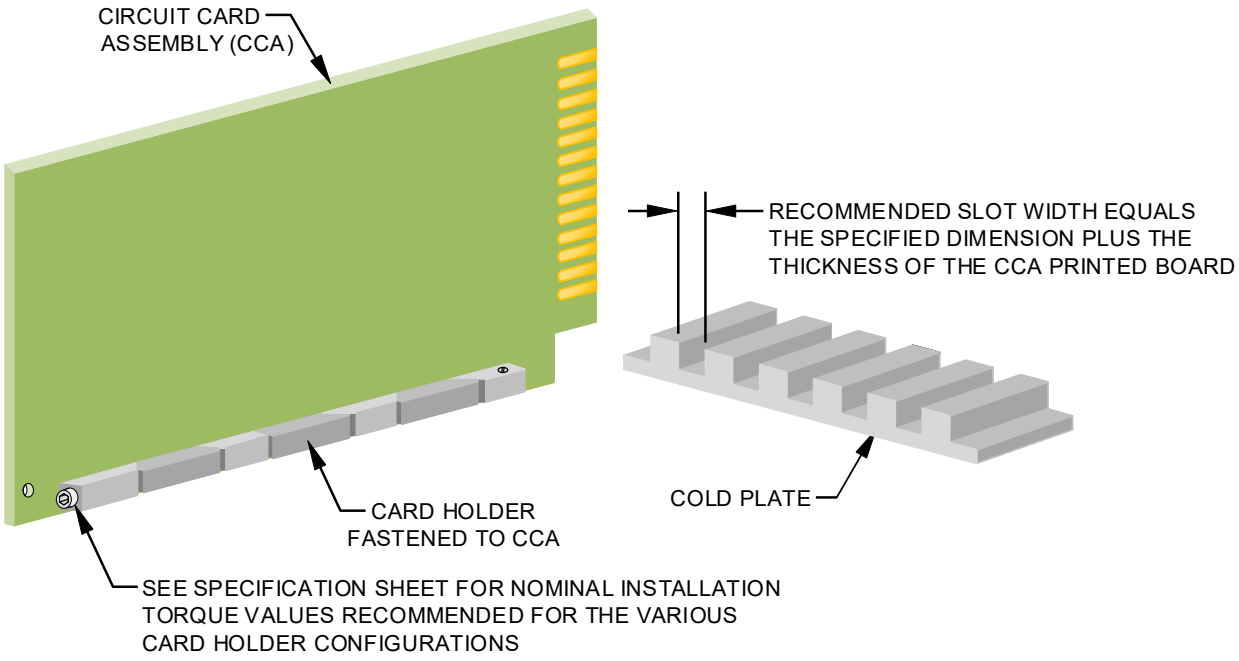


FIGURE 4. Cold plate slot width details.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, quality assurances practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

5.2 Certification. Certification may be done as an option to testing by using the government's trusted suppliers and with the procuring activity approval. The contractor shall certify that the product offered meets the requirements of this document, the applicable CID specification sheet, is manufactured to industry standards and quality assurance practices, and is the same as the product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these card holders to DLA Land and Maritime under the Parts Management Advisory Team (PMAT) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL−DTL−5002	–	Surface Treatments and Inorganic Coatings for Metal Surfaces of Weapon Systems.
MIL−DTL−5541	–	Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
MIL−PRF−8625	–	Anodic Coatings For Aluminum and Aluminum Alloys.
MIL−DTL−18240	–	Fastener Element, Self-Locking, Threaded Fastener, 250°F Maximum.
MIL−PRF−46010	–	Lubricant, Solid Film, Heat Cured, Corrosion Inhibiting.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

FEDERAL REGULATIONS

FAR	–	Federal Acquisition Regulations (FAR).

(Copies of these documents are available online at https://www.acquisition.gov/browse/index/far.)

Other Publications

AEROSPACE INDUSTRIES ASSOCIATION (AIA)

AIA/NAS NAS 620	–	Washer, Flat, Reduced Outside Diameter.
AIA/NAS NAS 1283	–	Fasteners, Male Threaded, Self-locking.
AIA/NAS NAS 1676	–	Washer, Lock-Spring, Helical, Hi-Collar.
AIA/NAS NASM35338	–	Washer, Lock-Spring, Helical, Regular (Medium) Series.
AIA/NAS NASM21043	–	Nut, Self-Locking, 800°F, Reduced Hexagon, Reduced Height, Ring Base, CRES.

(Copies of these documents are available online at https://www.aia-aerospace.org.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

ASTM INTERNATIONAL (ASTM)

ASTM A240/A240M	−	Standard Specification for Chromium and Chromium−Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
ASTM A313/A313M	−	Standard Specification for Stainless Steel Spring Wire.
ASTM A484/A484M	−	Standard Specification for General Requirements for Stainless Steel Bars, Billets, Shapes, and Forgings.
ASTM A580/A580M	−	Standard Specification for Stainless Steel Wire.
ASTM A582/A582M	−	Standard Specification for Free–Machining Stainless Steel Bars.
ASTM B194	−	Standard Specification for Copper-Beryllium Alloy Plate, Sheet, Strip, and Rolled Bar.
ASTM B221	−	Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes.

(Copies of these documents are available online at https://www.astm.org.)

SAE INTERNATIONAL (SAE)

SAE AMS−QQ−A−200/8	–	Aluminum Alloy 6061, Bar, Rod, Shapes, Tube, and Wire, Extruded.
SAE AMS−QQ−N−290	–	Nickel Plating (Electrodeposited).
SAE AMS−QQ−S−763	–	Steel, Corrosion Resistant, Bars, Wire, Shapes, and Forgings.
SAE AMS−C−26074	–	Electroless Nickel Coatings.
SAE AMS 2700	–	Passivation of Corrosion Resistant Steels.
SAE AMS 5904	–	Steel, Corrosion-Resistant, Sheet and Strip 18Cr - 9.0Ni (302) Cold Rolled, 1/2 Hard, 150 ksi (1034 MPa) Tensile Strength.

(Copies of these documents are available online at https://www.sae.org.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.5 Government users. To acquire information on obtaining these card holders from the Government inventory system, contact DLA Land and Maritime, ATTN: DLA Land and Maritime Call Center (NAB), P.O. Box 3990, Columbus, OH 43218−3990, DSN 661–7766 or 1−877−DLA−CALL (1−877−352−2255).

7.6 Assistance. Questions or comments pertaining to this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218–3990 or electronic mail address 5998.Documents@dla.mil. This document is available for downloading at World Wide Web URL https://quicksearch.dla.mil or https://landandmaritimeapps.dla.mil.

7.7 Guidance on use of alternative parts with less hazardous or non–hazardous materials. This specification provides for a number of alternative metal protection finish materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.

7.8 Suggested sources of supply. Refer to the associated CID specifications sheets as specified herein.

7.9 Changes from previous issue. Margins of this CID are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force −85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity

DLA − CC

Project 5998−2024−015

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:31Z
Check the source to verify that this is the current version before use.