A-A-1305
May 16, 1984

COMMERCIAL ITEM DESCRIPTION

HAMMER, HAND, MACHINISTS', BALL PEEN


The General Services Administrative has authorized the use of this commercial item description in preference to Type II, Class 1, Style B of Federal Specification GGG-H-86.

Salient Characteristics:

Conform to ANSI B173.2 and requirements stated herein.

Finish. Polished striking face and peen/protective coating of the entire head to deter rusting.

Handle. Fiberglass or clear lacquered hickory as specified.

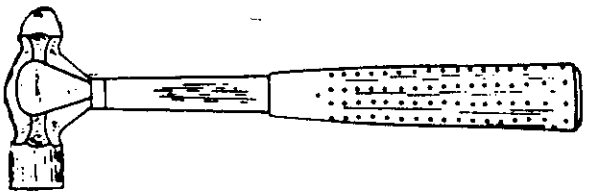

(Figure is illustrative and not restrictive)

Hammer, Hand, Machinists', Ball Peen

Nominal Head Weight	Handle Type	Handle Length Overall ±1	National Stock Number
Ounces		Inches	
16	Hickory	14-1/2	5120-01-114-5499
20	Hickory	15	5120-01-112-8343
24	Hickory	15	5120-01-112-8342
4	Fiberglass	10-1/2	5120-00-061-8540
8	Fiberglass	12	5120-00-061-8541
12	Fiberglass	13	5120-00-061-8542
16	Fiberglass	14-1/2	5120-00-061-8543
20	Fiberglass	15	5120-00-061-8544
24	Fiberglass	15	5120-00-061-8545
32	Fiberglass	16	5120-00-061-8546
48	Fiberglass	16	5120-00-900-6111

Marking. Hammers shall be legibly marked with the manufacturer's name or trademark. The country of origin shall be marked on each hammer.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Workmanship. All hammers shall be free from imperfections which may affect their safety, appearance, serviceability, or durability.

The issue of ANSI B173.2 in effect on date of the solicitation shall apply.

Test:

Handgrip Test. Hammers with handgrips shall be subjected to test. Each sample shall be conditioned climatically to 30 degrees F, plus or minus 2 degrees F, and remain at this temperature for 1 hour or until thermal stabilization has occurred. The sample shall then be cycled to plus 120 degrees F, plus or minus 2 degrees F, and remain at this temperature for 1 hour or until thermal stabilization has occurred. The sample shall then be conditioned to plus 70 degrees F, plus or minus 10 degrees F (room ambient temperature).

The samples shall then be subjected to a pull test force applied to the grip parallel to the longitudinal axis of the handle with the hammerhead securely captured to restrict movement. In order to minimize normal forces to the handle, the handgrip shall be captured using a woven wire cable grip or suitable device.

The pull test force is to be as noted below, except, that for certain sizes where the handgrip pull test force is found to be greater than the pull-apart force (tensile force). In this instance the handgrip shall be subjected to the head pull-apart force (tensile force) as a maximum in lieu of the specified force.

Grips which loosen or separate from the handle shall be cause for rejection.

After application of the pull test, the hammers shall be held by the head, and the grip twisted at the normal handgrip position by hand in alternating directions with a torque as noted in the table below. Five complete twisting cycles shall be performed, after which there shall be no grip looseness or separation from the handle.

HAMMERHEAD WEIGHT	PULL TEST FORCE	TORQUE TEST
Less than 16 oz.	500 lbs.	40 in-lbs.
16 oz. and over	700 lbs.	50 in-lbs.

Crack detection test. All samples shall be 100 percent inspected and shall be subjected to either a wet magnetic - particle inspection test as described in ASTM E-709-80 or an Ultrascope detection test described in ASTM E-114-75. All surfaces shall be examined. Any hammer exhibiting surface crack indications in any location, may have that indication removed by minor rework. The lot shall be rejected if upon Government acceptance testing any crack indications are found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Fiberglass Handle Overstrike Test. Hammers with fiberglass handles shall withstand twenty three full swinging overstrike blows by an average built man (160 to 180 pounds), commensurate with the end use and weight of the hammer. The blows shall be against that portion of the handle directly behind the head and on a substantially supported steel object having a minimum 3/8 inch full radius.

Fiberglass Bending Moment Test: Hammers with fiberglass handles shall be subjected to the test below in lieu of the static force test found in ANSI B173.2. Samples of the assembled striking tool shall not break, chip, or crack when subjected to the applicable load and distance listed below. The distance shall be measured from the top of the tool head. The striking tool head shall be locked securely in the test fixture with the striking face down and with the handle extended in the horizontal plane. The load shall be applied gradually and in a vertical direction.

BENDING MOMENT TEST LOADS FOR FIBERGLASS HANDLED HAMMERS

Head Weight (Ounces)	Distance (Inches)	Applied Load (Pounds Minimum)
4	10	70
8	10	100
12	10	150
16	10	200
20	10	250
24	10	300
32	10	400
48	10	400

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, labeling, and marking shall be as specified in the contract or order.

ANSI Standards are available from American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

MILITARY INTERESTS:

Custodian

Air Force - 99
Army - GL
Navy - SH

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.