MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SCHOTTKY TTL,
PARITY CHECKER, MONOLITHIC SILICON

This amendment forms a part of MIL-M-38510/349A, dated 1 October 1986, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2.3, Case outline, add:

"X C-2A (20 terminal, .350" x .350"), square chip carrier"

1.3, Thermal resistance: Delete "Case 2" and substitute "Cases 2 and X".

PAGE 3

TABLE I, I_{IL}, min limits column: Delete "-.03" and substitute "+.02".

PAGE 4

4.2a.(1): Add test condition F.

TABLE II, Group A test requirements, class B devices: Add subgroups "10, 11".

PAGE 6

Figure 1: Delete "Case 2" and substitute "Cases 2 and X".

PAGE 12

TABLE III, V_{CC} pin, test no. 23: Add "5/".

TABLE III: Delete "Case 2" and substitute "Cases 2 and X".

PAGE 13

TABLE III: Delete "Case 2" and substitute "Cases 2 and X".

PAGE 14

TABLE III: Delete "Case 2" and substitute "Cases 2 and X".

PAGE 15

TABLE III: Delete "Case 2" and substitute "Cases 2 and X".

TABLE III, footnote 2, circuit C, Add: "-.02/+.02".

* TABLE III: Add footnote 5 "5/ For device types possessing NPN input structure V_{CC} = 0.0 V".

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the coversheet to the specification.

Replacement page	Page replaced
9	Reprinted without change
9A	New page
10	Reprinted without change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:25Z
Check the source to verify that this is the current version before use.

PAGE 16

4.4.3b.(1): Add test condition "F".

PAGE 17

6.2g: Delete "carriers,".

* 6.6, TABLE IV, Delete and substitute

Device type	A	B	C	D
	Fairchild Semiconductor	Motorola Incorporated	Signetics	Texas Instruments
01	X	X	X	X

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH, TD
Air Force - 11, 19, 85, 99
DLA - ES


User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-1042)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:25Z
Check the source to verify that this is the current version before use.

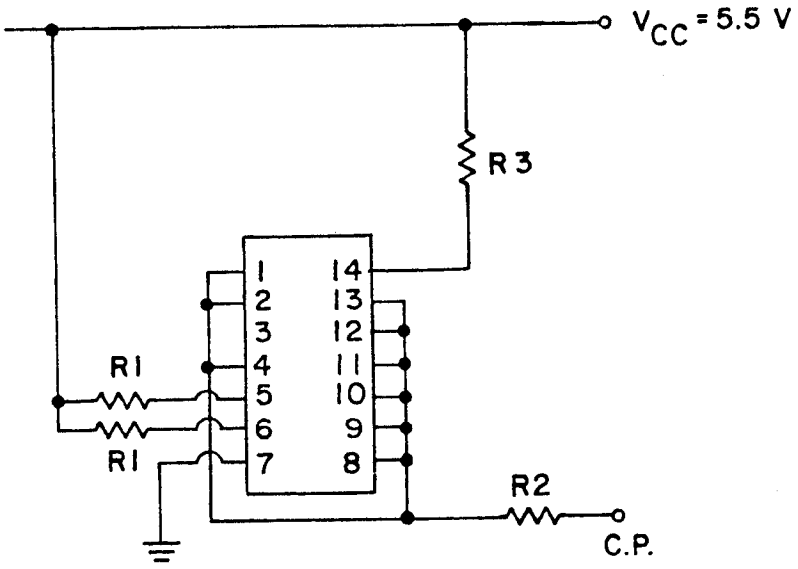


NOTES:

1. C.P. = 100 kHz ±50% square wave; duty cycle = 50 ±15%; V_{IL} = -0.5 V minimum to 0.8 V maximum; V_{IN} = 2.0 V minimum to 5.5 V maximum.
2. R_1 = 240 Ω ±5%, R_2 = 68 Ω ±5%.
3. R_3 and V_{CC} shall be chosen to insure 5.5 V minimum is present at device V_{CC} terminal.

FIGURE 4. Burn-in and life test circuit.

Reprinted without change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:25Z
Check the source to verify that this is the current version before use.

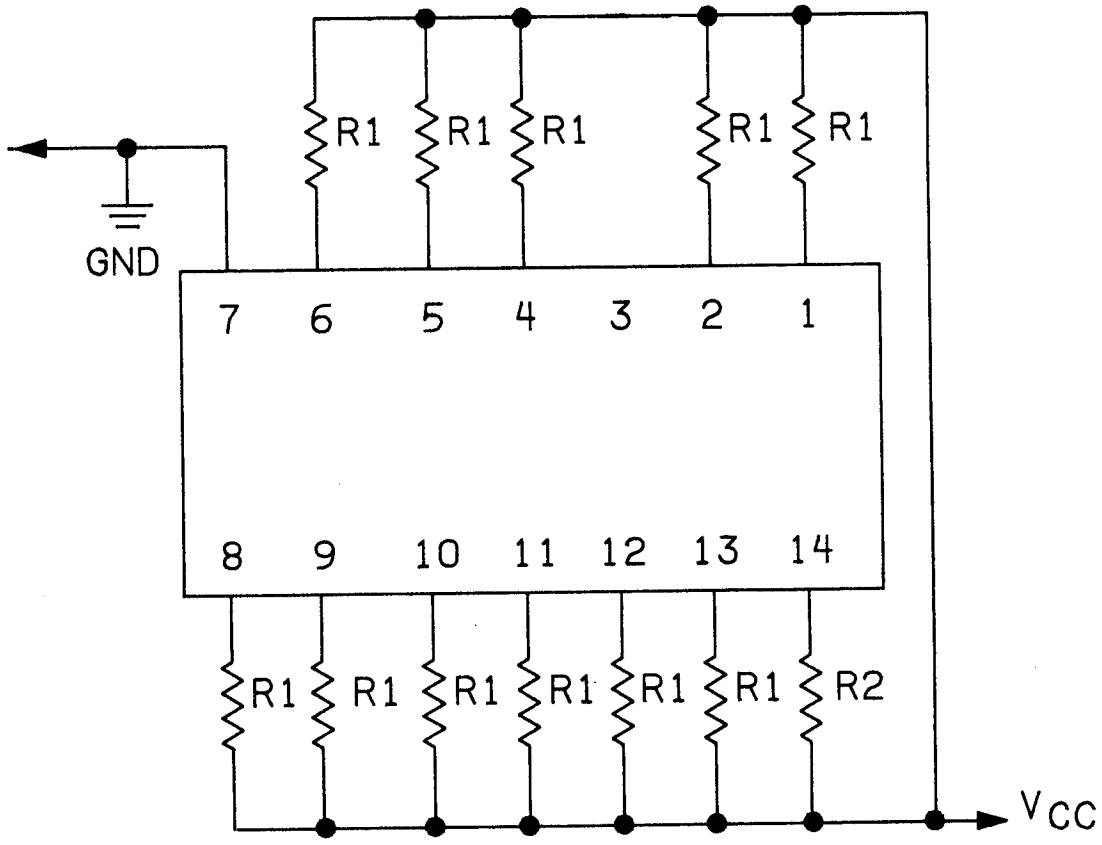

NOTES:
1. High temperature condition F, burn-in circuit only.
2. R1 = 2 kΩ
3. R2 = 2Ω .

FIGURE 4. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:25Z
Check the source to verify that this is the current version before use.

Device type 01

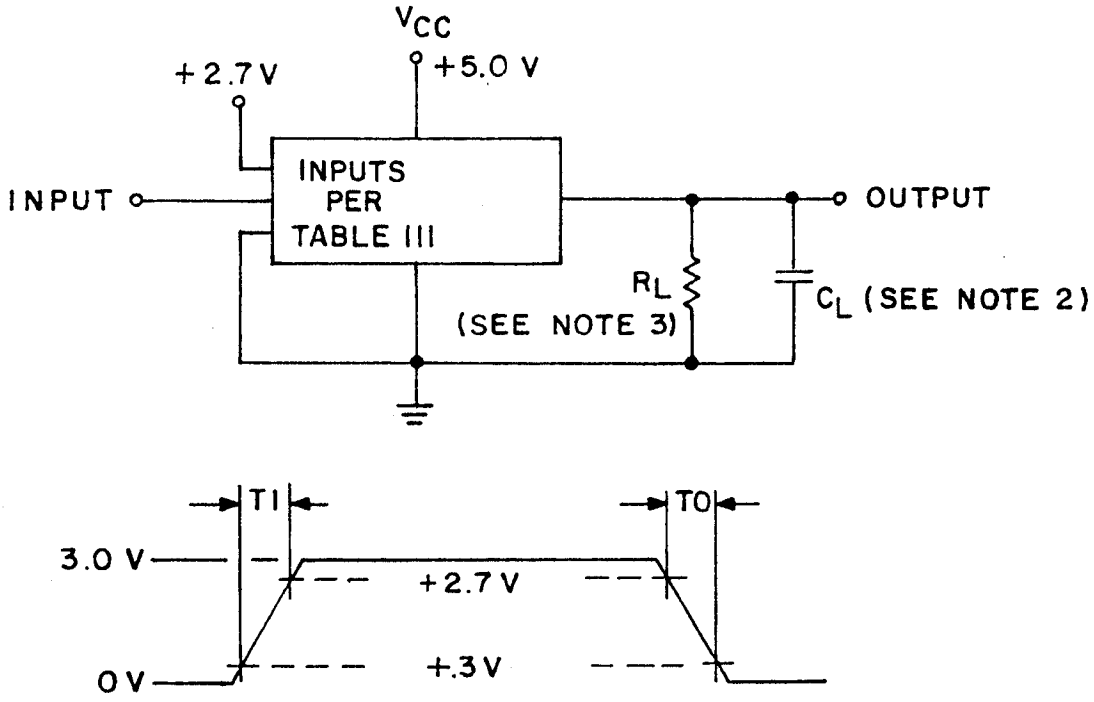


FIGURE 5. Switching time waveforms.

Reprinted without change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:25Z
Check the source to verify that this is the current version before use.