MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SCHOTTKY TTL, HEX BUS DRIVERS WITH 3-STATE OUTPUTS, MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, advanced Schottky TTL, hex bus driver (3-state) microcircuit. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete number part.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	Hex bus driver with 3-state outputs

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outlines. The case outlines shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
E	D-2 (16-lead, 1/4"x 7/8") dual-in-line package
F	F-5 (16-lead, 1/4" x 3/8") flat package
X	C-2A (20-terminal, .350" x .350"), square chip carrier package
2	C-2 (20-terminal, .350" x .350"), square chip carrier package

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc to +7.0 V dc
Input voltage range	-1.2 V dc at -18 mA to +7.0 V dc
Storage temperature range	-65°C to +150°C
Maximum power dissipation (P_D) 1/	
Device type 01	341 mW
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC}):	
Cases E, F	(See MIL-M-38510, appendix C)
Cases X, 2	60°C/W 2/
Junction temperature (T_J) 3/	+175°C

1/ Must withstand the added P_D due to short circuit test (e.g., I_{OS}).
2/ When a thermal resistance value is included in MIL-M-38510, appendix C, it shall supersede the value stated herein.
3/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions in accordance with method 5004 of MIL-STD-883.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

1.4 Recommended operating conditions.

Supply voltage	4.5 V dc minimum to 5.5 V dc maximum
Minimum high-level input voltage (V_{IH})	2.0 V dc
Maximum low-level input voltage (V_{IL})	0.8 V dc
Normalized fanout (each output) 4/	100 maximum
Case operating temperature range (T_C)	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standard. The following specification and standard form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of Department of Defense Index of Specifications and Standards and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Logic diagram. The logic diagram shall be as specified on figure 1.

3.2.3 Truth table. The truth table shall be as specified on figure 2.

3.2.4 Schematic circuits. Schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in this specification and shall be submitted to the qualifying activity and agent activity (DESC-ECS) as a prerequisite for qualification. All qualified manufacturers' schematics shall be maintained by the agent activity and will be available upon request.

4/ The device shall fanout in both high and low levels to the specified number of inputs of the same device type as that being tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

3.2.5 Case outline. The case outlines shall be as specified in 1.2.3.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 and 6.4 herein.

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \leq T_C \leq +125°C$	Device Type	Limits Min	Limits Max	Unit
High-level output voltage	V_{OH}	V_{CC} = 4.5 V, I_{OH} = -3.0 mA V_{IL} = 0.8 V, V_{IH} = 2.0 V	All	2.4		V
Low-level output voltage	V_{OL}	V_{CC} = 4.5 V, I_{OL} = 48 mA V_{IL} = 0.8 V, V_{IH} = 2.0 V	All		0.55	V
Input clamp voltage	V_{IC}	V_{CC} = 4.5 V, I_{IN} = -18 mA T_C = +25°C	All		-1.2	V
High-level input current	I_{IH1} I_{IH2}	V_{CC} = 5.5 V, V_{IN} = 2.7 V V_{CC} = 0.0 V, V_{IN} = 7.0 V	All		30 100	µA µA
Low-level input current	I_{IL1}	V_{CC} = 5.5 V, V_{IL} = 0.5 V	All		-20	µA
Short-circuit output current 1/	I_{OS}	V_{CC} = 5.5 V, V_{OS} = 0.0 V	All	-100	-225	mA
Supply current	I_{CCH} I_{CCL} I_{CCZ}	V_{CC} = 5.5 V	All		35 62 48	mA mA mA
Off-state output leakage current	I_{OZH}	V_{CC} = 5.5 V, V_{ZH} = 2.7 V	All		50	µA
	I_{OZL}	V_{CC} = 5.5 V, V_{ZL} = 0.5 V	All		-50	µA
Propagation delay time (low to high level output)	t_{PLH}	V_{CC} = 5.0 V R_L = See figure 3 C_L = 50 pF ±10%	01	2.0	7.0	ns
Propagation delay time (high to low level output)	t_{PHL}		01	2.0	7.0	ns
Propagation delay time (disabled to high level output)	t_{PZH}		01	2.0	8.5	ns
Propagation delay time (high level to disabled output)	t_{PHZ}		01	1.5	6.5	ns
Propagation delay time (disabled to low level output)	t_{PZL}		01	2.0	8.5	ns
Propagation delay time (low level to disabled output)	t_{PLZ}		01	1.5	9.0	ns

1/ Not more than one output should be shorted at a time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 9 (see MIL-M-38510, appendix E).

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (method 5004)	1	1
Final electrical test parameters (method 5004)	1*,2,3,7, 9,10,11	1*,2,3,7, 9
Group A test requirements (method 5005)	1,2,3,7, 9,10,11	1,2,3,7, 9,10,11
Group B test requirements (method 5005) subgroup 5	1,2,3, 9,10,11	N/A
Group C end-point electrical parameters (method 5005)	N/A	1,2,3
Group D end-point electrical parameters (method 5005)	1,2,3	1,2,3

* PDA applies to subgroup 1 (see 4.2c).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in (method 1015 of MIL-STD-883).

(1) Test condition D, E, or F using the circuit shown on figure 4, or equivalent.

(2) T_A = +125°C minimum.


b. Interim and final electrical test parameters shall be as specified in table II, herein except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:26Z
Check the source to verify that this is the current version before use.

Device type 01

Cases E and F

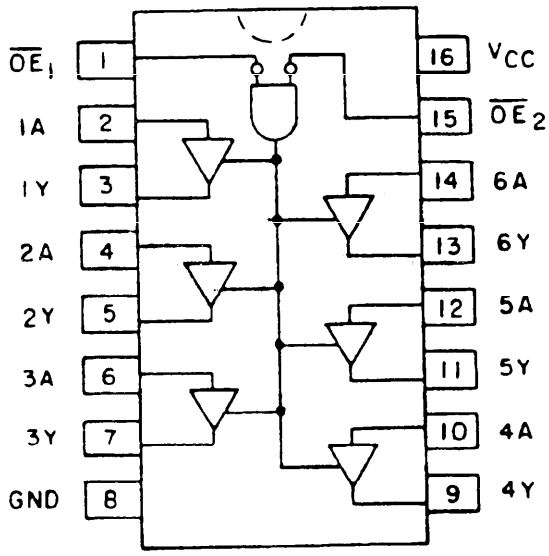

Device type 01

Cases X and 2

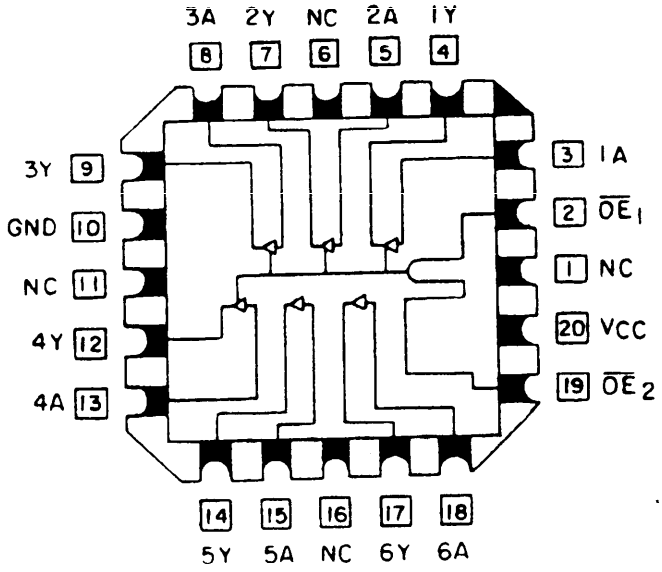


FIGURE 1. Terminal connections and logic diagram (top view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

Device type 01

Inputs			Outputs
$\overline{OE}_1$	$\overline{OE}_2$	A	Y
L	L	L	L
L	L	H	H
X	H	X	Z
H	X	X	Z

H = High level
L = Low level
X = Immaterial
Z = High impedance

FIGURE 2. Truth table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.


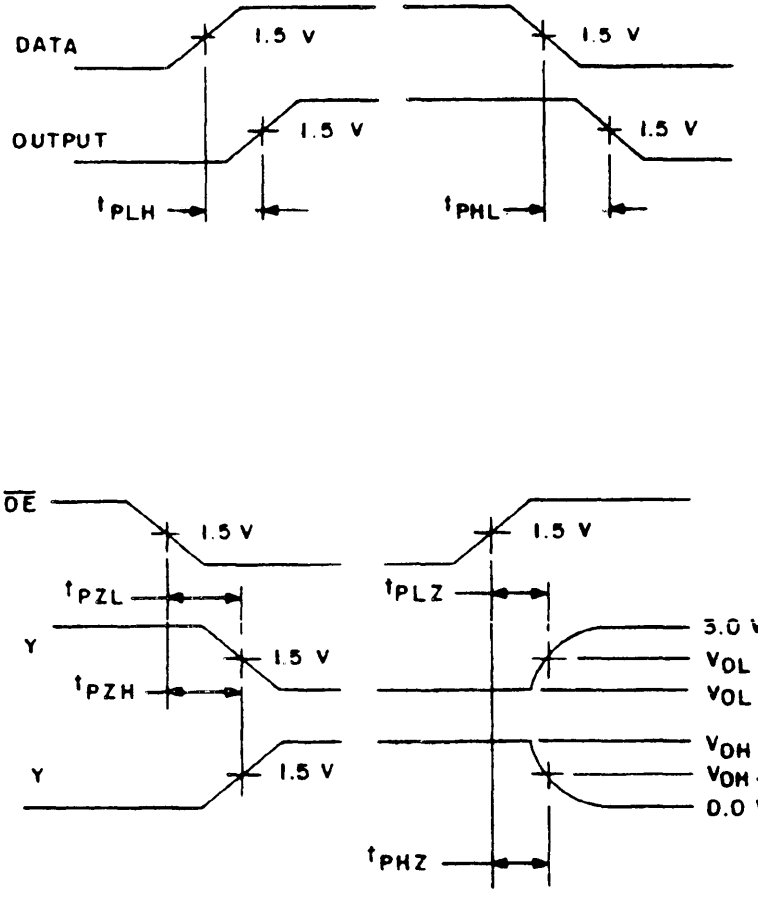


FIGURE 3. Switching time waveforms for device type 01.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:26Z
Check the source to verify that this is the current version before use.

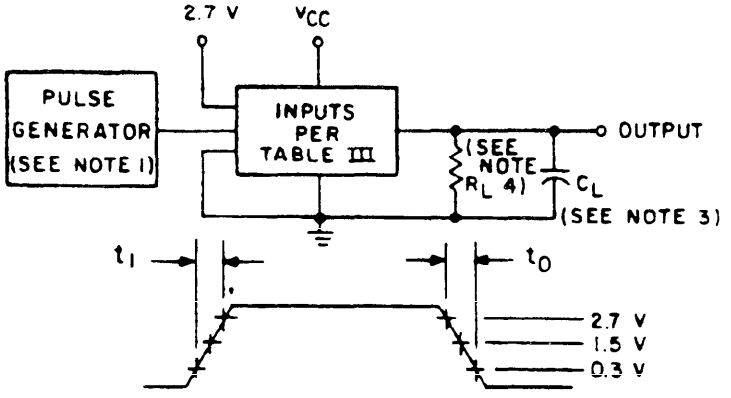


NOTES:
1. Pulse generator has the following characteristics:
   $t_I = t_O \leq 2.5$ ns, PRR $\leq$ 1 MHz, $Z_{OUT} \approx 50\Omega$.
2. Inputs not under test are ground or 2.7 V
3. C_L = 50 pF ±10 percent; including scope probe, wiring and stray capacitance without package in test fixture.
4. R_L = 499Ω ±5 percent.
5. Voltage measurements are to be made with respect to network ground terminal.

FIGURE 3. Switching time waveforms for device type 01 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.


Device type 01

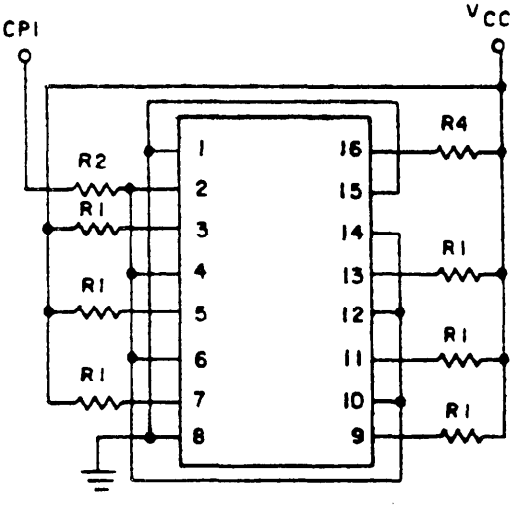

NOTES:
1. CP = 100 kHz ±50 percent square wave; duty cycle = 50 ±15 percent; V_{IL} = 0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. R1 = 240Ω maximum; R2 = 51Ω ±5 percent; R3 = 1 kΩ maximum.
3. V_{CC} and R4 shall be chosen to insure 5.5 V minimum is present at device V_{CC} terminal.

FIGURE 4. Burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:26Z
Check the source to verify that this is the current version before use.

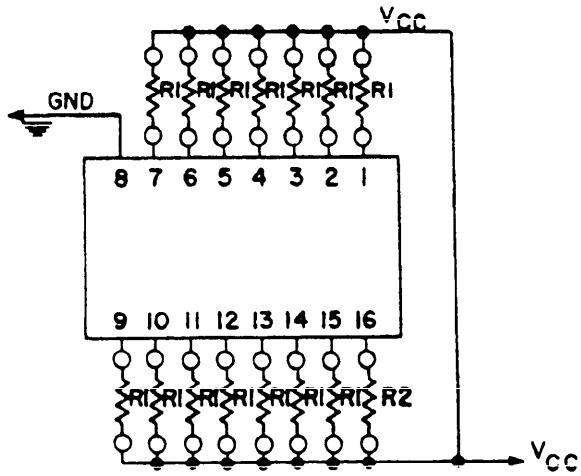

NOTES:
1. High temperature (175°C), condition F, burn-in circuit only.
2. R1 = 2 kΩ. R2 = 2Ω.
3. V_{CC} shall be chosen such that 5.0 V minimum is present at device terminal.

FIGURE 4. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high (≥ 2.0 V), low (≤ 0.8 V), or open.)

Subgroup	Symbol	MIL-STD-883 method	Cases L,F Cases X,Z	1 2	2 3	3 4	4 5	5 7	6 8	7 9	8 10	9 12	10 13	11 14	12 15	13 17	14 18	15 19	16 20	Measured Terminal	Limits Min	Limits Max	Unit
			Test no.	$\overline{OE}_1$	1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	$\overline{OE}_2$	V_{CC}				
1 T_C = +25°C	V_{OH}	3006	1	0.8 V	2.0 V	-3.0 mA												0.8 V	4.5 V	1Y	2.4		V
		"	2	"			2.0 V	-3.0 mA			"							"	"	2Y	"		"
		"	3	"					2.0 V	-3.0 mA	"							"	"	3Y	"		"
		"	4	"							"	-3.0 mA	2.0 V					"	"	4Y	"		"
		"	5	"							"			-3.0 mA	2.0 V			"	"	5Y	"		"
		"	6	"							"					-3.0 mA	2.0 V	"	"	6Y	"		"
	V_{OL}	3007	7	"	0.8 V	4d mA	5.5 V		5.5 V		"		5.5 V		5.5 V		5.5 V	"	"	1Y		0.55	"
		"	8	"	5.5 V		0.8 V	4d mA	5.5 V		"		5.5 V		"		"	"	"	2Y		"	"
		"	9	"	"		5.5 V		0.8 V	48 mA	"		5.5 V		"		"	"	"	3Y		"	"
		"	10	"	"		"		5.5 V		"	48 mA	0.8 V		"		"	"	"	4Y		"	"
		"	11	"	"		"		5.5 V		"		5.5 V	48 mA	0.8 V		"	"	"	5Y		"	"
		"	12	"	"		"		5.5 V		"		5.5 V		5.5 V	48 mA	0.8 V	"	"	6Y		"	"
	V_{IC}		13	-18 mA							"								"	$\overline{OE}_1$		-1.2	"
			14		-18 mA						"								"	1A		"	"
			15				-18 mA				"								"	2A		"	"
			16						-18 mA		"								"	3A		"	"
			17								"								"	4A		"	"
			18								"				-18 mA				"	5A		"	"
			19								"						-18 mA		"	6A		"	"
			20								"							-18 mA	"	$\overline{OE}_2$		"	"
	I_{IH1}	3010	21	2.7 V							"								5.5 V	$\overline{OE}_1$		30	µA
		"	22		2.7 V						"								"	1A		"	"
		"	23				2.7 V				"								"	2A		"	"
		"	24						2.7 V		"								"	3A		"	"
		"	25								"		2.7 V						"	4A		"	"
		"	26								"				2.7 V				"	5A		"	"
		"	27								"						2.7 V		"	6A		"	"
		"	28								"							2.7 V	"	$\overline{OE}_2$		"	"
	I_{IH2}	"	29	7.0 V							"								5.0 V	$\overline{OE}_1$		100	"
		"	30		7.0 V						"								"	1A		"	"
		"	31				7.0 V				"								"	2A		"	"
		"	32						7.0 V		"								"	3A		"	"
		"	33								"		7.0 V						"	4A		"	"
		"	34								"				7.0 V				"	5A		"	"
		"	35								"						7.0 V		"	6A		"	"
		"	36								"							7.0 V	"	$\overline{OE}_2$		"	"
	I_{IL}	3009	37	0.5 V	5.5 V		5.5 V		5.5 V		"		5.5 V		5.5 V		5.5 V	0.0 V	5.5 V	$\overline{OE}_1$		1/	"
		"	38	0.0 V	0.5 V		5.5 V		5.5 V		"		"		"		"	"	"	1A		"	"
		"	39	"	5.5 V		0.5 V		5.5 V		"		"		"		"	"	"	2A		"	"
		"	40	"	"		5.5 V		0.5 V		"		"		"		"	"	"	3A		"	"
		"	41	"	"		"		5.5 V		"		0.5 V		"		"	"	"	4A		"	"
		"	42	"	"		"		"		"		5.5 V		0.5 V		"	"	"	5A		"	"
		"	43	"	"		"		"		"		"		5.5 V		0.5 V	"	"	6A		"	"
		"	44	"	"		"		"		"		"		"		5.5 V	0.5 V	"	$\overline{OE}_2$		"	"
	I_{OS}	3011	45	"	"	0.0 V	"		"		"		"		"		"	0.0 V	"	1Y	-100	-255	mA
		"	46	"	"		"	0.0 V	"		"		"		"		"	"	"	2Y	"	"	"
		"	47	"	"		"		"	0.0 V	"		"		"		"	"	"	3Y	"	"	"
		"	48	"	"		"		"		"	0.0 V	"		"		"	"	"	4Y	"	"	"
		"	49	"	"		"		"		"		"	0.0 V	"		"	"	"	5Y	"	"	"
		"	50	"	"		"		"		"		"		"	0.0 V	"	"	"	6Y	"	"	"
	I_{CCH}	3005	51	"	"		"		"		"		"		"		"	"	"	V_{CC}		35	"
	I_{CCL}	"	52	"	0.0 V		0.0 V		0.0 V		"		0.0 V		0.0 V		0.0 V	"	"	V_{CC}		62	"
	I_{CCZ}	"	53	5.5 V	0.0 V		0.0 V		0.0 V		"		0.0 V		0.0 V		0.0 V	5.5 V	"	V_{CC}		48	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:26Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high (≥ 2.0 V), low (≤ 0.8 V), or open.)

Subgroup	Symbol	MIL-STD-883 method	Cases E, F / Cases X, Z	1 / 2	2 / 3	3 / 4	4 / 5	5 / 7	6 / 8	7 / 9	8 / 10	9 / 12	10 / 13	11 / 14	12 / 15	13 / 17	14 / 18	15 / 19	16 / 20	Measured Terminal	Limits Min	Limits Max	Unit
			Test no.	$\overline{OE}_1$	1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	$\overline{OE}_2$	V_{CC}				
1 T_C = +25°C	I_{OZH}		54	2.0 V	0.0 V	2.7 V	0.0 V	2.7 V	0.0 V	2.7 V	GND	2.7 V	0.0 V	2.7 V	0.0 V	2.7 V	0.0 V	0.0 V	5.5 V	1Y		50	µA
			55	"	"	"	"		"		"		"		"		"	0.0 V	"	2Y		"	"
			56	"	"	"	"		"		"		"		"		"	2.0 V	"	3Y		"	"
			57	"	"	"	"		"		"		"		"		"	"	"	4Y		"	"
			58	0.0 V	"	"	"		"		"		"		"		"	"	"	5Y		"	"
			59	"	"	"	"		"		"		"		"		"	"	"	6Y		"	"
	I_{OZL}		60	"	5.5 V	0.5 V	5.5 V	0.5 V	5.5 V	0.5 V	"	0.5 V	5.5 V	0.5 V	5.5 V	0.5 V	5.5 V	"	"	1Y		-50	"
			61	"	"	"	"		"		"		"		"		"	"	"	2Y		"	"
			62	2.0 V	"	"	"		"		"		"		"		"	"	"	3Y		"	"
			63	"	"	"	"		"		"		"		"		"	"	"	4Y		"	"
			64	"	"	"	"		"		"		"		"		"	"	"	5Y		"	"
			65	"	"	"	"		"		"		"		"		"	0.0 V	"	6Y		"	"
2	Same tests and terminal conditions as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																						
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																						
7 T_C = +25°C	Functional 3/	3014	66	H	H	L	L	H	L	H	GND	L	H	L	H	L	H	H	2/	All Outputs			
		"	67	L	A	H	H	L	H	L	"	H	A	H	A	H	A	A	"	"			
		"	68	H	B	L	A	H	A	H	"	L	B	L	B	L	B	B	"	"			
		"	69	L	A	H	A	B	B	L	"	L	A	H	B	H	B	A	"	"			
9 T_C = +25°C	t_{PLH}	3003	70	3.0 V	IN	OUT	IN	OUT	IN	OUT	"	OUT	IN	OUT	IN	OUT	IN	0.0 V	5.0 V	1A to 1Y	2.5	6.0	ns
		"	71	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2A to 2Y	"	"	"
		"	72	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	3A to 3Y	"	"	"
		"	73	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	4A to 4Y	"	"	"
		"	74	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	5A to 5Y	"	"	"
		"	75	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	6A to 6Y	"	"	"
	t_{PHL}	"	76	"	IN	OUT	IN	OUT	IN	OUT	"	OUT	IN	OUT	IN	OUT	IN	"	"	1A to 1Y	"	"	"
		"	77	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2A to 2Y	"	"	"
		"	78	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	3A to 3Y	"	"	"
		"	79	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	4A to 4Y	"	"	"
		"	80	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	5A to 5Y	"	"	"
		"	81	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	6A to 6Y	"	"	"
	t_{PZH}	"	82	IN	2.7 V	OUT	2.7 V	OUT	2.7 V	OUT	"	OUT	2.7 V	OUT	2.7 V	OUT	2.7 V	"	"	$\overline{OE}_1$ to 1Y	"	9.0	"
		"	83	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_1$ to 2Y	"	"	"
		"	84	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_1$ to 3Y	"	"	"
		"	85	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_1$ to 4Y	"	"	"
		"	86	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_1$ to 5Y	"	"	"
		"	87	"	"	"	"	"	"	"	"	"	"	"	"	"	"	IN	"	$\overline{OE}_1$ to 6Y	"	"	"
		"	88	0.0 V	2.7 V	OUT	2.7 V	OUT	2.7 V	OUT	"	OUT	2.7 V	OUT	2.7 V	OUT	2.7 V	"	"	$\overline{OE}_2$ to 1Y	"	"	"
		"	89	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_2$ to 2Y	"	"	"
		"	90	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_2$ to 3Y	"	"	"
		"	91	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_2$ to 4Y	"	"	"
		"	92	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_2$ to 5Y	"	"	"
		"	93	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	$\overline{OE}_2$ to 6Y	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:26Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Terminal conditions (pins not designated may be high (≥ 2.0 V), low (≤ 0.8 V), or open.)

Subgroup	Symbol	MIL-STD-883 method	Cases E, F Cases X, Z	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured Terminal	Limits Min	Limits Max	Unit
			Test no.	$\overline{OE}_1$	1A	1Y	2A	2Y	3A	3Y	GND	4Y	4A	5Y	5A	6Y	6A	$\overline{OE}_2$	V_{CC}				
9 T_C = +25°C	t_{PZL}	3003	94	IN	0.0 V	OUT	0.0 V	OUT	0.0 V	OUT	GND	OUT	0.0 V	OUT	0.0 V	OUT	0.0 V	0.0 V	5.0 V	$\overline{OE}_1$ to 1Y	2.5	18.0	ns
			95																	$\overline{OE}_1$ to 2Y			
			96																	$\overline{OE}_1$ to 3Y			
			97																	$\overline{OE}_1$ to 4Y			
			98																	$\overline{OE}_1$ to 5Y			
			99																	$\overline{OE}_1$ to 6Y			
			100	0.0 V	0.0 V	OUT	0.0 V	OUT	0.0 V	OUT		OUT	0.0 V	OUT	0.0 V	OUT	0.0 V	IN		$\overline{OE}_2$ to 1Y			
			101																	$\overline{OE}_2$ to 2Y			
			102																	$\overline{OE}_2$ to 3Y			
			103																	$\overline{OE}_2$ to 4Y			
			104																	$\overline{OE}_2$ to 5Y			
			105																	$\overline{OE}_2$ to 6Y			
	t_{PHZ}		106	IN	2.7 V	OUT	2.7 V	OUT	2.7 V	OUT		OUT	2.7 V	OUT	2.7 V	OUT	2.7 V	0.0 V		$\overline{OE}_1$ to 1Y	2.0	5.5	
			107																	$\overline{OE}_1$ to 2Y			
			108																	$\overline{OE}_1$ to 3Y			
			109																	$\overline{OE}_1$ to 4Y			
			110																	$\overline{OE}_1$ to 5Y			
			111																	$\overline{OE}_1$ to 6Y			
			112	0.0 V	2.7 V	OUT	2.7 V	OUT	2.7 V	OUT		OUT	2.7 V	OUT	2.7 V	OUT	2.7 V	IN		$\overline{OE}_2$ to 1Y			
			113																	$\overline{OE}_2$ to 2Y			
			114																	$\overline{OE}_2$ to 3Y			
			115																	$\overline{OE}_2$ to 4Y			
			116																	$\overline{OE}_2$ to 5Y			
			117																	$\overline{OE}_2$ to 6Y			
	t_{PLZ}		118	IN	0.0 V	OUT	0.0 V	OUT	0.0 V	OUT		OUT	0.0 V	OUT	0.0 V	OUT	0.0 V	0.0 V	5.0 V	$\overline{OE}_1$ to 1Y	2.0	7.0	
			119																	$\overline{OE}_1$ to 2Y			
			120																	$\overline{OE}_1$ to 3Y			
			121																	$\overline{OE}_1$ to 4Y			
			122																	$\overline{OE}_1$ to 5Y			
			123																	$\overline{OE}_1$ to 6Y			
			124	0.0 V	0.0 V	OUT	0.0 V	OUT	0.0 V	OUT		OUT	0.0 V	OUT	0.0 V	OUT	0.0 V	IN		$\overline{OE}_2$ to 1Y			
			125																	$\overline{OE}_2$ to 2Y			
			126																	$\overline{OE}_2$ to 3Y			
			127																	$\overline{OE}_2$ to 4Y			
			128																	$\overline{OE}_2$ to 5Y			
			129																	$\overline{OE}_2$ to 6Y			
10	Same tests and terminal conditions as for subgroup 9, except T_C = +125°C and use limits from table I.																						
11	Same tests, terminal conditions, and limits as for subgroup 10, except T_C = -55°C.																						

1/ I_{IL} limits μA maximum values for circuits as shown:

Parameter	Circuit A	Circuit B	Circuit C
I_{IL}	-20		

2/ Perform function sequence at V_{CC} = 4.5 V and repeat at V_{CC} = 5.5 V.

3/ A = 2.4 V minimum; B = 0.55 V or GND, H ≥ 2.5 L ≤ 0.5 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Electrical test requirements shall be as specified in table II herein.

b. Subgroups 4, 5, and 6 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical test requirements shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D, E, or F, using the circuit shown on figure 4, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the reference terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logisitic support of existing equipment.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:26Z
Check the source to verify that this is the currentversion before use.

d. Requirements for notification of change of product or process to the contracting activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5005 of MIL-STD-883), corrective action and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

h. Requirements for JAN marking.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Ground zero voltage potential.
I_{IN}	Current flowing into an input terminal.
V_{IN}	Voltage level at an input terminal.

6.4 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	54F365

6.6 Manufacturers' designators. Manufacturers' circuits which form a part of this specification are designated with an "X" as shown in table IV herein.

TABLE IV. Manufacturers' designations.

Device type	Circuit				
	A Fairchild Semiconductor	B Motorola	C Signetics	D Texas Instrument	E
01	X				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH, TD
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-1020-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/351	Microcircuits, Digital, Bipolar, Advanced Schottky TTL, HEX BUS Drivers With 3-State Outputs, Monolithic Silicon

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-21T14:26Z
Check the source to verify that this is the current version before use.