The documentation and process conversion measures necessary to comply with this document shall be completed by 17 August 2016.

INCH-POUND

MIL-PRF-19500/291W
17 May 2016
SUPERSEDING
MIL-PRF-19500/291V
16 October 2014

PERFORMANCE SPECIFICATION SHEET

* TRANSISTOR, PNP, SILICON, SWITCHING,
TYPES 2N2906A, 2N2907A,
JAN, JANTX, JANTXV, JANS, JANHC, JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

* 1.1 Scope. This specification covers the performance requirements for PNP, silicon, switching transistors. Four levels of product assurance (JAN, JANTX, JANTXV and JANS) are provided for each encapsulated device type as specified in MIL-PRF-19500 and two levels of product assurance(JANHC and JANKC) are provided for each unencapsulated device type. Provisions for radiation hardness assurance (RHA) to eight radiation levels is provided for JANTXV, JANS, JANHC, and JANKC product assurance levels. Radiation hardness assurance (RHA) level designators “M”, “D”, “P“, “L” “R”, “F’, “G”, and “H” are appended to the device prefix to identify devices which have passed RHA requirements.

* 1.2 Physical dimensions. The device packages for the encapsulated device types are as follows: (2N2906A) (similar to a TO-18) in accordance with figure 1,(2N2907AUA) UA in accordance with figure 2, (2N2906AUB) in accordance with figure 3 UB (metal lid, as shield, connected to fourth pad), UBC (ceramic lid, braze-ring connected to fourth pad), UBN (3-pin, isolated metal lid), and UBCN (3-pin, isolated ceramic lid). The dimensions and topography for JANHC and JANKC unencapsulated die is as follows: The B version die in accordance with figure 4, and D version die in accordance with 5 (JANHC and JANKC).

1.3 Maximum ratings. Unless otherwise specified T_A = +25°C.

Types	I_C	V_{CBO}	V_{EBO}	V_{CEO}	T_J and T_{STG}
	mA dc	V dc	V dc	V dc	°C
All devices	-600	-60	-5	-60	-65 to +200

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil .

AMSC N/A

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

1.3 Maximum ratings. Unless otherwise specified T_A = +25°C. - Continued.

Types	P_T T_A = +25°C (1) (2)	P_T T_C = +25°C (1) (2)	P_T $T_{SP(IS)}$ = +25°C (1) (2)	P_T $T_{SP(AM)}$ = +25°C (1) (2)	$R_{\theta JA}$ (2) (3)	$R_{\theta JC}$ (2) (3)	$R_{\theta JSP(IS)}$ (2) (3)	$R_{\theta JSP(AM)}$ (2) (3)
	W	W	W	W	°C/W	°C/W	°C/W	°C/W
2N2906A, L, 2N2907A, L	0.5 0.5	1.0 1.0	N/A N/A	N/A N/A	325 325	150 150	N/A N/A	N/A N/A
2N2906AUA, 2N2907AUA	(4) 0.5 (4) 0.5	N/A N/A	1.0 1.0	1.5 1.5	(4) 325 (4) 325	N/A N/A	110 110	40 40
2N2906AUB, and UBN	(4)0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A
2N2907AUB and UBN	(4) 0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A
2N2906AUBC and UBCN	(4) 0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A
2N2907AUBC and UBCN	(4) 0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A

(1) For derating, see figures 6, 7, 8, 9, and 10.
(2) See 3.3 for abbreviations.
(3) For thermal curves, see figures 11, 12, 13, 14, and 15.
(4) For non-thermal conductive PCB or unknown PCB surface mount conditions in free air, substitute figures 6 and 11 for the UA, UB,, UBC, UBN, and UBCN package and use $R_{\theta JA}$.

1.4 Primary electrical characteristics. Unless otherwise specified T_A = +25°C.

	h_{FE} at V_{CE} = -10 V dc									
	h_{FE1} I_C = -0.1 mA dc		h_{FE2} I_C = -1.0 mA dc		h_{FE3} I_C = -10 mA dc		h_{FE4} (1) I_C = -150 mA dc		h_{FE5} (1) I_C = -500 mA dc	
	2N2906A, L, UA,UB, UBC, UBN, UBCN	2N2907A, L, UA,UB, , UBC, UBN, UBCN	2N2906A L, UA,UB, UBC, UBN, UBCN	2N2907A L, UA,UB, UBC, UBN, UBCN	2N2906A L, UA,UB, UBC, UBN, UBCN	2N2907A L, UA,UB, UBC, UBN, UBCN	2N2906A L, UA,UB, UBC, UBN, UBCN	2N2907A L, UA,UB, UBC, UBN, UBCN	2N2906A L, UA,UB, UBC, UBN, UBCN	2N2907A L, UA,UB, UBC, UBN, UBCN
Min	40	75	40	100	40	100	40	100	40	50
Max			175	450			120	300		

Types	Limit	| h_{fe} | f = 100 MHz V_{CE} = -20 V dc, I_C = -20 mA dc	C_{obo} 100 kHz ≤ f ≤ 1 MHz V_{CB} = -10 V dc, I_E = 0	Switching (saturated) t_{on} See figure 16	Switching (saturated) t_{off} See figure 17
			pF	ns	ns
2N2906A, 2N2907A, L, UA, UB, UBC, UBN, UBCN	Min Max	2.0	8	45	300

Types	Limits	$V_{CE(sat)1}$ (1) I_C = -150 mA dc I_B = -15 mA dc	$V_{CE(sat)2}$ (1) I_C = -500 mA dc I_B = -50 mA dc	$V_{BE(sat)1}$ (1) I_C = -150 mA dc I_B = -15 mA dc	$V_{BE(sat)2}$ (1) I_C = -500 mA dc I_B = -50 mA dc
		V dc	V dc	V dc	V dc
2N2906A, 2N2907A, L, UA, UB, UBC UBN, UBCN	Min Max	-0.4	-1.6	-0.6 -1.3	-2.6

(1) Pulsed see 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

* 1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.5 for PIN construction example and 6.6 for a list of available PINs.

* 1.5.1 JAN certification mark and quality level designators.

* 1.5.1.1 Quality level designators for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", “JANTXV”, and "JANS".

* 1.5.1.2 Quality level designators for unencapsulated devices (die). The quality level designators for unencapsulated devices (die) that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANHC" and "JANKC".

* 1.5.2 Radiation hardness assurance (RHA) designator. The RHA levels that are applicable for this specification sheet from lowest to highest for JANS quality levels are as follows: "M", "D", "P", "L", “R”, “F’, “G”, and “H”.

* 1.5.3 Device type. The designation system for the device types covered by this specification sheet are as follows.

* 1.5.3.1 First number and first letter symbols. The semiconductors of this specification sheet use the first number and letter symbols "2N".

* 1.5.3.2 Second number symbols. The second number symbols for the semiconductors covered by this specification sheet are as follows: "2906".

* 1.5.4 Suffix symbols. The following suffix letters are incorporated in the PIN for this specification sheet.


A	A “A” first suffix symbol indicates encapsulated devices. Applicable for the 2N2909A (see figure 1, similar to TO-18).
UA	Indicates a surface mount 2N2906AUB, (see figure 2)
UB,	Indicates a surface mount 2N2906AUB, (seefigure 3)
HC and KC	Unencapsulated die is as follows: B and D version die in accordance with figure 4 and figure 5.

* 1.5.5 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

* 1.5.6 Die identifiers for unencapsulated devices (manufacturers and critical interface identifiers). The manufacturer die identifiers that are applicable for this specification sheet is "B" and “D”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	
CH	.170	.210	4.32	5.33	
HD	.209	.230	5.31	5.84	
LC	.100 TP		2.54 TP		6
LD	.016	.021	0.41	0.53	7,8
LL	.500	.750	12.70	19.05	7,8,13
LU	.016	.019	0.41	0.48	7,8
L_1		.050		1.27	7,8
L_2	.250		6.35		7,8
P	.100		2.54		
Q		.030		0.76	5
TL	.028	.048	0.71	1.22	3,4
TW	.036	.046	0.91	1.17	3
r		.010		0.25	10
α	45° TP		45° TP		6

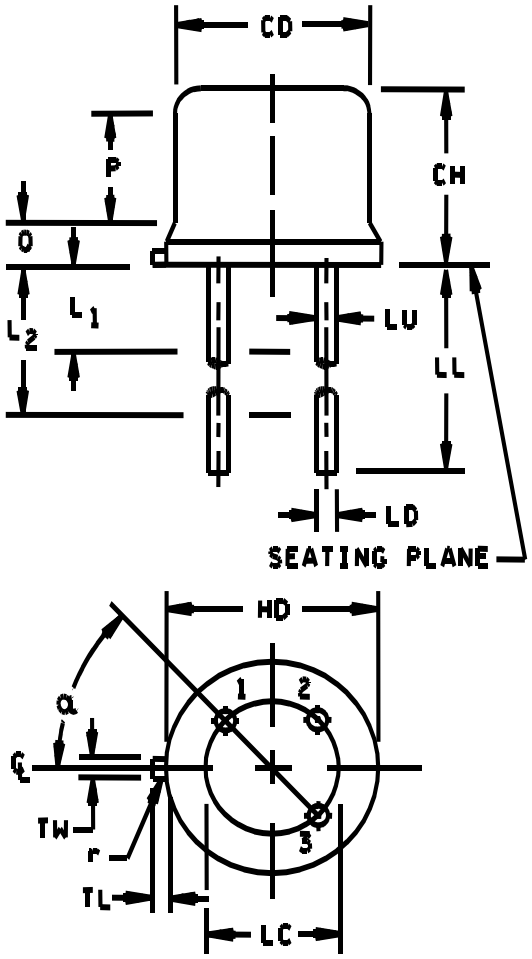


NOTES:

1. Dimension are in inches.
2. Millimeters are given for general information only.
3. Beyond r (radius) maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
7. Dimension LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum. Diameter is uncontrolled in L_1 and beyond LL minimum.
8. All three leads.
9. The collector shall be internally connected to the case.
10. Dimension r (radius) applies to both inside corners of tab.
11. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
12. Lead 1 = emitter, lead 2 = base, lead 3 = collector.
13. For L suffix devices, dimension LL = 1.5 inches (38.10 mm) min. and 1.75 inches (44.45 mm) max.

FIGURE 1. Physical dimensions (similar to TO-18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

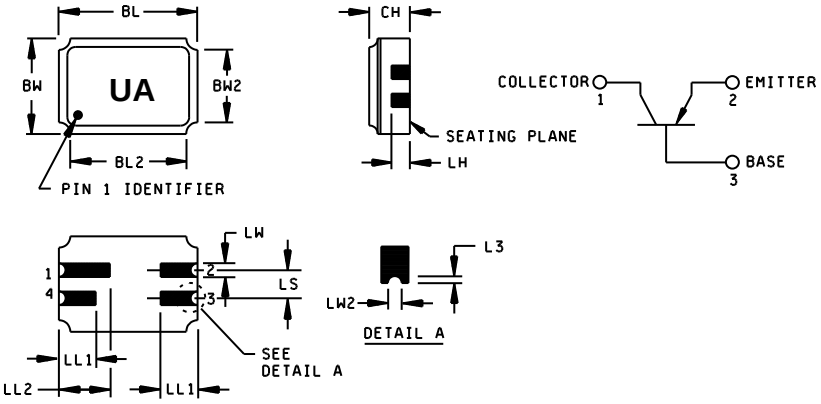

Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
BL	.215	.225	5.46	5.71	
BL2		.225		5.71	
BW	.145	.155	3.68	3.93	
BW2		.155		3.93	
CH	.061	.075	1.55	1.90	3
L3	.003		0.08		5
LH	.029	.042	0.74	1.07	
LL1	.032	.048	0.81	1.22	
LL2	.072	.088	1.83	2.23	
LS	.045	.055	1.14	1.39	
LW	.022	.028	0.56	0.71	
LW2	.006	.022	0.15	0.56	5

Pin no.	1	2	3	4
Transistor	Collector	Emitter	Base	N/C

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Dimension "CH" controls the overall package thickness. When a window lid is used, dimension "CH" must increase by a minimum of .010 inch (0.254 mm) and a maximum of .040 inch (1.020 mm).
4. The corner shape (square, notch, radius) may vary at the manufacturer's option, from that shown on the drawing.
* 5. Dimensions "LW2" minimum and "L3" minimum and the appropriate castellation length define an unobstructed three-dimensional space traversing all of the ceramic layers in which a castellation was designed. (Castellations are required on bottom two layers, optional on top ceramic layer.) Dimension "LW2" maximum define the maximum width and depth of the castellation at any point on its surface. Measurement of these dimensions may be made prior to solder dipping.
6. The coplanarity deviation of all terminal contact points, as defined by the device seating plane, shall not exceed .006 inch (0.15 mm) for solder dipped leadless chip carriers.
7. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 2. Physical dimensions, surface mount (UA version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

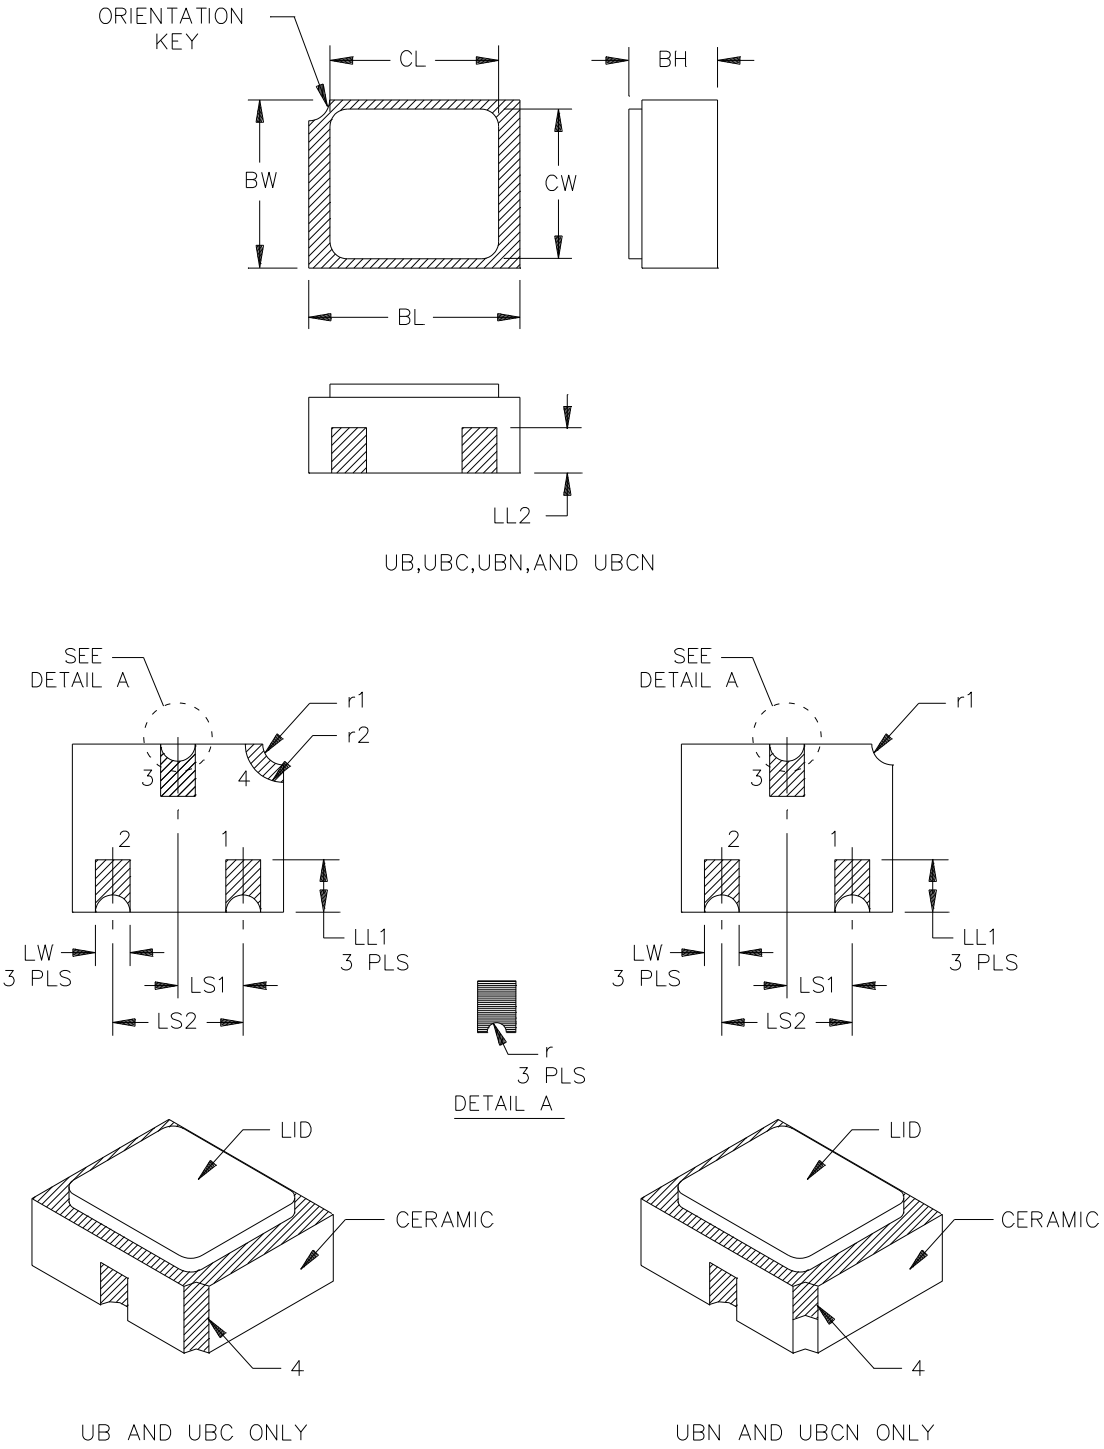


FIGURE 3. Physical dimensions, surface mount (UB, UBN, UBC, and UBCN versions).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
BL	.115	.128	2.92	3.25	
* BW	.085	.108	2.16	2.74	
BH	.046	.056	1.17	1.42	UB only, 4
BH	.046	.056	1.17	1.42	UBN only, 5
BH	.055	.069	1.40	1.75	UBC only, 6
BH	.055	.069	1.40	1.75	UBCN only, 7
CL		.128		3.25	
CW		.108		2.74	
LL1	.022	.038	0.56	0.97	3 PLS
LL2	.014	.035	0.356	0.89	3 PLS
LS_1	.035	.040	0.89	1.02	
LS_2	.071	.079	1.80	2.01	
LW	.016	.024	0.41	0.61	
r		.008		0.20	6
r1		.012		0.30	8
r2		.022		0.56	UB & UBC only, 8

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Hatched areas on package denote metallized areas.
4. UB only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Pad 4 = Shielding connected to the metal lid.
5. UBN only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Isolated lid with three pads only.
6. UBC (ceramic lid) only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Pad 4 = Shielding connected to the lid.
7. UBCN (ceramic lid) only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Isolated lid with 3 pads only.
8. For design reference only.
9. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 3. Physical dimensions, surface mount (UB, UBN, UBC, and UBCN versions) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

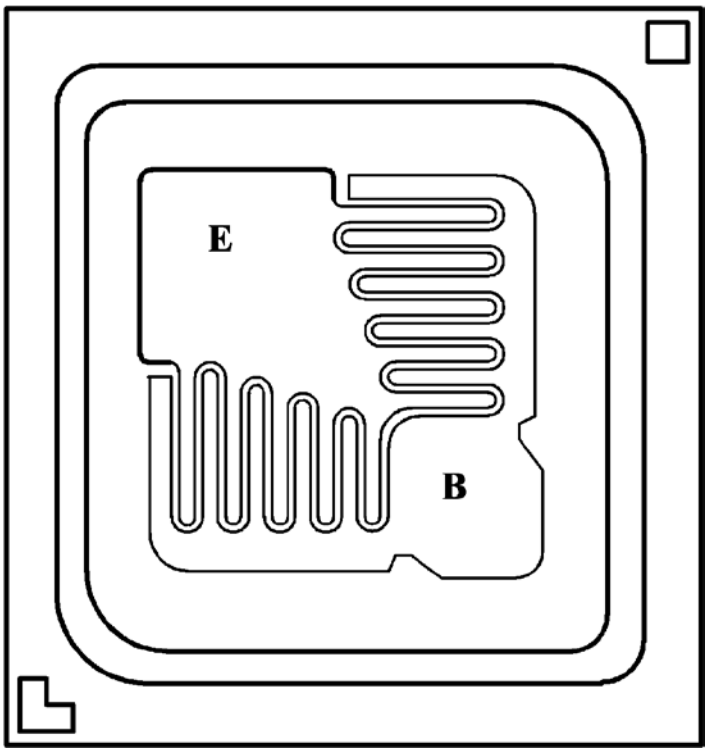

1. Chip size: .023 x .023 inch ±.002 inch (0.584 mm x 0.584 mm ±0.0508 mm).
2. Chip thickness: .010 ±.0015 inch (0.254 mm ±0.038 mm).
3. Top metal: Aluminum 15,000 Å minimum, 18,000 Å nominal.
4. Back metal: A. Al/Ti/Ni/Ag 15kÅ/5kÅ/10kÅ/10kÅ.
   B. Gold 2.5 kÅ minimum, 3.0 kÅ nominal.
   C. Eutectic Die Mount - No metal.
5. Glassivation: SI_3N_4 2kÅ minimum, 2.2k nominal.
6. Backside: Collector.
7. Bonding pad: B = .0042 x .0042 inch (0.107 mm x 0.107 mm).
   E = .0042 x .0042 inch (0.107 mm x 0.107 mm).

FIGURE 4. JANHC and JANKC (B-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

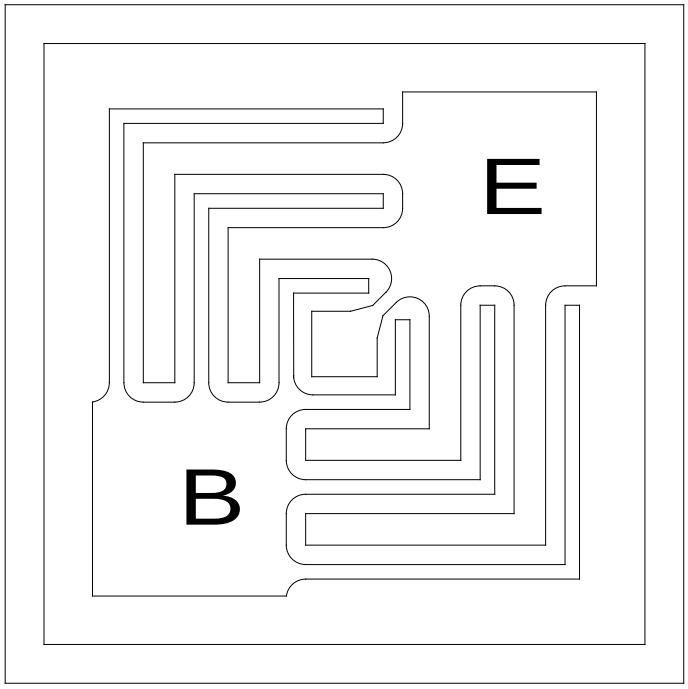

1. Die size: .020 x .020 inch square (0.508 mm x 0.508 mm).
2. Die thickness: .008 ±.0016 inch (0.203 mm ±0.041 mm).
3. Base pad: .004 x .004 inch (0.101 mm x 0.101 mm).
4. Emitter pad: .004 x .004 inch (0.101 mm x 0.101 mm).
5. Back metal Gold, 6,500 ±1,950 Å.
6. Top metal: Aluminum, 20,000 ±2,000 Å.
7. Back side: Collector.
8. Glassivation: SiO_2, 7,500 ±1,500 Å.

FIGURE 5. JANHC and JANKC (D-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://assist.dla.mil/quicksearch).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows.

PCB	Printed circuit board
$R_{\theta JA}$	Thermal resistance junction to ambient.
$R_{\theta JC}$	Thermal resistance junction to case.
$R_{\theta JSP(AM)}$	Thermal resistance junction to solder pads (adhesive mount to PCB).
$R_{\theta JSP(IS)}$	Thermal resistance junction to solder pads (infinite sink mount to PCB).
$T_{SP(AM)}$	Temperature of solder pads (adhesive mount to PCB).
$T_{SP(IS)}$	Temperature of solder pads (infinite sink mount to PCB).
UA,	Surface mount case outlines (see figure 2).
UB, UBC	Surface mount case outlines (see figure 3).
UBN, UBCN	Surface mount case outlines (see figure 3).

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figures 1, 2, 3, 4, and 5 herein. Epoxy die attach may be used when a moisture monitor plan has been submitted and approved by the qualifying activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

3.4.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Radiation hardness assurance (RHA). Radiation hardness assurance requirements, PIN designators, and test levels shall be as defined in MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Marking. Marking shall be in accordance with MIL-PRF-19500, except for the UB, UBC, UBN, and UBCN suffix packages. Marking on the UB, UBC, UBN, and UBCN packages shall consist of an abbreviated part number, the date code, and the manufacturer's symbol or logo. The prefixes JAN, JANTX, JANTXV, and JANS can be abbreviated as J, JX, JV, and JS respectively. The "2N" prefix and the "AUB" and "AUBC" suffix can also be omitted. The radiation hardened designator M, D, P, L, R, F, G, or H shall immediately precede (or replace) the device "2N" identifier (depending upon degree of abbreviation required).

3.9 Workmanship. Semiconductor devices Transistor, PNP, Silicon, Switching shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I, II, and III).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.2.1 JANHC and JANKC qualification. JANHC and JANKC qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

* 4.3 Screening (JANTX, JANTXV, and JANS levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurement	
	JANS level	JANTXV and JANTX level
1b	Required	Required (JANTXV only)
2	Optional	Optional
3a 3b (1) 3c	Required Not applicable Required method 3131 of MIL-STD-750	Required Not applicable Required method 3131 of MIL-STD-750
4	Required	Optional
5	Required	Not required
6	Not applicable	Not applicable
8	Required	Not required
9	I_{CBO2}, h_{FE4}, read and record	Not applicable
10	24 hours minimum	24 hours minimum
11	I_{CBO2}; h_{FE4}; ΔI_{CBO2} = 100 percent of initial value or 5 nA dc, whichever is greater. Δh_{FE4} = ±15 percent	I_{CBO2}, h_{FE4}
12	See 4.3.2	See 4.3.2
(2) 13	Subgroups 2 and 3 of table I herein; ΔI_{CBO2} = 100 percent of initial value or 5 nA dc, whichever is greater; Δh_{FE4} = ±15 percent	Subgroup 2 of table I herein; ΔI_{CBO2} = 100 percent of initial value or 5 nA dc, whichever is greater; Δh_{FE4} = ±15 percent
15	Required	Not required
16	Required	Not required

(1) Shall be performed anytime after temperature cycling, screen 3a; TX and TXV do not need to be repeated in screening requirements.

* (2) Thermal impedance ($Z_{\theta JX}$) is not required in screen 13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

4.3.1 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with MIL-PRF-19500, "Discrete Semiconductor Die/Chip Lot Acceptance". Burn-in duration for the JANKC level follows JANS requirements; the JANHC follows JANTX requirements.

4.3.2 Power burn-in conditions. Power burn-in conditions are as follows: V_{CB} = -10 to -30 V dc. Power shall be applied to achieve T_J = +135°C minimum using a minimum P_D = 75 percent of P_T maximum, T_A ambient rated as defined in 1.3. With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, T_J, and mounting conditions) for JANTX and JANTXV quality levels may be used. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

4.3.3 Thermal impedance measurements). The thermal impedance measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, and t_{MD} (and V_C where appropriate). The thermal impedance limit used in screen 3c of 4.3 herein and subgroup 2 of table I shall comply with the thermal impedance graphs in figures 12, 13, 14, 15, and 16 (less than or equal to the curve value at the same t_H time) and shall be less than the process determined statistical maximum limit as outlined in method 3131. See table III, subgroup 4 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein. If alternate screening is being performed in accordance with MIL-PRF-19500, a sample of screened devices shall be submitted to and pass the requirements of subgroups 1 and 2, of table I herein, inspection only (table E-VIb, group B, subgroup 1 is not required to be performed again if group B has already been satisfied in accordance with 4.4.2).

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIa (JANS) of MIL-PRF-19500 and 4.4.2.1 herein. Electrical measurements (end-points) and delta requirements shall be in accordance with table I, subgroup 2 and 4.5.3 herein. See 4.4.2.2 herein for JAN, JANTX, and JANTXV, group B testing. Electrical measurements (end-points) and delta requirements for JAN, JANTX, and JANTXV, shall be after each step in 4.4.2.2 and shall be in accordance with table I, subgroup 2 and 4.5.3 herein.

4.4.2.1 Group B inspection, table E-VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B4	1037	V_{CB} = -10 to -30 V dc. Adjust device current, or power, to achieve a minimum ΔT_J of 100°C.
B5	1027	V_{CB} = -10 V dc; $P_D \geq$ 100 percent of maximum rated P_T (see 1.3). (NOTE: If a failure occurs, resubmission shall be at the test conditions of the original sample.) Option 1: 96 hours minimum sample size in accordance with MIL-PRF-19500, table E-VIa, adjust T_A or P_D to achieve T_J = +275°C minimum. Option 2: 216 hours minimum, sample size = 45, c = 0; adjusted T_A or P_D to achieve a T_J = +225°C minimum.
B6	3131	$R_{\theta JA}$, $R_{\theta JC}$ only (see 1.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

4.4.2.2 Group B inspection, (JAN, JANTX, and JANTXV). Separate samples may be used for each step. In the event of a lot failure, the resubmission requirements of MIL-PRF-19500 shall apply. In addition, all catastrophic failures during conformance inspection shall be analyzed to the extent possible to identify root cause and corrective action. Whenever a failure is identified as wafer lot and wafer processing related, the entire wafer lot and related devices assembled from the wafer lot shall be rejected unless an appropriate determined corrective action to eliminate the failures mode has been implemented and the devices from the wafer lot are screened to eliminate the failure mode.

Step	Method	Condition
1	1026	Steady-state life: 1,000 hours minimum, V_{CB} = -10 dc, power and ambient shall be applied to achieve T_J = +150°C minimum using a minimum of P_D = 75 percent of maximum rated P_T as defined in 1.3. n = 45 devices, c = 0. The sample size may be increased and the test time decreased so long as the devices are stressed for a total of 45,000 device hours minimum, and the actual time of test is at least 340 hours.
2	1048	Blocking life, T_A = +150°C, V_{CB} = 80 percent of rated voltage, 48 hours minimum. n = 45 devices, c = 0.
3	1032	High-temperature life (non-operating), t = 340 hours, T_A = +200°C. n = 22, c = 0.

4.4.2.3 Group B sample selection. Samples selected from group B inspection shall meet all of the following requirements:

a. For JAN, JANTX,and JANTXV samples shall be selected randomly from a minimum of three wafers (or from each wafer in the lot) from each wafer lot. For JANS, samples shall be selected from each inspection lot. See MIL-PRF-19500.

b. Shall be chosen from an inspection lot that has been submitted to and passed table I, subgroup 2, conformance inspection. When the final lead finish is solder or any plating prone to oxidation at high temperature, the samples for life test (subgroups B4 and B5 for JANS, and group B for JAN, JANTX, and JANTXV) may be pulled prior to the application of final lead finish.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and in 4.4.3.1 (JANS) and 4.4.3.2 (JAN, JANTX, and JANTXV) herein for group C testing. Electrical measurements (end-points) and delta requirements shall be in accordance with table I, subgroup 2 and 4.5.3 herein.

4.4.3.1 Group C inspection, table E-VII (JANS) of MIL-PRF-19500.

	Subgroup	Method	Condition
	C2	2036	Test condition E, (not applicable for UA, UB, UBC, UBN, and UBCN devices).
*	C6	1026	1,000 hours, V_{CB} = -10 V dc, power and ambient temperature shall be applied to the device to achieve T_J = +150°C minimum, and minimum power dissipation of 75 percent of max rated P_T (see 1.3 herein); n = 45, c = 0. The sample size may be increased and the test time decreased as long as the devices are stressed for a total of 45,000 device hours minimum, and the actual time of test is at least 340 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

4.4.3.2 Group C inspection, table E-VII (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition E, (not applicable for UA, UB, UBC, UBN, and UBCN devices).
C5	3131	$R_{\theta JA}$ $R_{\theta JC}$ only (see 1.3).
C6		Not applicable.

4.4.3.3 Group C sample selection. Samples for steps in group C shall be chosen at random from any inspection lot containing the intended package type and lead finish procured to the same specification which is submitted to and passes table I tests for conformance inspection. Testing of a subgroup using a single device type enclosed in the intended package type shall be considered as complying with the requirements for that subgroup.

4.4.4 Group D inspection. Conformance inspection for hardness assured JANS and JANTXV types shall include the group D tests specified in table II herein. These tests shall be performed as required in accordance with MIL-PRF-19500 and method 1019 of MIL-STD-750, for total ionizing dose or method 1017 of MIL-STD-750 for neutron fluence as applicable (see 6.2 herein), except group D, subgroup 2 may be performed separate from other subgroups. Alternate package options may also be substituted for the testing provided there is no adverse effect to the fluence profile.

* 4.4.5 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table E-IX of MIL-PRF-19500 and as specified in table III herein. Delta measurements shall be in accordance with the applicable steps of 4.5.3.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Input capacitance. This test shall be conducted in accordance with method 3240 of MIL-STD-750, except the output capacitor shall be omitted.

4.5.3 Delta requirements. Delta requirements shall be as specified below:

Step	Inspection	MIL-STD-750		Symbol	Limit
		Method	Conditions		
1	Collector-base cutoff current	3036	Bias condition D, V_{CB} = -50 V dc	ΔI_{CB02} (1)	100 percent of initial value or 10 nA dc, whichever is greater.
2	Forward current transfer ratio	3076	V_{CE} = -10 V dc; I_C = -150 mA dc; pulsed see 4.5.1	Δh_{FE4} (1)	±25 percent change from initial reading.

(1) Devices which exceed the table I limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1 2/						
Visual and mechanical inspection 3/	2071					
Solderability 3/ 4/	2026	n = 15 leads, c = 0				
Resistance to solvents 3/ 4/ 5/	1022	n = 15 devices, c = 0				
Temp cycling 3/ 4/	1051	Test condition C, 25 cycles. n = 22 devices, c = 0				
Hermetic seal 4/ Fine leak Gross leak	1071	n = 22 devices, c = 0				
Electrical measurements 4/		Table I, subgroup 2				
Bond strength 3/ 4/	2037	Precondition T_A = +250°C at t = 24 hours or T_A = +300°C at t = 2 hours n = 11 wires, c = 0				
Decap internal visual (design verification) 4/	2075	n = 4 devices, c = 0				
Subgroup 2						
Thermal impedance 6/	3131	See 4.3.3	$Z_{\theta JX}$			°C/W
Collector to base cutoff current	3036	Bias condition D; V_{CB} = -60 V dc	I_{CBO1}		-10	µA dc
Cutoff current, emitter to base	3061	Bias condition D; V_{EB} = -5 V dc	I_{EBO1}		-10	µA dc
Breakdown voltage, collector to emitter	3011	Bias condition D; I_C = -10 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$	-60		V dc
Collector to emitter cutoff current	3041	Bias condition C; V_{CE} = -50 V dc	I_{CES}		-50	nA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = -50 V dc	I_{CBO2}		-10	nA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = -4 V dc	I_{EBO2}		-50	nA dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Forward-current transfer ratio	3076	V_{CE} = -10 V dc; I_C = -0.1 mA dc	h_{FE1}			
2N2906A, L, UA, UB, UBC UBN, and UBCN				40		
2N2907A, L, UA, UB, UBC UBN, and UBCN				75		
Forward-current transfer ratio	3076	V_{CE} = -10 V dc; I_C = -1.0 mA dc	h_{FE2}			
2N2906A, L, UA, UB, UBC UBN, and UBCN				40	175	
2N2907A, L, UA, UB, UBC UBN, and UBCN				100	450	
Forward-current transfer ratio	3076	V_{CE} = -10 V dc; I_C = -10 mA dc	h_{FE3}			
2N2906A, L, UA, UB, UBC UBN, and UBCN				40		
2N2907A, L, UA, UB, UBC UBN, and UBCN				100		
Forward-current transfer ratio	3076	V_{CE} = -10 V dc; I_C = -150 mA dc; pulsed (see 4.5.1)	h_{FE4}			
2N2906A, L, UA, UB, UBC UBN, and UBCN				40	120	
2N2907A, L, UA, UB, UBC UBN, and UBCN				100	300	
Forward-current transfer ratio	3076	V_{CE} = -10 V dc; I_C = -500 mA dc; pulsed (see 4.5.1)	h_{FE5}			
2N2906A, L, UA, UB, UBC UBN, and UBCN				40		
2N2907A, L, UA, UB, UBC UBN, and UBCN				50		
Collector-emitter saturation voltage	3071	I_C = -150 mA dc; I_B = -15 mA dc, pulsed (see 4.5.1)	$V_{CE(sat)1}$		-0.4	V dc
Collector-emitter saturation voltage	3071	I_C = -500 mA dc; I_B = -50 mA dc; pulsed (see 4.5.1)	$V_{CE(sat)2}$		-1.6	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = -150 mA dc; I_B = -15 mA dc; pulsed (see 4.5.1)	$V_{BE(sat)1}$	-0.6	-1.3	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = -500 mA dc; I_B = -50 mA dc; pulsed (see 4.5.1)	$V_{BE(sat)2}$		-2.6	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High temperature operation		T_A = +150°C				
Collector to base cutoff current	3036	Bias condition D; V_{CB} = -50 V dc	I_{CBO3}		-10	µA dc
Low temperature operation		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = -10 V dc; I_C = -10 mA dc	h_{FE6}			
2N2906A, L, UA, UB, UBC, UBN, and UBCN				20		
2N2907A, L, UA, UB, UBC, UBN, and UBCN				50		
Subgroup 4						
Small-signal short-circuit forward current transfer ratio	3206	V_{CE} = -10 V dc; I_C = -1 mA dc; f = 1 kHz	h_{fe}			
2N2906A, L, UA, UB, UBC, UBN, and UBCN				40		
2N2907A, L, UA, UB, UBC, UBN, and UBCN				100		
Magnitude of small- signal short- circuit forward current transfer ratio	3306	V_{CE} = -20 V dc; I_C = -20 mA dc; f = 100 MHz	$\|h_{fe}\|$	2.0		
Open circuit output capacitance	3236	V_{CB} = -10 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		8	pF
Input capacitance (output open- circuited)	3240	V_{EB} = -2.0 V dc; I_C = 0; 100 kHz ≤ f ≤ 1 MHz See 4.5.2.	C_{ibo}		30	pF
Saturated turn-on time		(See figure 16)	t_{on}		45	ns
Saturated turn-off time		(See figure 17)	t_{off}		300	ns
Subgroups 5, 6, and 7						
Not applicable						

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

1/ For sampling plan see MIL-PRF-19500.
2/ For resubmission of failed test subgroup of table I, double the sample size of the failed test or sequence of tests. A failure in table I, subgroup 1 shall not require retest of the entire subgroup. Only the failed test shall be rerun upon submission.
3/ Separate samples may be used.
4/ Not required for JANS devices.
5/ Not required for laser marked devices.
6/ This test required for the following end-point measurements only:
Group B, subgroup 3, 4, and 5 (JANS).
Group B, step 1 (TX and TXV).
Group C, subgroup 2 and 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection.

Inspection 1/ 2/ 3/	MIL–STD–750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1 4/						
Neutron irradiation	1017	Neutron exposure V_{CES} = 0 V				
Collector to base cutoff current	3036	Bias condition D; V_{CB} = -60 V dc	I_{CBO1}		-20	µA dc
Cutoff current, emitter to base	3061	Bias condition D; V_{EB} = -5 V dc	I_{EBO1}		-20	µA dc
Breakdown voltage, collector to emitter	3011	Bias condition D; I_C = -10 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$	-60		V dc
Collector to emitter cutoff current	3041	Bias condition C; V_{CE} = -50 V dc	I_{CES}		-100	nA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = -50 V dc	I_{CBO2}		-20	nA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = -4 V dc	I_{EBO2}		-100	nA dc
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -0.1 mA dc	[h_{FE1}] 5/	 [20] [37.5]		
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -1.0 mA dc	[h_{FE2}] 5/	 [20] [50]	 175 450	
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -10 mA dc	[h_{FE3}] 5/	 [20] [50]		
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -150 mA dc	[h_{FE4}] 5/	 [20] [50]	 120 300	
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -500 mA dc	[h_{FE5}] 5/	 [20] [25]		
Collector-emitter saturation voltage	3071	I_C = -150 mA dc; I_B = -15 mA dc	$V_{CE(sat)1}$		-.46	V dc
Collector-emitter saturation voltage	3071	I_C = -500 mA dc; I_B = -50 mA dc	$V_{CE(sat)2}$		-1.84	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = -150 mA dc; I_B = -15 mA dc; pulsed (see 4.5.1)	$V_{BE(sat)1}$	-0.6	-1.5	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = -500 mA dc; I_B = -50 mA dc; pulsed (see 4.5.1)	$V_{BE(sat)2}$		-3.0	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection - Continued.

Inspection 1/ 2/ 3/	MIL–STD–750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2						
Total dose irradiation	1019	Gamma exposure V_{CES} = -48 V				
Collector to base cutoff current	3036	Bias condition D; V_{CB} = -60 V dc	I_{CBO1}		-20	µA dc
Cutoff current, emitter to base	3061	Bias condition D; V_{EB} = -5 V dc	I_{EBO1}		-20	µA dc
Breakdown voltage, collector to emitter	3011	Bias condition D; I_C = -10 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$	-60		V dc
Collector to emitter cutoff current	3041	Bias condition C; V_{CE} = -50 V dc	I_{CES}		-100	nA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = -50 V dc	I_{CBO2}		-20	nA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = -4 V dc	I_{EBO2}		-100	nA dc
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -0.1 mA dc	[h_{FE1}] 5/	 [20] [37.5]		
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -1.0 mA dc	[h_{FE2}] 5/	 [20] [50]	 175 400	
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -10 mA dc	[h_{FE3}] 5/	 [20] [50]		
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -150 mA dc	[h_{FE4}] 5/	 [20] [50]	 120 300	
Forward-current transfer ratio M through H2N2906A M through H2N2907A	3076	V_{CE} = -10 V dc; I_C = -500 mA dc	[h_{FE5}] 5/	 [20] [25]		
Collector-emitter saturation voltage	3071	I_C = -150 mA dc; I_B = -15 mA dc;	$V_{CE(sat)1}$		-.46	V dc
Collector-emitter saturation voltage	3071	I_C = -500 mA dc; I_B = -50 mA dc;	$V_{CE(sat)2}$		-1.84	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection - Continued.

Inspection 1/ 2/ 3/	MIL–STD–750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued.						
Base-emitter saturation voltage	3066	Test condition A; I_C = -150 mA dc; I_B = -15 mA dc; pulsed (see 4.5.1)	$V_{BE(sat)1}$	-0.6	-1.5	V dc
Base-emitter saturation voltage	3066	Test condition A; I_C = -500 mA dc; I_B = -50 mA dc; pulsed (see 4.5.1)	$V_{BE(sat)2}$		-3.0	


1/ Tests to be performed on all devices receiving radiation exposure.
2/ For sampling plan, see MIL-PRF-19500.
3/ Electrical characteristics apply to the corresponding AL, UA, UB, UBC, UBN, and UBCN suffix versions unless otherwise noted.
4/ See 6.2.f herein.
5/ See method 1019, of MIL–STD–750, for how to determine [h_{FE}] by first calculating the delta ($1/h_{FE}$) from the pre- and post-radiation h_{FE}. Notice the [h_{FE}] is not the same as h_{FE} and cannot be measured directly. The [h_{FE}] value can never exceed the pre-radiation minimum h_{FE} that it is based upon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

TABLE III. Group E inspection (all quality levels) - for qualification only.

Inspection	MIL–STD–750		Qualification
	Method	Conditions	
Subgroup 1			45 devices c = 0
Temperature cycling (air to air)	1051	Test condition C, 500 cycles.	
Hermetic seal	1071		
Fine leak Gross leak			
Electrical measurements		See table I, subgroup 2 and 4.5.3 herein.	
Subgroup 2			45 devices c = 0
Intermittent life	1037	V_{CB} = -10 V dc, 6,000 cycles. Adjust device current, or power, to achieve a minimum ΔT_J of 100°C.	
Electrical measurements		See table I, subgroup 2 and 4.5.3 herein.	
Subgroup 4			15 devices c = 0
Thermal resistance	3131	$R_{\theta JSP(IS)}$ may be calculated but shall be measured once in the same package with a similar die size to confirm calculations (may apply to multiple slash sheets). $R_{\theta JSP(AM)}$ need be calculated only.	
Thermal impedance curves		See MIL-PRF-19500, table E-IX, group E, subgroup 4.	Sample size N/A
Subgroup 5			
Not applicable			
Subgroup 6			11 devices
ESD	1020		
Subgroup 8			45 devices c = 0
Reverse stability	1033	Condition B.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

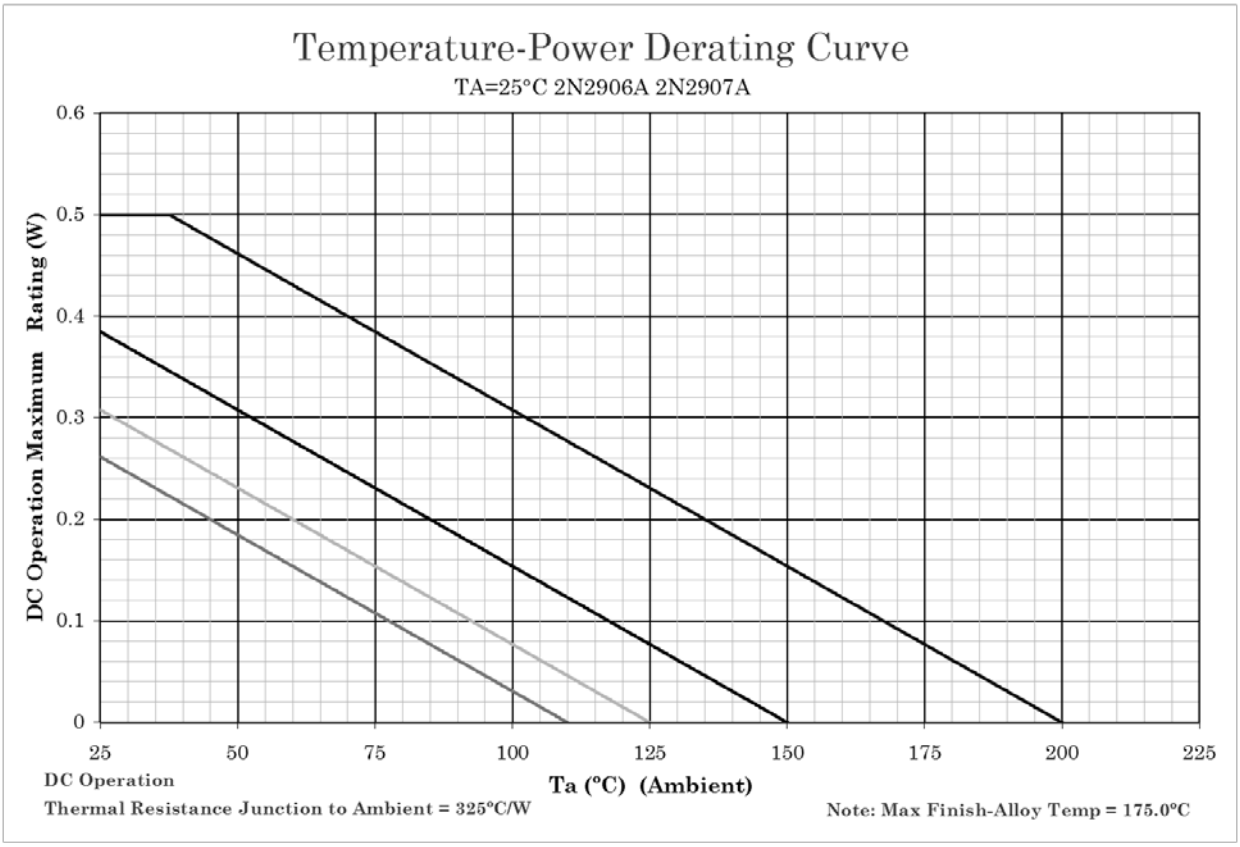


NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperatures and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq +150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq +125°C$, and +110°C to show power rating where most users want to limit T_J in their application.

FIGURE 6. Temperature-power derating for 2N2906A, 2N2906AL, 2N2907A and 2N2907AL ($R_{\theta JA}$) leads .125 inch (3.18 mm) PCB (TO-18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

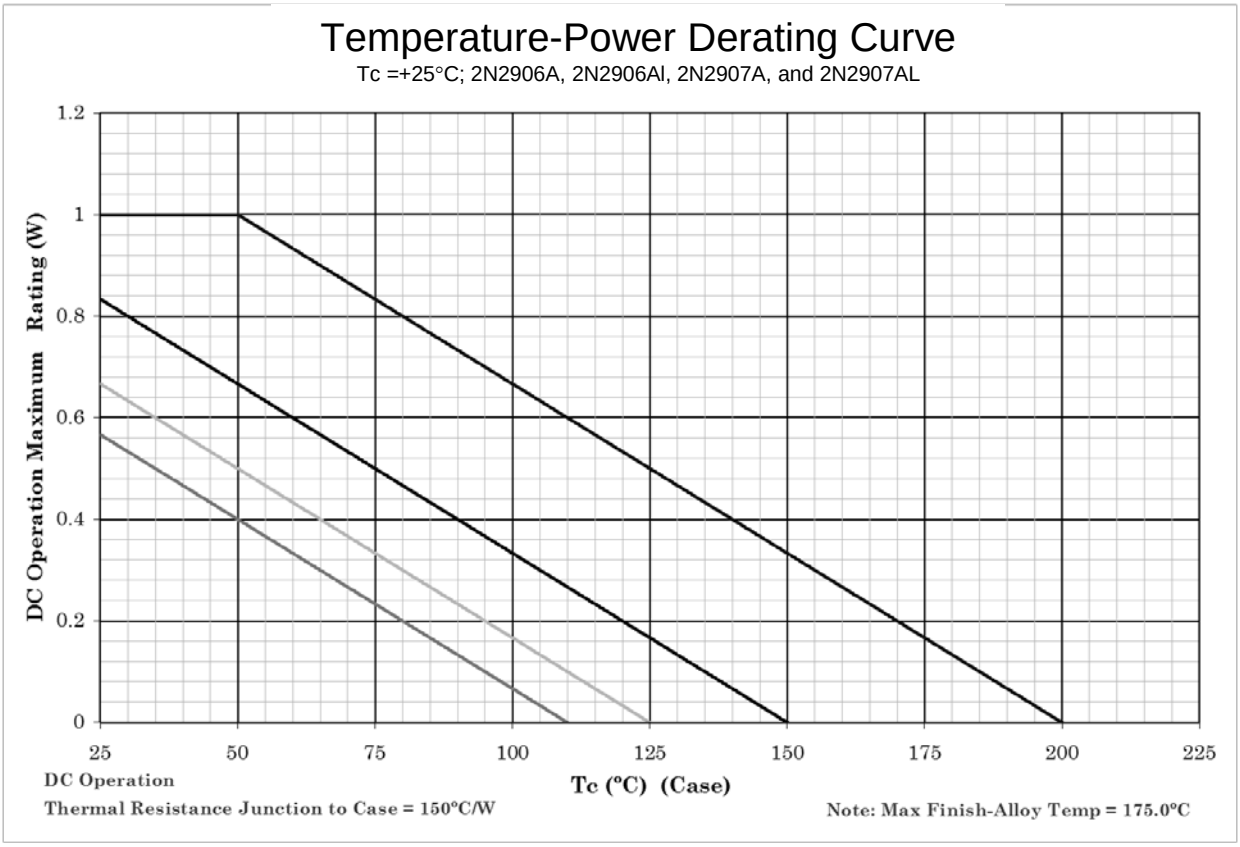


NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperatures and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq +150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq +125°C$, and +110°C to show power rating where most users want to limit T_J in their application.

FIGURE 7. Temperature-power derating for 2N2906A, 2N2906AL, 2N2907A and 2N2907AL ($R_{\theta JC}$), base case mount (TO-18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

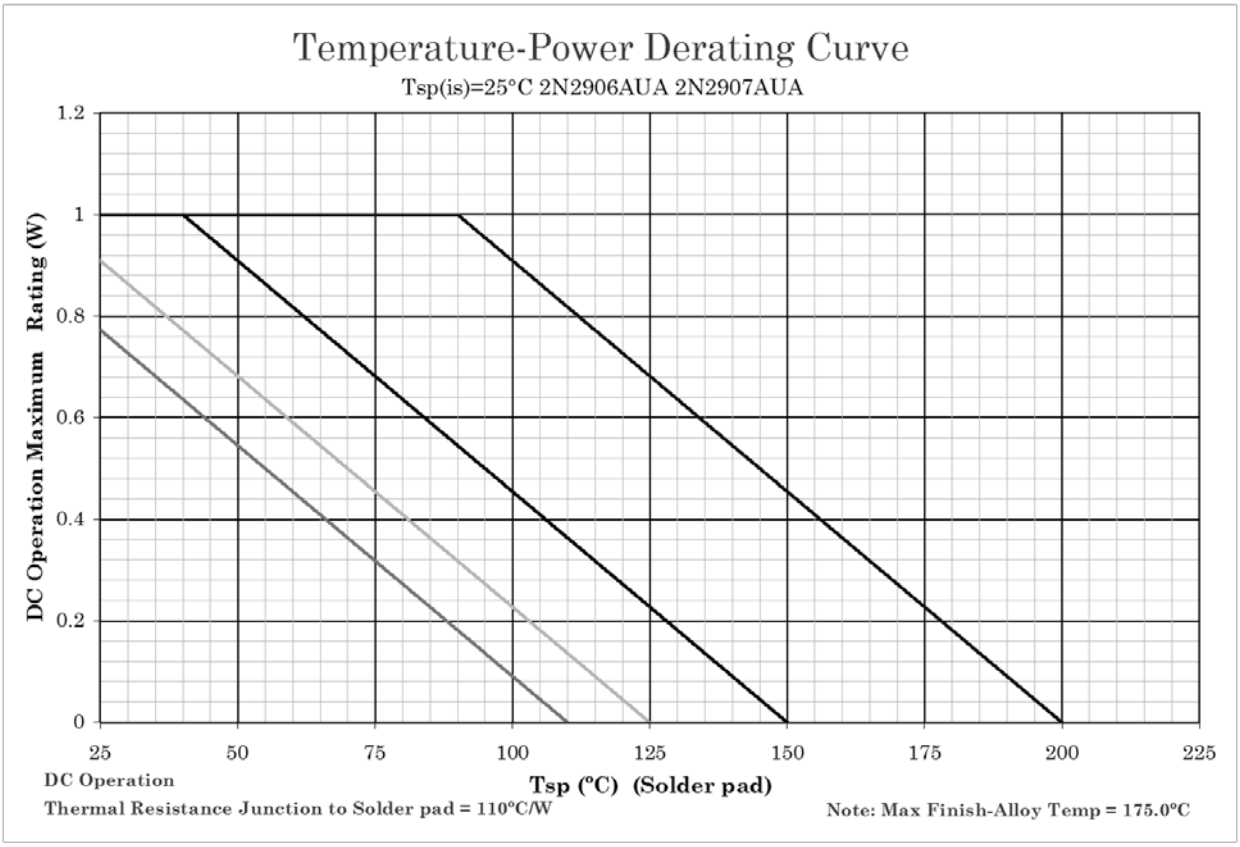


NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperatures and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq +150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq +125°C$, and +110°C to show power rating where most users want to limit T_J in their application.

FIGURE 8. Temperature-power derating for 2N2906AUA and 2N2907AUA ($R_{\theta JSP(IS)}$), infinite sink 4-points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

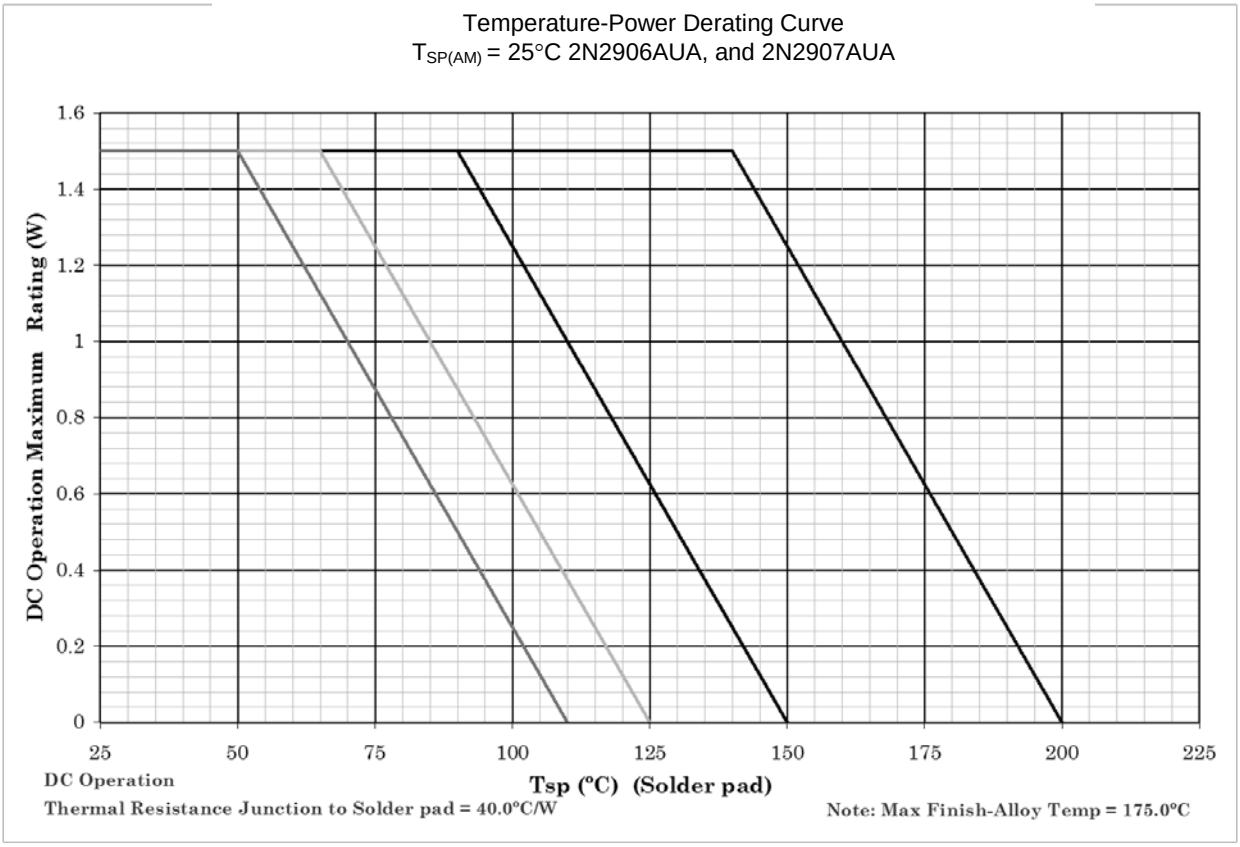


NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperatures and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq +150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq +125°C$, and +110°C to show power rating where most users want to limit T_J in their application.

FIGURE 9. Temperature-power derating for 2N2906AUA and 2N2907AUA ($R_{\theta JSP(AM)}$) 4-point solder pad (adhesive mount to PCB).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

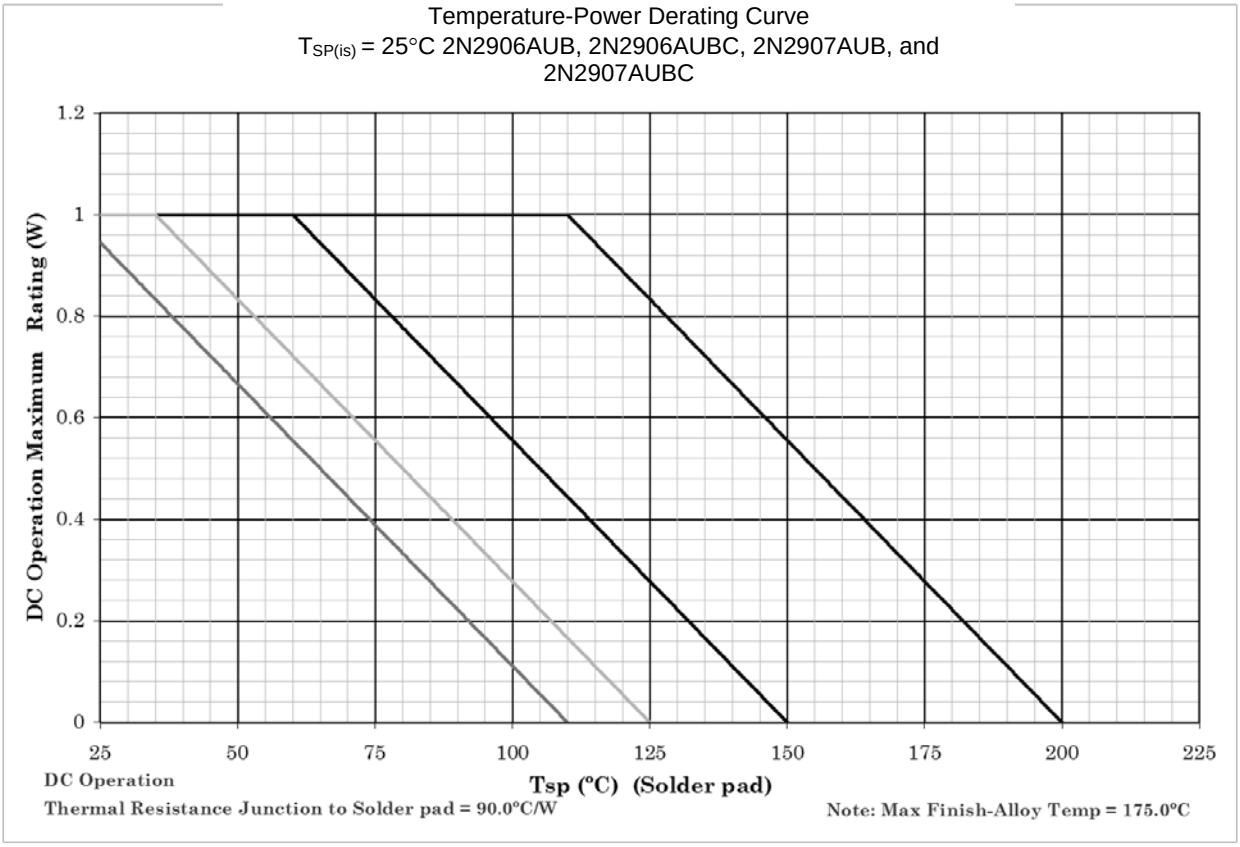

NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperatures and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq +150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq +125°C$, and +110°C to show power rating where most users want to limit T_J in their application.

FIGURE 10. Temperature-power derating for 2N2906AUB, UBC, UBN, and UBCN
2N2907AUB, UBC,UBN, and UBCN ($R_{\theta JSP(IS)}$) infinite sink 3-point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

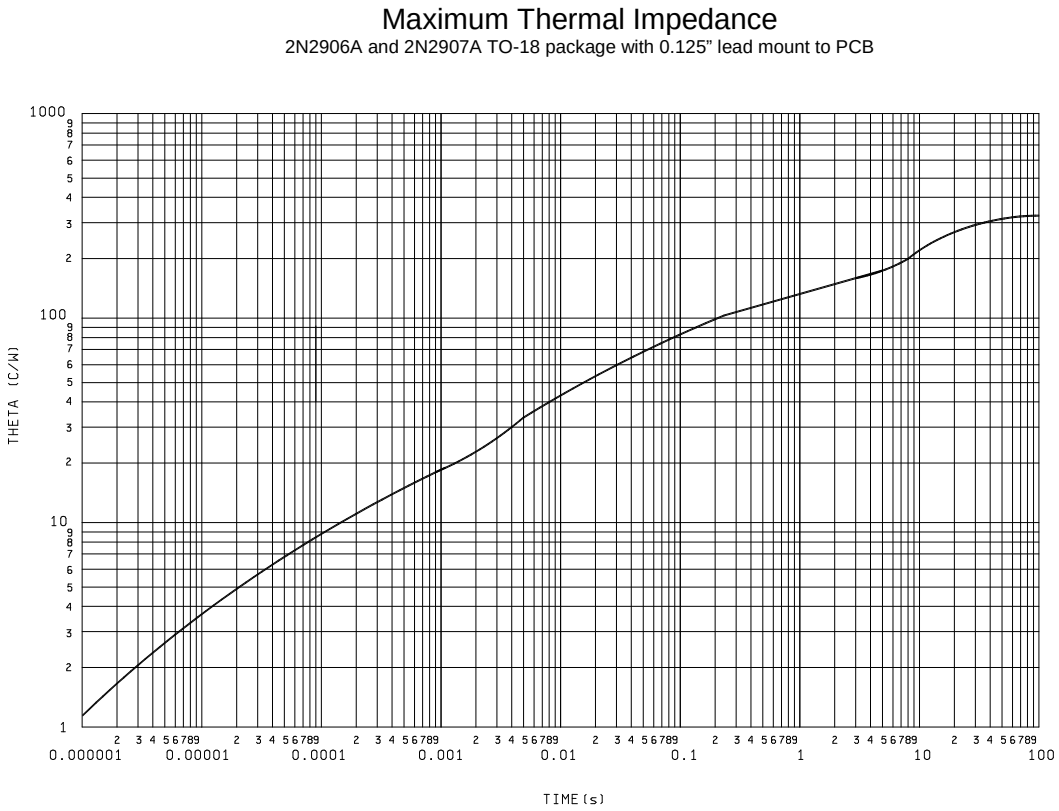


FIGURE 11. Thermal impedance graph ($R_{\theta JA}$) for 2N2906A, 2N2906AL, 2N2907A, and 2N2907AL (TO-18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

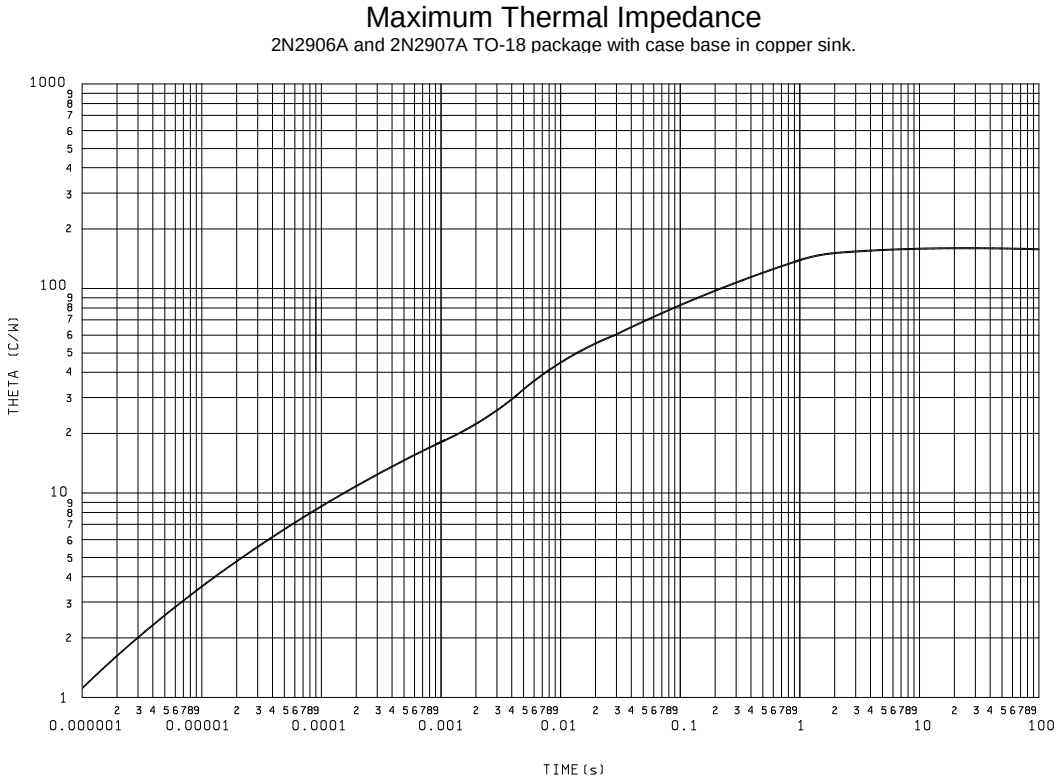


FIGURE 12. Thermal impedance graph ($R_{\theta JC}$) for 2N2906A, 2N2906AL, 2N2907A, and 2N2907AL (TO-18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

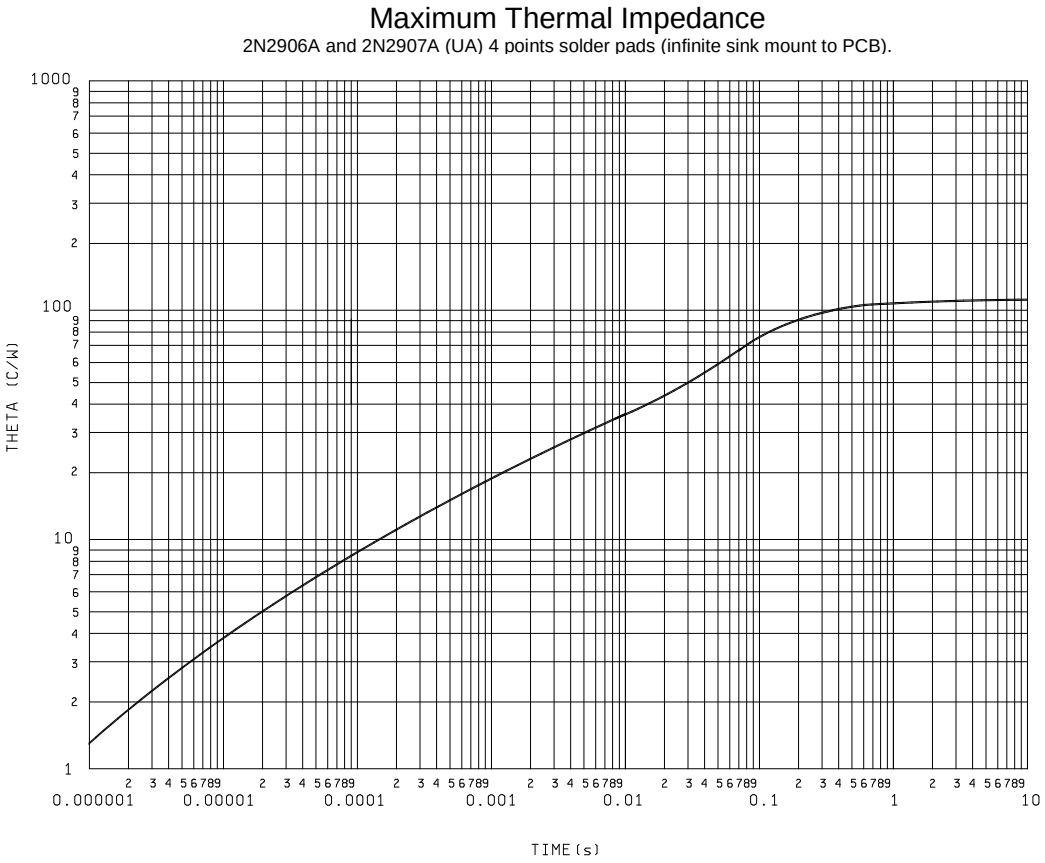


FIGURE 13. Thermal impedance graph ($R_{\theta JSP(IS)}$) for 2N906A and 2N2907A (UA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

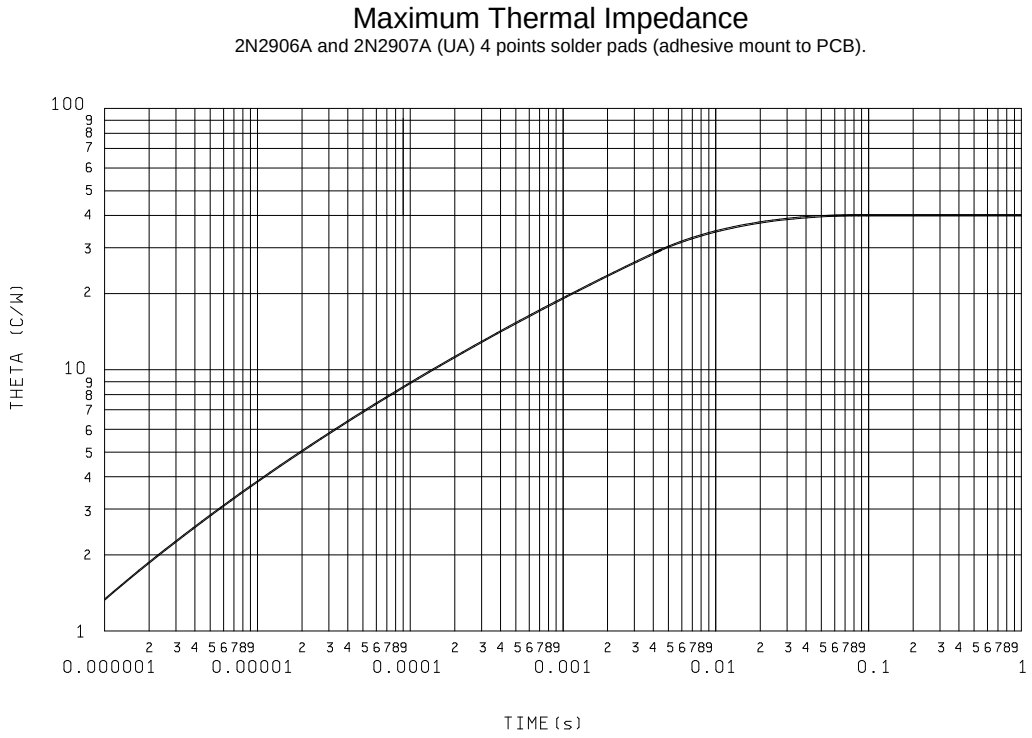


FIGURE 14. Thermal impedance graph ($R_{\theta JSP(AM)}$) for 2N906A and 2N2907A (UA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.


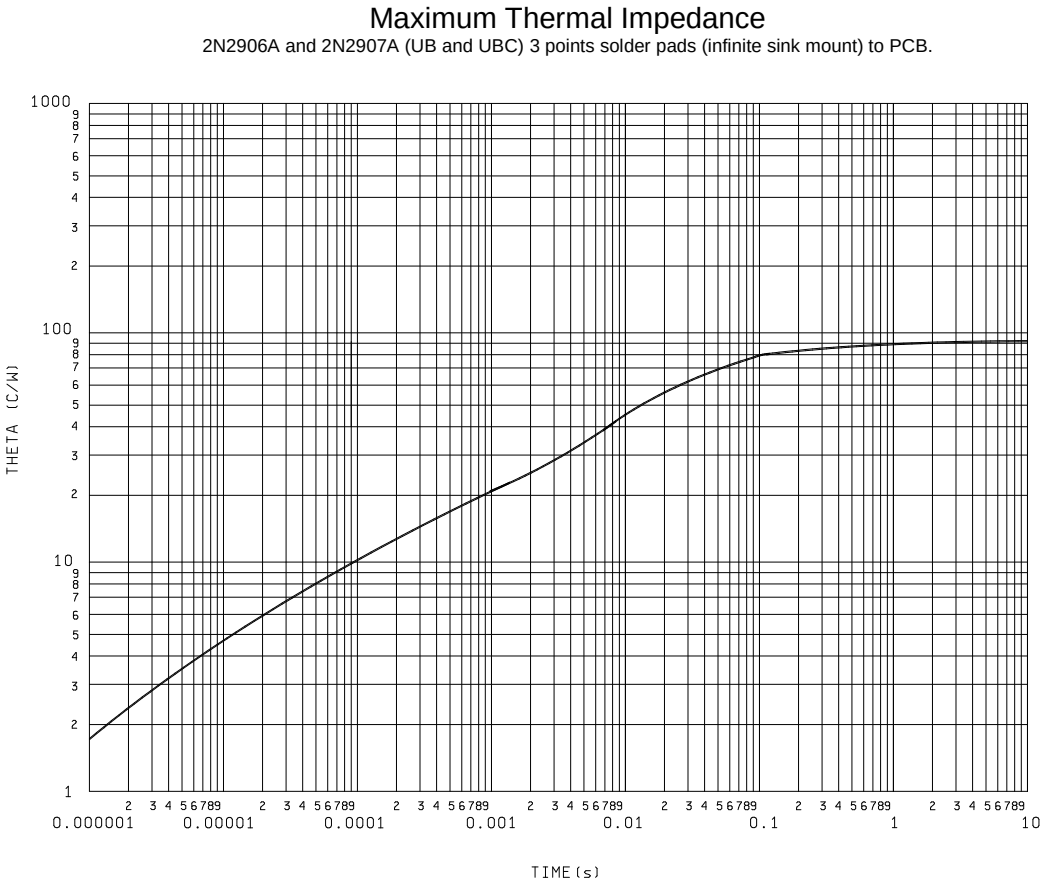


FIGURE 15. Thermal impedance graph ($R_{\theta JSP(IS)}$) for 2N906A and 2N2907A (UB, UBC, UBN, and UBCN).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

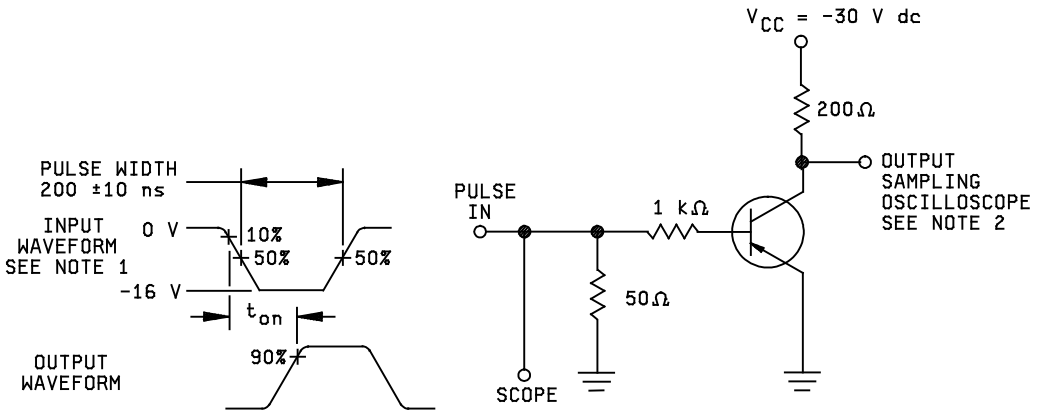

NOTES:

1. The rise time (t_r) of the applied pulse shall be ≤ 2.0 ns, duty cycle ≤ 2 percent and the generator source impedance shall be 50 ohms.
2. Sampling oscilloscope: Z_{in} ≥ 100 K ohms, C_{in} ≤ 12 pF, rise time ≤ 5 ns.

FIGURE 16. Saturated turn-on switching time test circuit.

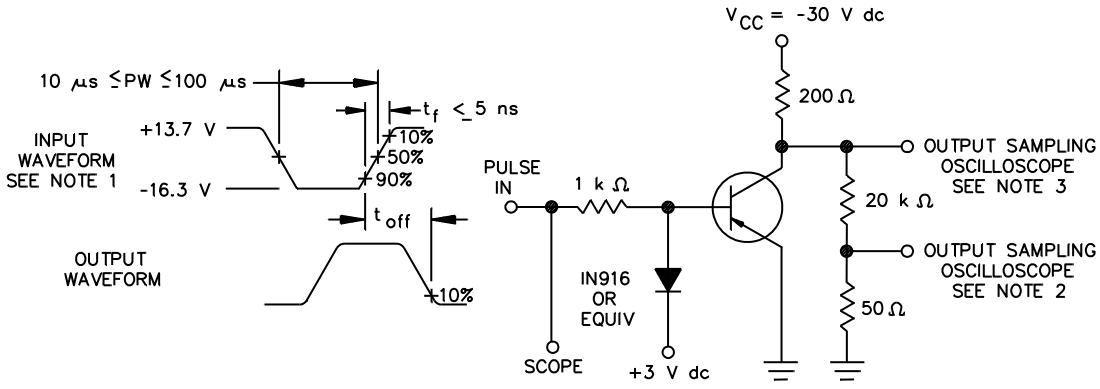

NOTES:

1. The rise time (t_r) of the applied pulse shall be ≤ 2.0 ns, duty cycle ≤ 2 percent and the generator source impedance shall be 50 ohms.
2. Sampling oscilloscope: Z_{in} ≥ 100 K ohms, C_{in} ≤ 12 pF, rise time ≤ 5 ns.
3. Alternate test point for high impedance attenuating probe.

FIGURE 17. Saturated turn-off switching time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete Part or Identifying Number (PIN), see 1.2.

e. For die acquisition, the letter version must be specified (see figures 5 and 6).

f. For acquisition of RHA designed devices, table II, subgroup 1 testing of group D is optional. If subgroup 1 testing is desired, it must be specified in the contract.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

6.4 Supersession information. Devices covered by this specification supersede the manufacturers' and users' Part or Identifying Number (PIN). The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification. This information in no way implies that manufacturers' PIN's are suitable as a substitute for the military PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.


6.5 Suppliers and PINs for JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example JANHCB2N2907A) will be identified on the QML.

Die ordering information (1) (2)		
PIN	Manufacturer	
	43611	34156
2N2906A 2N2907A	JANHCB2N2906A JANHCB2N2907A	JANHCD2N2906A JANHCD2N2907A


(1) For JANKC level, replace JANHC with JANKC.
(2) JANHCA, JANKCA, JANHCC, and JANKCC versions are obsolete.

* 6.6 PIN construction example.

* 6.6.1 Encapsulated devices The PINs for encapsulated devices are constructed using the following form.

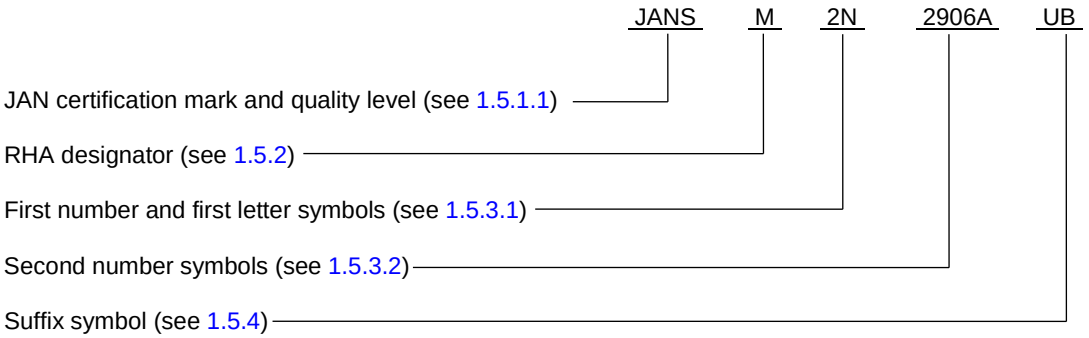

* 6.6.2 Unencapsulated devices. The PINs for un-encapsulated devices are constructed using the following form.

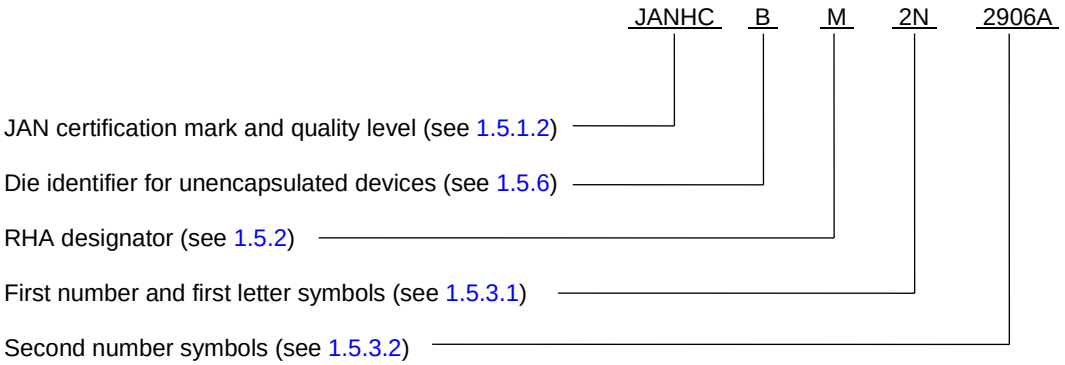

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

* 6.7 List of PINs.

* 6.7.1 PINs for encapsulated devices. The following is a list of possible PINs for encapsulated devices available on this specification sheet.

PINs for type 2N2906A and 2N2907A.			
JAN2N2906A	JANTX2N2906A	JANTXV2N2906A	JANS#2N2906A
JAN2N2906AL	JANTX2N2906AL	JANTXV2N2906AL	JANS#2N2906AL
JAN2N2907A	JANTX2N2907A	JANTXV2N2907A	JANS#2N2907A
JAN2N2907AL	JANTX2N2907AL	JANTXV2N2907AL	JANS#2N2907AL
JAN2N2906AUA	JANTX2N2906AUA	JANTXV2N2906AUA	JANS#2N2906AUA
JAN2N2907AUA	JANTX2N2907AUA	JANTXV2N2907AUA	JANS#2N2907AUA
JAN2N2906AUB	JANTX2N2906AUB	JANTXV2N2906AUB	JANS#2N2906AUB
JAN2N2906AUBC	JANTX2N2906AUBC	JANTXV2N2906AUBC	JANS#2N2906AUBC
JAN2N2907AUB	JANTX2N2907AUB	JANTXV2N2907AUB	JANS#2N2907AUB
JAN2N2907AUBC	JANTX2N2907AUBC	JANTXV2N2907AUBC	JANS#2N2907AUBC
JAN2N2906AUBN	JANTX2N2906AUBN	JANTXV2N2906AUBN	JANS#2N2906AUBN
JAN2N2906AUBCN	JANTX2N2906AUBCN	JANTXV2N2906AUBCN	JANS#2N2906AUBCN
JAN2N2907AUBN	JANTX2N2907AUBN	JANTXV2N2907AUBN	JANS#2N2907AUBN
JAN2N2907AUBCN	JANTX2N2907AUBCN	JANTXV2N2907AUBCN	JANS#2N2907AUBCN

* (1) The number sign (#) represent one of eight RHA designators available (M, D, P, L, R, F, G, or H). The PIN is also available without a RHA designator.

* 6.7.2 List of PINs for unencapsulated devices. The following is a list of possible PINs available on this specification sheet.

PINs for type 2N2906A and 2N2907A.	
JANHCB2N2906A	JANHCD2N2906A
JANKCB2N2907A	JANKCDX2N2907A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.

6.8 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, MC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5961-2016-038)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:07Z
Check the source to verify that this is the current version before use.