METRIC

FF-B-171/24

30 NOVEMBER 1993

FEDERAL SPECIFICATION SHEET

BEARING, BALL, ANNULAR, SINGLE ROW, ANGULAR CONTACT, COUNTERBORED OUTER RING, CONTACT ANGLE ABOVE 22° UP TO AND INCLUDING 32° , NON-SEPARABLE, ANSI/AFBMA DIMENSION SERIES 10.

The complete requirements for acquiring the bearings described herein shall consist of this document and the latest issue of **FF-B-171/GEN.**

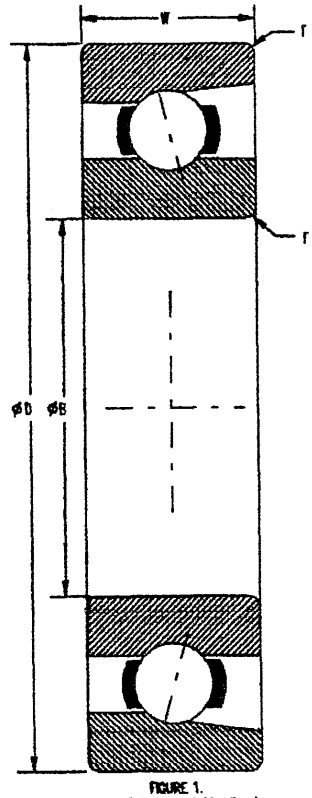


FIGURE 1.
OPEN (NO SHIELDS OR SEALS)
(CODE A)

BEARING CONFIGURATIONS

AMSC/NA

FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS :

1. Boundary dimensions. The boundary dimensions shall be specified in the part number by the size code in table I.

2. Cages. Cages shall be manufactured from any material unless otherwise specified. Cages shall be specified in the part number by the codes in table XI.

3. Shields and Seals All angular contact bearings with counterbored outer rings shall be open (no shields or seals, see figure 1) and designated by the the code "A" in the part number.


4. Radial Internal Clearance. The tolerance limits for radial internal clearance shall be in accordance with ANSI/AFBMA Standard 20 and shall be specified in the part number by the codes in table III.

5. Tolerance Class. The tolerance limits for tolerance class ABEC-1 and ABEC-5 shall be in accordance with ANSI/AFBMA Standard 20 and shall be specified in the part number by the codes in table III.

6. Preservative Compound. All bearings shall be supplied with preservative compound in accordance with MIL-P-197 and shall have a corresponding code "C" in the part number.

7. Part number. The part number consists of the letters FFB, the basic Federal specification number, the specification sheet number, and alpha or numeric codes for cage, size, shields and seals, radial internal clearance and tolerance class, and preservative compound.

EXAMPLE: FFB171/24 J 07 A 2 C

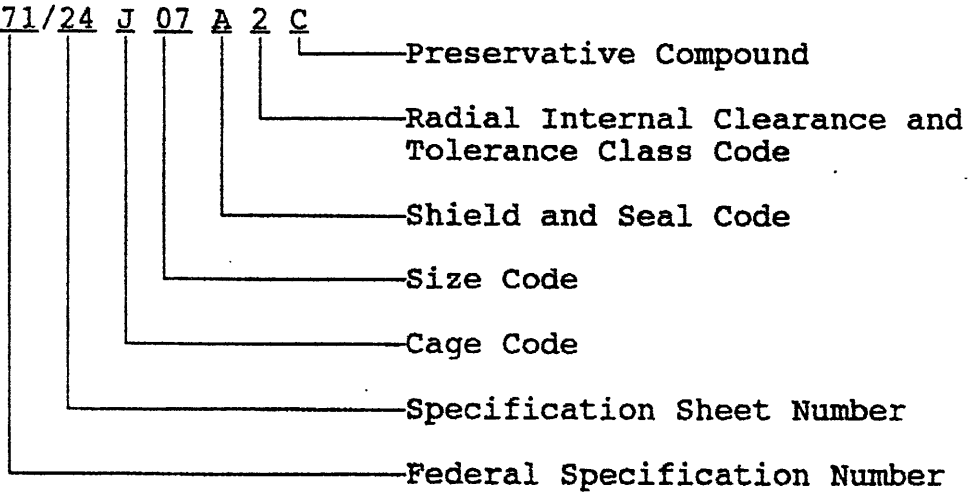

FFB171/24J07A2C indicates - Bearing, cage-pressed steel or molded plastic; bore 35mm; outside diameter 62mm; width 14mm; open (no shields or seals); radial internal clearance symbol 0 (normal): tolerance class ABEC-1; preservative compound in accordance with MIL-P-197.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:45Z
Check the source to verify that this is the current version before use.

TABLE I. Boundary dimensions.

Size Code 1/	OB Bore	OD Outside Diameter	W Width	Chamfer $r_s$min 2/	Shaft Shoulder Diameter Min 3/	C Dynamic Load Rating (Pounds)
00	10	26	8	0.3	12.5	755
01	12	28	8	0.3	14.5	820
02	15	32	9	0.3	17.5	880
03	17	35	10	0.3	19.5	1240
04	20	42	12	0.6	25	1575
05	25	47	12	0.6	30	1740
06	30	55	13	1.0	36	2240
07	35	62	14	1.0	41	2700
08	40	68	15	1.0	46	2780
09	45	75	16	1.0	51	3440
10	50	80	16	1.0	56	3530
11	55	90	18	1.1	62	4820
12	60	95	18	1.1	67	4940
13	65	100	18	1.1	72	5060
14	70	110	20	1.1	77	5970
15	75	115	20	1.1	82	6100
16	80	125	22	1.1	87	7850
17	85	130	22	1.1	92	8015
18	90	140	24	1.5	98.5	9705
19	95	145	24	1.5	103.5	11500
20	100	150	24	1.5	108.5	10135
21	105	160	26	2.0	115	12010
22	110	170	28	2.0	120	13940
24	120	180	28	2.0	130	14175
26	130	200	33	2.0	140	19435
28	140	210	33	2.0	150	19200
30	150	225	35	2.1	162	21960
32	160	240	38	2.1	172	24890
34	170	260	42	2.1	182	29825
36	180	280	46	2.1	192	33260
38	190	290	46	2.1	202	33960
40	200	310	51	2.1	234	38560

1/ Size codes in Table I are industry bore codes.
2/ The minimum bearing chamfer ($r_s$min) must clear the maximum shaft or housing fillet radius. This dimension does not control the shape of the 'bearing chamfer contour.
3/ For reference purposes only. Maximum shoulder heights shall be such as to permit bearing removal pressure to be applied to the bearing inner ring. In cases where this requirement cannot be met, provisions shall be made for the removal of the bearing from the shaft without damage to the bearing or other parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:45Z
Check the source to verify that this is the current version before use.

TABLE II. Codes for Cages.

Code	Cage
J	Pressed steel or molded plastic
M	Machined bronze or brass
T	Machined non-metallic (phenolic)
Y	Pressed brass

TABLE III. Codes for Radial Internal Clearance and ABEC tolerance.

Code	Radial Internal Clearance	Tolerance Class
1	Symbol 2 (Less than normal)	ABEC-1
2	Symbol 0 (Normal)	
3	Symbol 3 (Greater than normal)	
4	Symbol 4 (Greater than symbol 3)	
5	Symbol 2 (Less than normal)	ABEC-5
6	Symbol 0 (Normal)	
7	Symbol 3 (Greater than normal)	
8	Symbol 4 (Greater than symbol 3)	

CIVIL AGENCY COORDINATING ACTIVITIES:
GSA-FSS

PREPARING ACTIVITY:
DLA-IS

(Project 3110-0848-24)

Military Coordinating Activity:
DLA - IS

Custodians:
Army - AT
Air Force - 11

Review Activities:
Army - AR, EA, MI
Navy - OS

User Activity:
Army - GL, ME

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:45Z
Check the source to verify that this is the current version before use.