METRIC
FF-B-171/26
30 NOVEMBER 1993

FEDERAL SPECIFICATION SHEET

BEARING, BALL, ANNULAR: SINGLE ROW, ANGULAR CONTACT, COUNTERBORED OUTER RING, CONTACT ANGLE ABOVE 22° UP TO AND INCLUDING 32° , NON-SEPARABLE, ANSI/AFBMA DIMENSION SERIES 03.

The complete requirements for acquiring the bearings described herein shall consist of this document and the latest issue of FF-B-171/GEN.

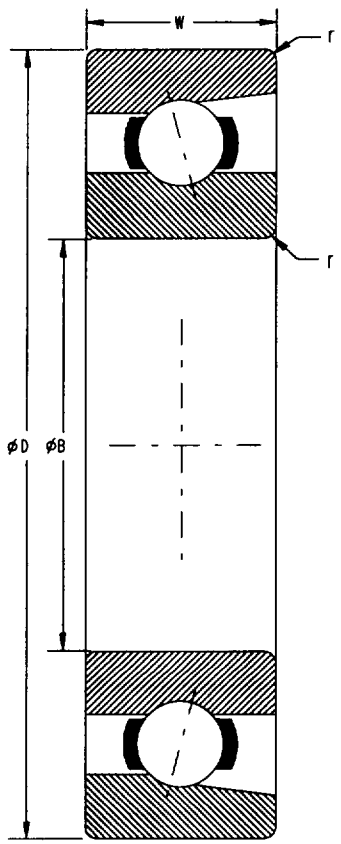


FIGURE 1.
OPEN (NO SHIELDS OR SEALS)
(CODE A)

BEARING CONFIGURATIONS

AMSC/NA FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:45Z
Check the source to verify that this is the current version before use.

TABLE I. Boundary dimensions.

Size Code 1/	OB Bore	OD Outside Diameter	W Width	Chamfer $r_s$min 2/	Shaft Shoulder Diameter Min 3/	C Dynamic Load Rating (Pounds)
00	10	35	11	0.6	15	1255
01	12	37	12	1.0	18	1375
02	15	42	13	1.0	21	1825
03	17	47	14	1.0	23	2210
04	20	52	15	1.1	27	3050
05	25	62	17	1.1	32	3470
06	30	72	19	1.1	37	4580
07	35	80	21	1.5	43.5	5830
08	40	90	23	1.5	48.5	7205
09	45	100	25	1.5	53.5	8710
10	50	110	27	2.0	60	12085
11	55	120	29	2.0	65	13960
12	60	130	31	2.1	72	15955
13	65	140	33	2.1	77	17680
14	70	150	35	2.1	82	18060
15	75	160	37	2.1	87	22480
16	80	170	39	2.1	92	23290
17	85	180	41	3.0	99	26510
18	90	190	43	3.0	104	27215
19	95	200	45	3.0	109	29240
20	100	215	47	3.0	114	31290
21	105	225	49	3.0	119	33395
22	110	240	50	3.0	124	37755
24	120	260	55	3.0	134	42230
26	130	280	58	4.0	148	46845
28	140	300	62	4.0	158	51590
30	150	320	65	4.0	168	56685
32	160	340	68	4.0	178	61870
34	170	360	72	4.0	188	64420
36	180	380	75	4.0	198	69795
38	190	400	78	5.0	212	75290
40	200	420	80	5.0	222	80905

1/ Size codes in Table I are industry bore codes.

2/ The minimum bearing chamfer ($r_s$min) must clear the maximum shaft or housing fillet radius. This dimension does not control the shape of the bearing chamfer contour.

3/ For reference purposes only. Maximum shoulder heights shall be such as to permit bearing removal pressure to be applied to the bearing inner ring. In cases where this requirement cannot be met, provisions shall be made for the removal of the bearing from the shaft without damage to the bearing or other parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:45Z
Check the source to verify that this is the current version before use.