
INCH-POUND

FF-B-187/10
10 SEPTEMBER 1993

BEARING, ROLLER, TAPERED, DOUBLE ROW, STRAIGHT BORE, TWO SINGLE CONES WITH CONTACTING FRONT FACES SLOTTED AND CHAMFERED FOR LUBRICATION, ONE DOUBLE CUP WITH LUBRICATION HOLES AND GROOVE.
(TYPE TNASW)

This specification is approved by the Administrator, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

The complete requirements for procuring the bearings described herein, shall consist of this document and the latest issue of FF-B-187/GEN.

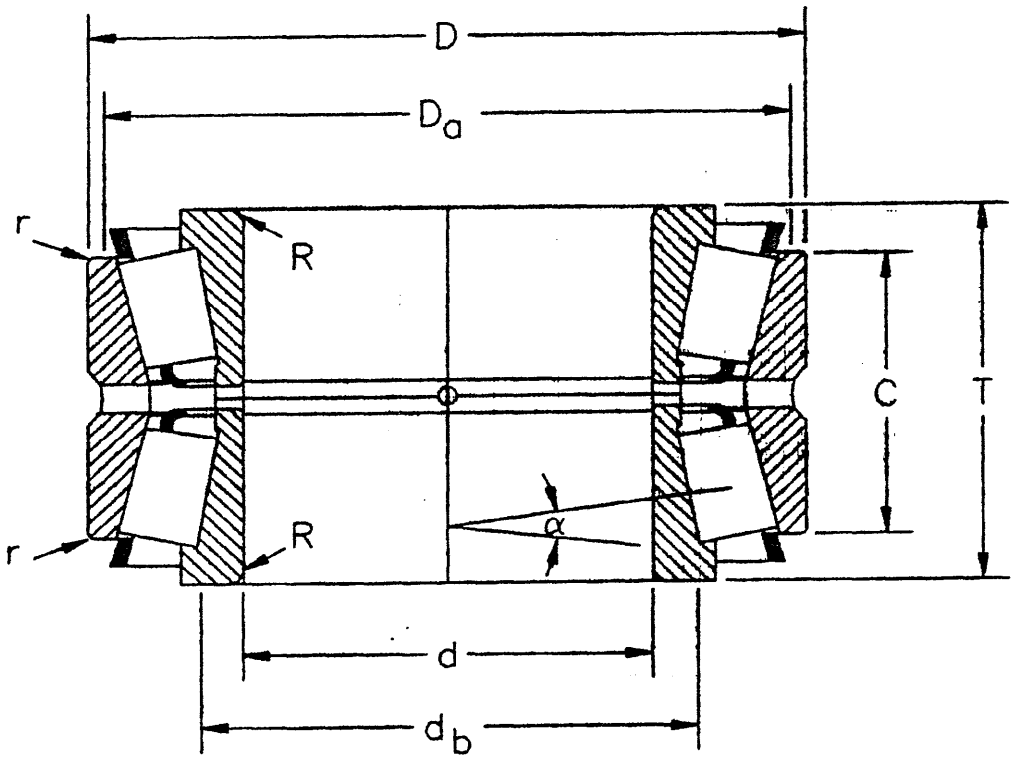

BEARING CONFIGURATION

AMSC N/A

FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	PART NUMBER 1/		d	D	T	C	R 2/	r 2/	db	Da	K FACTOR	BASIC DYNAMIC LOAD RATING (LBS)
	CONE	CUP	BORE	OUTSIDE DIA	OVERALL WIDTH	OVERALL CUP WIDTH	MAX SHAFT FILLET RAD	MAX HOUSING FILLET RAD	RECOMMENDED SHOULDER DIA			
									SHAFT	HOUSING		TWO ROW RADIAL
01	NA26118-SW	26284D	1.1806	2.8338	1.6835	1.4375	0.08	0.03	1.50	2.56	1.62	16300
02	NA3780-SW	37290	2.0000	3.0718	2.5625	2.0625	0.14	0.03	2.52	3.46	1.73	33700
03	NA455-SW	452D	2.0000	4.1500	2.5626	2.1250	0.14	0.03	2.56	3.94	1.74	37400
04	NA558-SW	552D	2.3750	4.8750	3.1250	2.5000	0.14	0.06	2.99	4.53	1.69	52600
05	NA643-SW	632D	2.7500	5.3750	3.7500	3.0000	0.14	0.06	3.39	4.92	1.61	64200
06	NA484-SW	472D	2.7559	4.7244	2.5626	2.1250	0.14	0.03	3.27	4.49	1.52	39600
07	NA759-SW	752D	3.5000	6.3750	4.1250	3.3750	0.14	0.06	4.17	5.91	1.71	89800
08	NA691-SW	672D	4.0000	6.6250	3.6250	2.7500	0.14	0.03	4.85	6.36	1.24	68200
09	NA67791-SW	67720CD	7.0000	9.7500	4.0625	3.3125	0.14	0.03	7.64	9.95	1.33	66800

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Cones, cups, and rollers: bearing quality - carburizing grade alloy or through-hardening grade alloy steel in accordance with ASTM-A295, ASTM-A534, or ASTM-A535. Cage: carbon steel (stamped). Powdered process steel may be used.

2. Hardness: Cones, cups and rollers: 58 to 64HRC.

3. Tolerances: Standard grade (AFBMA Class 4) (allowable tolerances are in 0.0001 inch).

Cone bore (d)			
Size range		Tolerance	
Over	Incl.	Plus	Minus
0 3.0000	3.0000 6.0000	5 10	0 0

Cup diameter (D)			
Size range		Tolerance	
Over	Incl.	Plus	Minus
0.0000 12.0000	12.0000 24.0000	10 20	0 0

Bearing width (C)			
Bore size range		Tolerance	
Over	Incl.	Plus	Minus
0 5.0000	5.0000 12.0000	100 300	0 0

Assembled bearing maximum radial runout		
Cup O.D. (D)		Tolerance
Over	Incl.	
0	24.0	20

4. Operating temperature: Recommended operating temperature not to exceed 230°F.

5. Lubrication: Bearings shall be furnished without lubrication. All bearings shall be preserved in accordance with MIL-P-197.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

6. Contact angle: All bearings are normal angle bearings having a contact angle (a) between 10 and 19 degrees. The contact angle is the angle between the line of action of the roller load and a plane perpendicular to the bearing axis.

7. Part number: The part number consists of the letter "F", the basic number of this specification sheet, followed by a dash number from Table I.

EXAMPLE: FFB87/10 - 18

Dash Number

Federal Specification Number

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

9. Referenced documents shall be of the issue in effect on the date of invitation for bids, or request for proposal.

NOTE: Inch units can be converted to soft metric units as follows: inch [x] 25.4 [=] millimeters.

MILITARY INTERESTS:

Military Coordinating Activity:
DLA - IS

Custodian:
Air Force - 11

Review Activities:
Army - AR, MI
Navy - OS
Air Force - 99

User Activities:
Army - GL, ME
Navy - MC, YD

CIVIL AGENCY COORDINATING ACTIVITIES:
GSA - FSS

PREPARING ACTIVITY:
DLA - IS

(Project 3110-0847-10)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.