FEDERAL SPECIFICATION SHEET

PIN, DRIVE, POWER ACTUATED, TYPE I - FOR USE WITH DIRECT-ACTING (GAS DRIVEN, NO PISTON) HIGH VELOCITY TOOLS CLASS 1 - FASTENER GUIDE BORE DIAMETER 0.251 -0.261 INCH

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the drive pins herein shall consist of this document and the latest issue of FF-P-395/GEN.

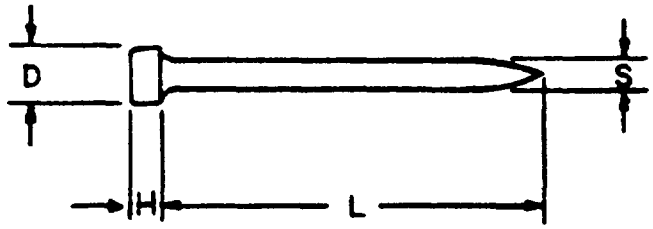


FIGURE 1

TABLE I
Style PC, direct-acting drive pin for concrete

DASH NUMBER	DIMENSIONS L 1/	S 2/	D, max.	H, min.
	Inch(es)	Inch	Inch	Inch
-1	1.219	0.155	0.250	0.109
-2	1.578	0.155	0.250	0.109
-3	2	0.155	0.250	0.109
-4	2.250	0.155	0.250	0.109
-5	2.50	0.155	0.250	0.109
-6	2.938	0.155	0.250	0.109
-7	3.938	0.155	0.250	0.109

1/ L dimension tolerance shall be ± 0.125 inch.
2/ S dimension tolerance shall be ± 0.010 inch.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

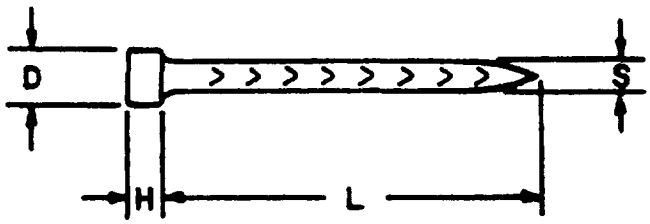


FIGURE 2

TABLE II
Style PS, direct-acting drive pin for steel

DASH NUMBER	DIMENSIONS			
	L 1/	S 2/	D, max.	H, min.
	Inch	Inch	Inch	Inch
-8	Ø.719	Ø.153	Ø.250	Ø.109

1/ L dimension tolerance shall be ± Ø.094 inch.
2/ S dimension tolerance shall be ± Ø.008 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

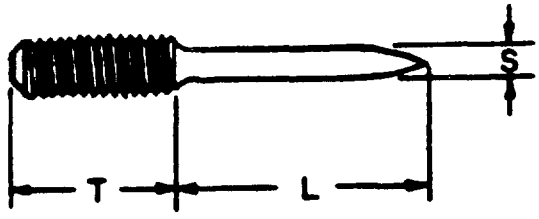


FIGURE 3

TABLE III
Style SC, direct-acting threaded stud for concrete

DASH NUMBER	DIMENSIONS		
	L 1/	T 2/4/	S 3/
	Inch(es)	Inch(es)	Inch
-9	1	Ø.688	Ø.160
-10	1.250	Ø.375	Ø.160
-11	1.250	Ø.500	Ø.160
-12	1.250	Ø.750	Ø.160
-13	1.250	1.Ø63	Ø.160
-14	1.250	1.250	Ø.160
-15	1.250	1.875	Ø.160

1/ L dimension tolerance shall be ± Ø.Ø63 inch.
2/ T dimension tolerance shall be ± Ø.125 inch.
3/ S dimension tolerance shall be ± Ø.Ø15 inch.
4/ Threads shall be Ø.250-2ØUNC-2A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

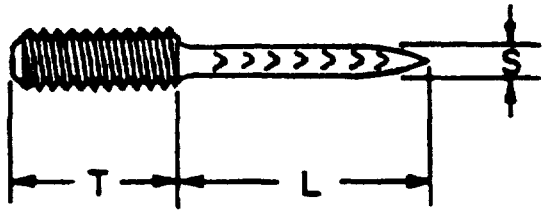


FIGURE 4

TABLE IV
Style SS, direct-acting threaded stud for steel

DASH NUMBER	DIMENSIONS L 1/	T 2/4/	S 3/
	Inch	Inch(es)	Inch
-16	0.688	0.375	0.155
-17	0.688	0.688	0.155
-18	0.688	1.125	0.155
-19	0.688	1.250	0.155

1/ L dimension tolerance shall be ± 0.078 inch.
2/ T dimension tolerance shall be ± 0.125 inch.
3/ S dimension tolerance shall be ± 0.010 inch.
4/ Threads shall be 0.250-20UNC-2A.

MILITARY INTERESTS:

Military Coordinating Activity:
Navy - YD

Custodians:
Navy - YD
Air Force - 99

Review Activities:
Air Force - 82
DLA- IS

User Activities:
Army - ME
Navy - CG

PREPARING ACTIVITY:

GSA - FSS

U.S. GOVERNMENT PRINTING OFFICE : 1989 - 240-963/96620

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.