FF-P-395/8
October 17, 1988

FEDERAL SPECIFICATION SHEET
PIN, DRIVE, HAND ACTUATED,
TYPE III - FOR USE WITH HAND DRIVEN TOOLS
CLASS 1 - FASTENER GUIDE BORE DIAMETER Ø.251 - Ø.261 INCH

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the drive pins herein shall consist of this document and the latest issue of FF-P-395/GEN.

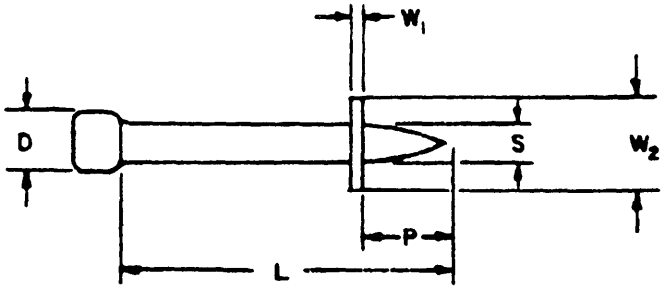


FIGURE 1

TABLE I
Style PC hand driven pin for concrete

DASH NUMBER	DIMENSIONS 4-6/		
	L 3/	S 1/	D 2/
	Inch(es)	Inch	Inch
-1	Ø.50	Ø.125	Ø.250
-2	Ø.750	Ø.125	Ø.250
-3	1	Ø.125	Ø.250
-4	1.250	Ø.141	Ø.250

1/ Tolerance on S dimension shall be + Ø.008 inch.
2/ Tolerance on D dimension be - Ø.020 inch.
3/ L dimension tolerance shall be ± Ø.063 inch.
4/ P dimension shall be Ø.375 inch. Tolerance on P dimension shall be + Ø.031 inch or - Ø.063 inch.
5/ W1 dimension, thickness of washer shall be Ø.040 to Ø.050 inch.
6/ W2 dimension, diameter of washer shall be Ø.375. Tolerance on the W2 dimension shall be + Ø.005 inch or - Ø.002 inch.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I (CONTINUED)
Style PC hand driven pin for concrete

DASH NUMBER	DIMENSIONS 4-6/		
	L 3/	S 1/	D 2/
	Inch(es)	Inch	Inch
-5	1.50	0.141	0.250
-6	2	0.141	0.250
-7	2.50	0.141	0.250
-8	3	0.141	0.250
-9	0.50	0.141	0.250
-10	0.750	0.141	0.250
-11	1	0.141	0.250
-12	1.250	0.156	0.250
-13	1.50	0.156	0.250
-14	2	0.156	0.250
-15	2.50	0.156	0.250
-16	3	0.156	0.250

1/ Tolerance on S dimension shall be ± 0.008 inch.
2/ Tolerance on D dimension be - 0.020 inch.
3/ L dimension tolerance shall be ± 0.063 inch.
4/ P dimension shall be 0.375 inch. Tolerance on P dimension shall be + 0.031 inch or - 0.063 inch.
5/ W1 dimension, thickness of washer shall be 0.040 to 0.050 inch.
6/ W2 dimension, diameter of washer shall be 0.375. Tolerance on the W2 dimension shall be + 0.005 inch or - 0.002 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

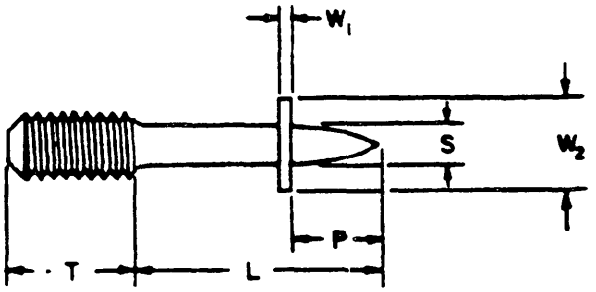


FIGURE 2

TABLE II
Style PS hand driven pin for steel

DASH NUMBER	DIMENSIONS 4-6/		
	L 3/	S 1/	D 2/
	Inch(es)	Inch	Inch
-17	Ø.5Ø	Ø.125	Ø.25Ø
-18	Ø.75Ø	Ø.125	Ø.25Ø
-19	1	Ø.125	Ø.25Ø
-2Ø	1.25Ø	Ø.141	Ø.25Ø
-21	1.5Ø	Ø.141	Ø.25Ø
-22	2	Ø.141	Ø.25Ø
-23	2.5Ø	Ø.141	Ø.25Ø
-24	3	Ø.141	Ø.25Ø
-25	Ø.5Ø	Ø.141	Ø.25Ø
-26	Ø.75Ø	Ø.141	Ø.25Ø
-27	1	Ø.141	Ø.25Ø
-28	1.25Ø	Ø.156	Ø.25Ø
-29	1.5Ø	Ø.156	Ø.25Ø
-3Ø	2	Ø.156	Ø.25Ø
-31	2.5Ø	Ø.156	Ø.25Ø
-32	3	Ø.156	Ø.25Ø

1/ Tolerance on S dimension shall be + Ø.ØØ8 inch.
2/ Tolerance on D dimension be - Ø.Ø2Ø inch.
3/ L dimension tolerance shall be ± Ø.Ø63 inch.
4/ P dimension shall be Ø.375 inch. Tolerance on P dimension shall be + Ø.Ø31 inch or - Ø.Ø63 inch.
5/ W1 dimension, thickness of washer shall be Ø.Ø4Ø to Ø.Ø5Ø inch.
6/ W2 dimension, diameter of washer shall be Ø.375. Tolerance on the W2 dimension shall be + Ø.ØØ5 inch or - Ø.ØØ2 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the currentversion before use.

MILITARY INTERESTS:

Military Coordinating Activity:
Navy - YD

Custodians:
Navy - YD
Air Force - 99

Review Activities:
Air Force - 82
DLA- IS

User Activities:
Army - ME
Navy - CG

PREPARING ACTIVITY:

GSA - FSS

U.S. GOVERNMENT PRINTING OFFICE : 1989 - 240-963/96619

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.