INCH-POUND

A-A-54809
12 February 1993

COMMERCIAL ITEM DESCRIPTION

PUNCH AND DISK, DENTAL RUBBER DAM

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-P-42051 which is cancelled.

This commercial item description covers a rubber dam punch and replacement disk suitable in rubber dams.

Salient characteristics:

Classification. The punch and disk shall be of the following types:

TYPE I: Rubber Dam Punch
TYPE II: Replacement Disk (with screw)

Material. The plunger spring shall be fabricated from austenitic stainless steel in accordance with ASTM Designation A313. The rest of the components shall be fabricated from stainless steel in accordance with ASTM Designation F899. For the alternate punch design, the hinge screw flat spring screw, disk screw and detent plug shall be fabricated from corrosion resistant steel.

Hardness. After proper heat treating, the Rockwell hardness of the following components of the rubber dam punch shall be:

Lever	C40-C46
Disk	C42-C46
Plunger	C58-C62
Plunger Screw	C38-C42
Flat Screw	C50-C55

AMSC N/A FSC 6520
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

For the alternate design, the following values for Rockwell hardness shall apply:

Disk, Fork, and Lever	C40-C47
Plunger	C50-C58
Flat Spring	C40-C50

The components that have been heat treated shall be tested for Rockwell hardness in accordance with ASTM E18 or E92 and E140.

Style, design and dimensions. Shall be an adjustable dental rubber punch and replacement disk (with screw) suitable for punching out round, clean-cut, tear-resistant holes in dental rubber dams. The Type I shall be furnished as a complete rubber dam punch. The Type II shall be a replacement disk with screw as a replacement for the rubber dam punch. The operation of the punch shall be smooth, without drag or binding. The design and dimensions shall be in accordance with Figure 1.

Cutting performance. The punch shall produce clean-cut holes in the rubber dam which do not have visually notched or ragged edges, even after 20,000 cuts for each hole size. The plugger shall be capable of punching holes 2 inches from the edge of the rubber dam without doubling or folding of the dam. The dam used shall be fabricated from natural rubber and shall be 0.007 to 0.009 inch thick.

Finish. The outer surfaces of the punch shall have a satin, mirror or polished finish, except where the disk is knurled. The operative surface of the disk shall be surface ground to produce cutting edges designed to meet the cutting performance requirements.

Corrosion resistance. All the components of the punch, except the disk and plunger, shall show no signs of corrosion when tested in accordance with ASTM F1089.

Passivation. The punch shall be properly passivated.

Identification marking. Each punch shall be permanently marked with the contractor's name or registered trademark and the word "stainless". Punches of foreign manufacture shall bear the name of the country of origin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

Workmanship. The cutting edges of each punch shall be properly sharpened and free from burrs or feathered edges. The punch and disk shall be free from defects which detract from their appearance or impair their serviceability.

Unit. Each (EA). One rubber punch with replacement disk with screw of the type specified, constitutes one unit.

QUALITY ASSURANCE PROVISIONS.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspection are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Examination. Examination shall be conducted to determine compliance with specification requirements.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 with an Acceptable Quality Level (AQL) of 2.5 (percent defective) and an inspection level of II, except for dimensions which shall be conducted at an inspection level of S-1 with an AQL of 1.0 (percent defective). Where feasible, the same sample shall be used for the determination of two or more inspection characteristics. The unit of product for examination purposes shall be one punch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for determination of two or more test characteristics.

Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 with an AQL of 1.0 (percent defective). Unit of product for test purposes shall be one punch.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerance specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements.

Federal Food, Drug, and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities and labeling and marking must be specified in the contract and/or order.

NOTE: The following National Stock Numbers and their respective Item Identifications are covered by this document:

NATIONAL STOCK NUMBERS	ITEM IDENTIFICATIONS
6520-01-052-6844	PUNCH, DENTAL, RUBBER DAM, ADJUSTABLE
6520-01-127-2205	DISK, PUNCH, DENTAL RUBBER DAM

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

Preparing Activity:

DoD-MB

Agent:


DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
USPHS
FDA-MPQAS

Project Number: 6520-2541
Location: c:\word\doc\levin\punchcid

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

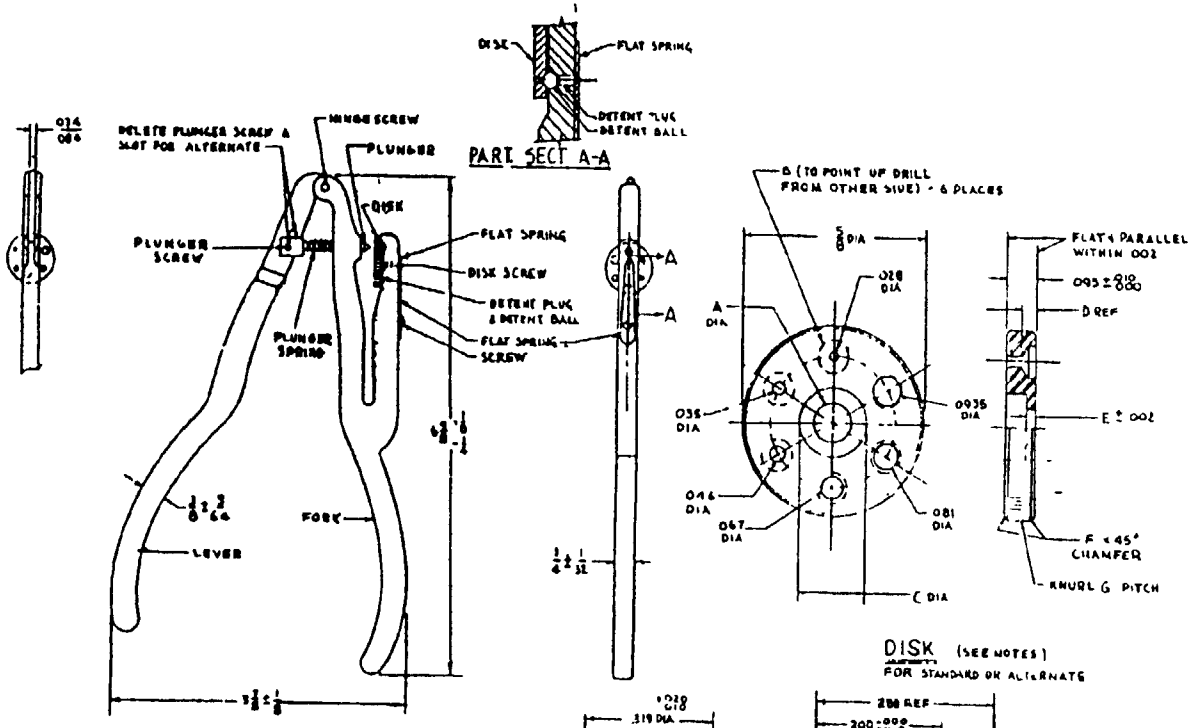

	A	B	C	D	E	F	G
STANDARD	.1406 ±.0010	.1015 DIA BY .050 DP	.230 .220	.050	.028 ±.002	.010	40
ALTERNATE	.1406 ± .0039	.094 DIA BY .059 DP	.244 .234	.059	.0433 +.0006 -.0040	.020	58

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACTIONS ± 1/64 DECIMALS ± ANGLES ±

NSN 6520-01-052-6844 PUNCH
NSN 6520-01-127-2205 DISK

A-A-54809

FIGURE 1 PUNCH AND DISK, DENTAL RUBBER DAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-54809	12 February 1993

3. DOCUMENT TITLE

PUNCH AND DISK, DENTAL RUBBER DAM

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

7. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-MSE	(1) Commercial (215)7372870	(2) AUTOVON 444-2870
c. ADDRESS (Include Zip Code) 2800 South 20th Street Philadelphia, PA 19145	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.