The documentation and process conversion measures necessary to comply with this amendment shall be completed by 21 June 1994

INCH-POUND

MIL-S-19500/430A
AMENDMENT 1
21 March 1994

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DUAL FIELD EFFECT TRANSISTORS, N-CHANNEL, SILICON
TYPES 2N5545, 2N5546, AND 2N5547, JAN, JANTX, AND JANTXV

This amendment forms a part of MIL-S-19500/430A, dated 3 September 1993, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1


Beneficial comments note, delete address and substitute the following: "Commander, Defense Electronics Supply Center, ATTN: DESC-ELDT, 1507 Wilmington Pike, Dayton, OH 45444-5765,".


PAGE 2

Figure 1, delete in its' entirety and substitute as follows:

"

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
ϕA	.209	.230	5.31	5.84	
ϕB	.178	.195	4.52	4.95	
C	.170	.210	4.32	5.33	
D	.500	.750	12.70	19.05	
E		.021		.53	3
F	.016	.019	.41	.48	4
J	.028	.048	.71	1.22	7
K	.036	.046	0.91	1.17	
L		.020		.51	
N	.0354 Nom.		.90 Nom.		5
P	.0146 Nom.		.037 Nom.		5

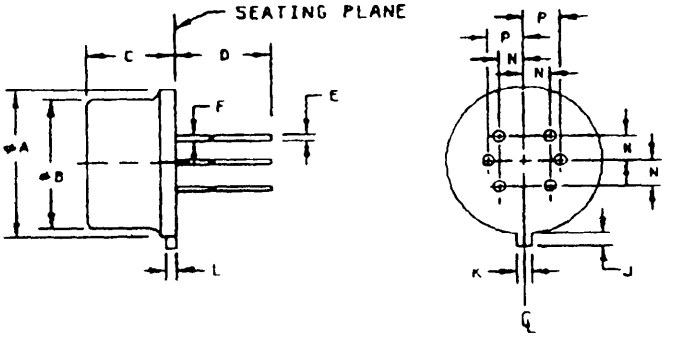

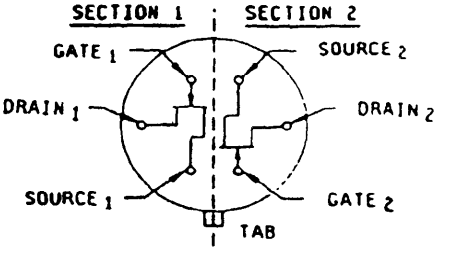

CONNECTION DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Measured in the zone beyond .250 inch (6.35 mm) from the seating plane.
4. Measured in the zone from .50 inch (1.27 mm) to .250 inch (6.35 mm) from the seating plane.
5. When measured in a gauging plane .054 +.001, -.000 inch (1.37 -0.03, -0.00 mm) below the seating plane of the transistor, maximum diameter leads shall be within .007 inch (0.18 mm) of their true location relative to a maximum width tab. Smaller diameter leads shall fall within the outline of the maximum diameter lead tolerance.
6. All leads electrically insulated from case and each section electrically isolated from the other.
7. Measured from the maximum diameter of the actual device.

FIGURE 1. Physical dimensions (TO-71)."

AMSC N/A
FSC 5961

Distribution statement A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-19T01:46Z
Check the source to verify that this is the currenversion before use.

PAGE 5

4.3, Screen 13, delete "±10" and substitute "100".

PAGE 7

TABLE I, subgroup 2, gate - source cutoff voltage, conditions column, delete "V_{GS} = 15 V dc" and substitute "V_{DS} = 15 V dc".

PAGE 8

TABLE I, conditions column, delete "V_{GS} = 15 V dc; V_{DS} = 0; f = 1 kHz" (three occurrences) and substitute "V_{DS} = 15 V dc; V_{GS} = 0; f = 1 kHz;"; subgroup 3, gate current differential, limits max column, delete "-5" and substitute "5".

PAGE 9

TABLE I, subgroup 4, Small signal common-source, short circuit, input capacitance test, and the Small signal common-source, short-circuit, reverse transfer capacitance test, conditions column, delete conditions in their entirety and substitute "V_{DS} = 15 V dc, V_{GS} = 0, 100 kHz ≤ f ≤ 1 MHz" (for both tests); Spot noise figure test and equivalent input noise voltage test, conditions column, delete "V_{GS} = 15 V dc" and substitute "V_{DG} = 15 V dc", delete "1 Hz" and substitute "5 Hz" (for both tests); equivalent input noise voltage, limits column, delete "5.0" and substitute "200"; Sugroup 7, Magnitude of small-signal, common-source short-circuit forward transfer admittance, delete "V_{GS} = 15 V dc" and substitute "V_{DS} = 15 V dc", delete "V_{DS} = 0 V" and substitute "V_{GS} = 0 V".

PAGE 10

TABLE II, title, delete "C, and E" and substitute "and C"; conditions column, delete "V_{GS} = 15 V dc; V_{DS} = 0; f = 1 kHz" (two occurances) and substitute "V_{DS} = 15 V dc; V_{GS} = 0; f = 1 kHz;".

CONCLUDING MATERIAL

Custodians:
Army - ER
Air Force - 17

Review activities:
Army - MI
Air Force - 19, 85, 99

Preparing activity:
DLA - ES

Agent:
DLA - ES

(Project 5961-1635)

Source: https://assist.dla.mil -- Downloaded: 202610-19T01:46Z
Check the source to verify that this is the current version before use.