The documentation and process conversion measures necessary to comply with this amendment shall be completed by 23 May 95

MIL-S-19500/434B
AMENDMENT 2
23 November 1994
SUPERSEDING
AMENDMENT 1
26 March 1993

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, TRANSIENT VOLTAGE SUPPRESSOR
TYPES 1N5610 THROUGH 1N5613
JAN, JANTX, JANTXV, AND JANS

This amendment forms a part of MIL-S-19500/434B, dated 17 November 1992, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 3

* 4.3, screening table, step 13, both measurement levels, second line, after "subgroup 2", add " and 3".

PAGE 4

4.4.3.1c, delete last sentence entirely.

PAGE 5

TABLE I, subgroup 2, inspection column, delete "Reverse current" and substitute "Standby current". In the symbol column, delete "I_R" and substitute "I_D".

PAGE 6

TABLE II, step 1, inspection column, delete "Reverse current" and substitute "Standby current". In the symbol column, delete "I_R" and substitute "I_D".

---

* The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Pages replaced
7	Reprinted without change
8	8

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17
NASA - NA

Review activities
Army - AR, MI, [illegible]
Navy - AS, CG, MC
Air Force - [illegible]

Preparing activity:
DLA - ES

(Project 5961-1722)


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T01:49Z
Check the source to verify that this is the current version before use.

TABLE III. Characteristics and ratings.

Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7		Col 8	Col 9	Col 10
Type	Breakdown voltage $V_{(BR)}$ at $I_{(BR)}$ Min	Test current $I_{(BR)}$ $t_p \leq$ 300 ms cycle ≤ 2 percent	Working peak reverse voltage V_{WM}	Maximum reverse current I_R at V_{WM}	Maximum clamping voltage V_C at I_{PP} for t_p = 1 ms	Maximum peak pulse current (I_{PP}) t_p = 20 μs t_r = 8 μs	Maximum peak pulse current (I_{PP}) t_p = 1 ms t_r = 10 μs	Maximum temperature coefficient of $V_{(BR)}$ $\alpha V_{(BR)}$	Minimum breakdown voltage at $I_{(BR)}$ T_A = -55°C	Breakdown current $I_{(BR)}$ maximum dc current T_A = +25°C
	V dc	mA dc	V (pk)	μA dc	V (pk)	A (pk)	A (pk)	α/°C	V dc	mA dc
1N5610	33.0	1	30.5	5	47.6	193	32.0	.093	30.2	75.0
1N5611	43.7	1	40.3	5	63.5	136	24.0	.094	40.0	53.0
1N5612	54.0	1	49.0	5	78.5	116	19.0	.096	48.5	43.0
1N5613	191.0	1	175.0	5	265.0	33	5.7	.100	172.0	12.5

Source: https://assist.dla.mil -- Downloaded: 202610-19T01:49Z
Check the source to verify that this is the current version before use.

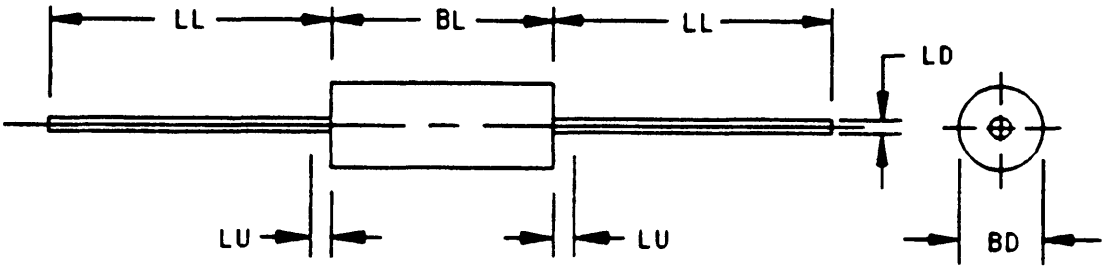

Symbol	Dimensions				Notes
	Millimeters		Inches		
	Min	Max	Min	Max	
BD	3.30	4.70	.150	.185	3
LD	0.94	1.07	.037	.042	
BL	4.06	9.53	.160	.375	3
LL	22.86	33.02	.900	1.300	
LU		1.27		.050	4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Package contour optional within BD and length BL. Heat slugs, if any, shall be included within this cylinder but shall not be subject to minimum limit of BD.
4. Within this zone lead, diameter may vary to allow for lead finishes and irregularities other than heat slugs.
5. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions, type 1N5610 through 1N5613.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:49Z
Check the source to verify that this is the current version before use.