INCH–POUND

The documentation and process conversion measures necessary to comply with this document shall be completed by 15 January 2014.

MIL–PRF–19500/649B
19 JULY 2013
SUPERSEDING
MIL–PRF–19500/649A
16 August 1998

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON,
POWER RECTIFIER, SCHOTTKY
TYPE 1N6781, JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL–PRF–19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, Schottky power rectifier diodes. Four levels of product assurance are provided for each device type as specified in MIL–PRF–19500.

1.2 Physical dimensions. The device package style is modified TO–257AA (two pin, isolated) in accordance with figure 1.

1.3 Maximum ratings. Unless otherwise specified, T_C = +25°C.

Type	V_{RRM} = V_{RWM}	I_O T_J = T_C = 100°C	I_{FSM} T_C =+100°C t_p = 8.3 ms	$R_{\theta JC}$	$R_{\theta JA}$	T_{STG} and T_{OP}
	V (pk) dc	A dc	A (pk)	°C/W	°C/W	°C
1N6781	60	15	120	2.5	45	–65 to +150


(1) Derate at 300mA/°C above T_C = +100°C.

1.4 Primary electrical characteristics. Unless otherwise specified, T_C =+25°C.

Type	V_{F1} I_F = 5 A dc	V_{FS} I_F = 15 A dc	I_{R1} V_R =0.8 V_{RWM} (see 1.3)	I_{R1} V_R =0.8 V_{RWM} T_C =+125°C (see 1.3)	C_J V_R =5 V f = 1 MHz
	V dc	V dc	mA dc	mA dc	pF
1N6781	60	15	120	2.5	45

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218–3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

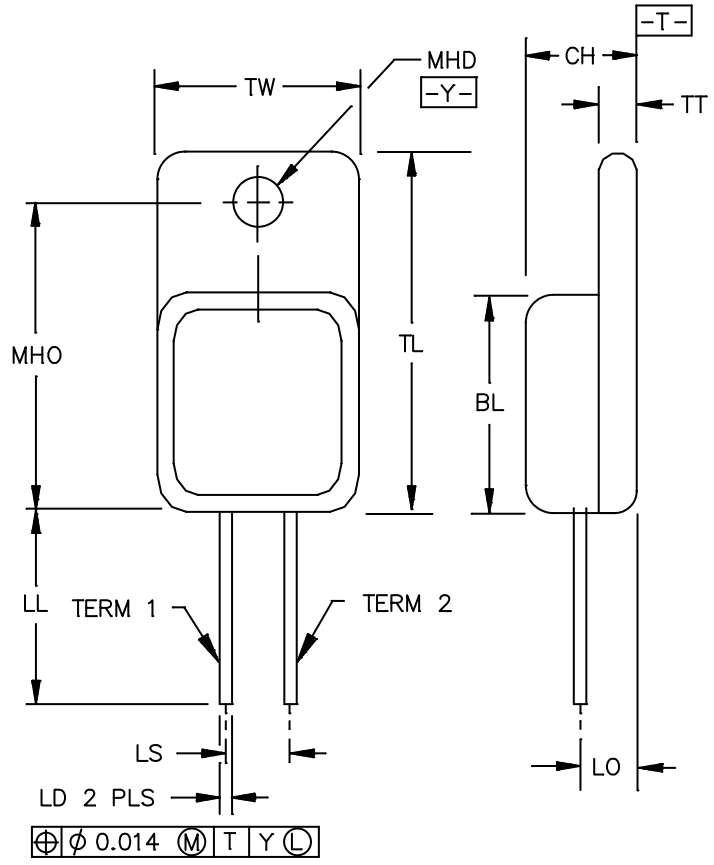




FIGURE 1. Physical dimensions (modified TO–257AA, 2 pin, isolated).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BL	.410	.430	10.4	10.9	
CH	.249	.260	6.32	6.60	
LD	.035	.045	0.89	1.14	
LL	.500	.750	12.70	19.95	
LO	.150 typical		3.81		
LS	.200 bsc		5.08		
MHD	.140	.150	3.55	3.80	
MHO	.527	.537	13.4	13.6	
TL	.645	.665	16.4	16.9	
TT	.040	.050	1.02	1.27	
TW	.410	.420	10.4	10.7	

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Terminal 1 is the cathode and terminal 2 is the anode.
3. All terminals are isolated from case.
4. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions (TO–257AA, 2 pin, isolated) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL–PRF–19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL–STD–750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at http://quicksearch.dla.mil or https://assist.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL–PRF–19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL–PRF–19500.

3.4 Interface and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL–PRF–19500 and on figure 1 (a modified two pin version of TO–257AA) herein.

3.4.1 Lead finish. Unless otherwise specified, the lead finish shall be solderable in accordance with MIL–STD–750, MIL–PRF–19500, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Lead formation. When lead formation is performed, as a minimum, the vendor shall perform 100 percent hermetic seal in accordance with screen 14 of E–IV of MIL–PRF–19500 and 100 percent DC testing in accordance with table I, subgroup 2 herein.

3.4.3 Lead isolation. Methods used for electrical isolation of the terminal feedthroughs shall employ materials that contain a minimum of 90 percent Al2O3(ceramic). Examples of such construction techniques are metallized ceramic eyelets or ceramic walled packages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

3.4.4 Polarity. The identification of terminals of the device package shall be as shown on figure 1. Terminal 1 shall be connected to the cathode and terminal 2 shall be connected to the anode.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.7 Marking. Marking shall be in accordance with MIL–PRF–19500.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL–PRF–19500, and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (quality levels JANS, JANTX and JANTXV only). Screening shall be in accordance with table E–IV of MIL–PRF–19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table E–IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
3c (1)	Thermal impedance (see 4.3.2)	Thermal impedance (see 4.3.2)
9 and 10	Not applicable	Not applicable
11	I_{R1} and V_{F2}	I_{R1} and V_{F2}
12	See 4.3.1, t = 240 hours	See 4.3.1, t = 48 hours
13	See subgroups 2 and 3 of table I herein; I_{R1} and V_{F2}; ΔI_{R1} ≤ 100 percent of initial value or ±75 μA dc, whichever is greater; ΔV_{F2} ≤ ±50 mV.	See subgroups 2 of table I herein; I_{R1} and V_{F2}; ΔI_{R1} ≤ 100 percent of initial value or ±75 μA dc, whichever is greater; ΔV_{F2} ≤ ±50 mV.

(1) Thermal impedance shall be performed any time after temperature cycling (screen 3a). Quality levels JANTX and JANTXV do not need to be repeated in screening requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

4.3.1 Power burn-in conditions. The power burn-in conditions shall be as follows:

Test method 1038 of MIL–STD–750, test condition A; T_C = +125°C minimum; V_R = 48 V dc.

4.3.2 Thermal impedance ($Z_{\theta JX}$) measurements for screening. The thermal impedance measurements shall be performed in accordance with test method 3101 of MIL–STD–750 using the guidelines in that test method for determining I_H, I_M, t_H, t_{SW} (V_C and V_H where appropriate). Measurement delay time (t_{MD}) = 70 μs maximum. The thermal impedance limit used in screen 3c and table I, subgroup 2 herein shall be set statistically by the supplier. See table II, subgroup 4 (group E) herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL–PRF–19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E–V of MIL–PRF–19500 and table I herein. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the test methods and conditions specified for subgroup testing in table E–VIA (JANS) and table E–VIB (JANTX and JANTXV) of MIL–PRF–19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps and footnotes of 4.6 herein.

4.4.2.1 Quality level JANS (table E–VIA of MIL–PRF–19500).

Subgroup	Method	Condition
B4	1037	I_F or I_O = 2A (minimum); ΔT_J = +85°C, minimum.
B5	1038	Test condition A, $T_J = T_C$ = +150°C, V_R = 48V dc.
B6	3101	Limit for thermal resistance is $R_{\theta JC}$ = 2.5°C/W.

4.2.2 Quality levels JANTX and JANTXV (table E–VIB of MIL–PRF–19500).

Subgroup	Method	Condition
B3	1037	I_F or I_O = 2A (minimum); ΔT_J = +85°C, minimum.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E–VII of MIL–PRF–19500 and as follows herein. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable step and footnotes of 4.6 herein.

Subgroup	Method	Condition
C2	2036	Test condition A, weight = 5 pounds ±10 ounce (2.25Kg ±0.28Kg), t = 15 s ±3 s.
C2	2006	X1, Y1, Z1, and Z2 axis.
C5	3101	See 4.5.2.
C6	1037	I_F or I_O = 2A (minimum); ΔT_J = +85°C, minimum.
C6	1038	JANS only; test condition A, 1000 hours, $T_J = T_C$ = +150°C, V_R = 48V dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in appendix E, table E–IX of MIL–PRF–19500 and as specified in table II herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta requirements shall be in accordance with the applicable steps and footnotes of 4.6 herein.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse response measurements. The conditions for the pulse response measurement shall be as specified in section 4 of MIL–STD–750.

4.5.2 Thermal resistance ($R_{\theta JC}$). Thermal resistance measurements shall be performed in accordance with test method 3101 of MIL–STD–750. The maximum limits for $R_{\theta JC(max)}$ shall be 2.5°C/W for devices in the 2 pin case style. The following parameter measurements shall apply:

a. I_H forward heating current ---------- 9.9 A

b. I_M measure current ---------- 15 mA

c. t_H heating time ---------- Steady state (see MIL–STD–750, method 3101)

d. t_{MD} measurement delay time ---------- 35 ms

e. V_H heating voltage ---------- 1 V

4.5.3 Thermal impedance ($Z_{\theta JX}$).

4.5.3.1 Measurements for initial qualification or requalification. The thermal impedance measurements shall be performed in accordance with test method 3101 of MIL–STD–750. Read and record data for thermal impedance derived conditions limits and thermal response curve shall be supplied to the qualifying activity on the qualification lot prior to qualification approval.

4.5.3.2 Measurements for group A. The thermal impedance measurements shall be performed in accordance with test method 3101 of MIL–STD–750. The following test conditions shall be used for thermal impedance, group A inspection:

a. I_H forward heating current ---------- 9.9 A

b. I_M measure current ---------- 15 mA

c. t_H heating time ---------- 200 ms

d. t_{MD} measurement delay time ---------- 35 ms

e. V_H heating voltage ---------- 1 V

The maximum limit for thermal impedance under these conditions are $Z_{\theta JX(max)}$ = 2.4°C/W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

4.6 Electrical and delta measurements. The values for the electrical and delta measurements for groups A, B, C, and E shall be as specified below. (1) (2) (3)

Step	Inspection	MIL–STD–750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1	Forward voltage	4011	I_F = 10 A dc pulsed	V_{F2}		0.81	V dc
2	Reverse leakage current	4016	V_R = 48 V dc pulsed DC method	I_{R1}		0.30	mA dc
3	Forward voltage	4011	I_F = 10 A dc pulsed	ΔV_{F2}		±50 mV dc from initial reading	
4	Reverse leakage current	4016	V_R = 48 V dc pulsed DC method	ΔI_{R1}		100 percent of initial value or ±75 µA dc whichever is greater	
5	Thermal impedance	3101	See 4.5.3	$Z_{\theta JX}$		2.40	°C/W

(1) The electrical measurements for group B, quality level JANS shall be as follows:
   a. In addition to the measurements specified for subgroup 3 of table E–VIA of MIL–PRF–19500, the measurements of steps 1 and 2 shall also be taken.
   b. In addition to the measurements specified for subgroup 4 of table E–VIA of MIL–PRF–19500, the measurements of steps 1, 2, 3, 4, and 5 also be taken.
   c. In addition to the measurements specified for subgroup 5 of table E–VIA of MIL–PRF–19500, the measurements of steps 1, 2, 3, and 4 also be taken.

(2) The electrical measurements for group B, quality level JANTX and JANTXV shall be as follows:
   a. In addition to the measurements specified for subgroup 2 of table E–VIB of MIL–PRF–19500, the measurements of steps 1 and 2 shall also be taken.
   b. In addition to the measurements specified for subgroup 3 of table E–VIB of MIL–PRF–19500, the measurements of steps 1, 2, and 5 also be taken.
   c. In addition to the measurements specified for subgroup 5 of table E–VIB of MIL–PRF–19500, the measurements of steps 1 and 2 also be taken.

(3) The electrical measurements for group C, all quality levels, shall be as follows:
   a. In addition to the measurements specified for subgroups 2 and 3 of table E–VII of MIL–PRF–19500, the measurements of step 1 shall also be taken.
   b. In addition to the measurements specified for subgroup 6 of table E–VII of MIL–PRF–19500, the measurements of step 1 shall also be taken.

(4) The electrical measurements for group E, all quality levels, shall be as follows: In addition to the measurements specified for subgroups 1 and 2 of table E–IX of MIL–PRF–19500, the measurements of steps 1 and 2 shall also be taken.

(5) Devices which exceed the table I (group A) limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL–STD–750		Symbol	Limit		Unit
	Method	Conditions		Max	Min	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3101	See 4.5.3.2	$Z_{\theta JX}$		2.40	°C/W
Forward voltage	4011	Pulsed test 3/				
		I_F = 5 A dc	V_{F1}		0.70	V dc
		I_F = 10 A dc	V_{F2}		0.81	V dc
		I_F = 15 A dc	V_{F3}		0.88	V dc
Reverse leakage current	4016	DC method; pulsed test 3/ V_R = 48 V (pk)	I_{R1}		0.30	mA dc
Subgroup 3						
High temperature operation:		T_C = +125°C				
Reverse leakage current	4016	DC method pulsed 3/ V_R = 48 V (pk)	I_{R2}		300	mA dc
Low temperature operation:		T_C = –55°C				
Forward voltage	4011	Pulsed test 3/ I_F = 15 A dc	V_{F4}		0.98	V dc
Subgroup 4						
Junction capacitance	4001	V_R = 5 V dc, f = 1.0 MHz	C_J		900	pF
Subgroup 5 and 7						
Not applicable						
Subgroup 6						
Surge current	4066	Condition A1; T_A = +25°C, I_{FSM} = 120 A(pk), V_{RM} = 60 V(pk), I_O = 0 A(pk), 6 surges of 8.3 ms each at 1 minute intervals				
Electrical measurements		See 4.6, steps 1 and 2				

1/ For sampling plans not specified, see MIL–PRF–19500.
2/ If 4.5.3.2 test conditions are performed in 100 percent screening, this test need not be performed in group A.
3/ Pulse response test (see 4.5.1): Pulse width = 300 ms, duty cycle ≤ 2 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) – for qualification and re-qualification only.

Inspection	MIL–STD–750		Qualification sample plan
	Method	Conditions	
Subgroup 1			45 devices
Temperature cycling (air to air)	1051		c = 0
Hermetic seal Fine leak Gross leak	1071		
Electrical measurements		See 4.6 herein, steps 1 and 2.	
Subgroup 2			45 devices c = 0
Burn-in (for diodes, rectifiers, and zeners) (DC HTRB)	1038	Test condition A, t = 1,000 hours.	
Blocking life	1048	T_C = +125°C; V_R = 48 Vdc; t = 1,000 hours.	
Electrical measurements		See 4.6 herein, steps 1 and 2.	
Subgroup 3			
Not applicable			
Subgroup 4			Sample size N/A
Thermal impedance and thermal response testing of diodes	3101	$R_{\theta JC}$ = 2.5 C/W. See 4.5.2 and MIL–PRF–19500.	
Subgroup 5			
Not applicable			

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL–PRF–19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete Part or Identifying Number (PIN), see title and section 1.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

6.4 Cross reference list. Parts covered by this specification may be used to replace the following commercial Part of Identifying Numbers (PIN):

Preferred types	Commercial types
JAN1N6781, JANTX1N6781, JANTXV1N6781, JANS1N6781	1N6781

6.5 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review activities:
Air Force – 99

Preparing activity:
DLA – CC

(Project 5961–2013–034)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:29Z
Check the source to verify that this is the current version before use.