INCH-POUND

A-A-52448
May 7, 1993
SUPERSEDING
MS500046B
16 February 1988

COMMERCIAL ITEM DESCRIPTION

COCK, PLUG: AIR SUPPLY, VEHICULAR, AIR BRAKE SYSTEM

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for MS500046B, which is canceled.

ABSTRACT

This CID covers one type of plug cock, which is used in the vehicular air brake system.

SALIENT CHARACTERISTICS

a. Materials. Unless otherwise specified herein, the materials used shall be in accordance with the manufacturer's material specifications for plug cocks. The use of recovered material made in compliance with regulatory requirements is acceptable provided all the requirements of this CID are met (see note d).

1. Body and plug. The body and plug shall be made from copper alloy, brass forging, or copper alloy calling material. Forging hardness shall be in accordance with the manufacturer’s specifications/drawings. Casting condition shall be as cast.

2. Fittings and hardware. Fittings and hardware shall be zinc plated in accordance with ASTM B633-85, Type Class SC3 (FE/Zn13).

b. Design and construction. Unless otherwise specified in figure 1, the plug cock shall be designed and constructed in accordance with the manufacturer's specifications/drawings.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000.

AMSC N/A FSC 2530

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.

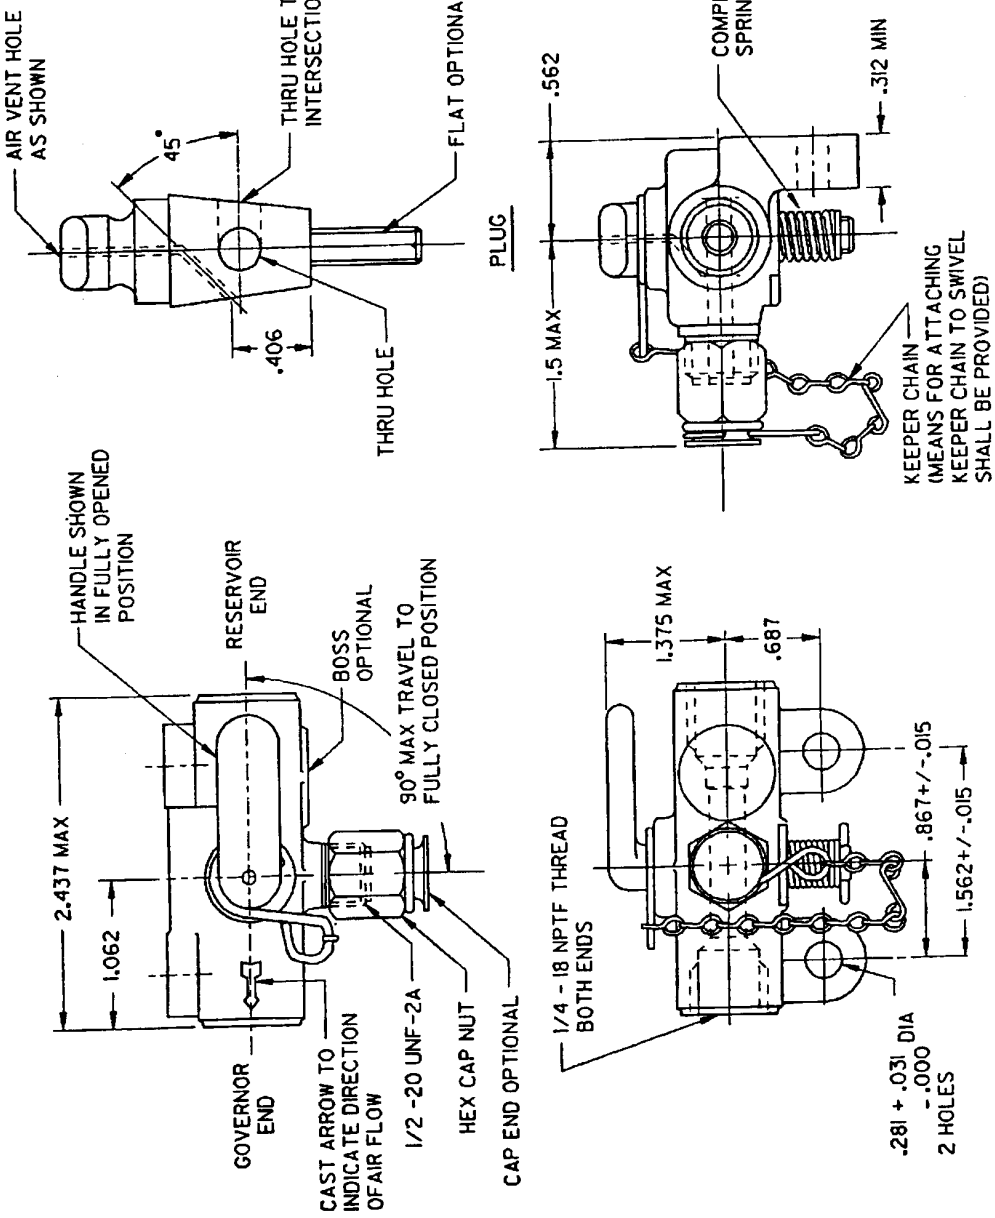

PIN no. A52448-1	Former MS part no. MS500046-1	Former part no. 7533853

NOTES: a. Plug cock shall be free of sharp edges and burrs.
b. Unless otherwise specified, dimensions are in inches and tolerances are: ± .030.

FIGURE 1. Cock, plug: air supply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.

c. Performance. Leakage shall be no more than a 1/2 inch bubble in five seconds at 100 pounds per square inch (psi) pressure with the handle in the fully opened position (see figure 1) and with air vent at top plugged.

d. Identification markings. Identification markings shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE) and part number, and the part identification number (PIN) A52448-1.

QUALITY ASSURANCE PROVISIONS

a. Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

b. Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING

Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract or order (see note b).

NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

a. Addresses for obtaining copies of referenced documents. Copies of ASTM B633-85 "Standard Specification for Electroplated Coatings Of Zinc on Iron and Steel", can be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.

b. Ordering data. Acquisition documents must specify the following:

1. Title, number, and date of this CID.
2. Issue of the DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
3. PIN number and quantity of plug cocks required.
4. Selection of applicable level and packaging requirements.

c. Cross-reference data. Plug cocks conforming to this CID are interchangeable/substitutable with plug cocks conforming to MS500046B, dated 16 February 1988.

d. Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

e. Metric products. Metric cock plugs will be considered on the following basis:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.

1. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of ASTM E380, and all other requirements of this CID are met.

2. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

3. The contracting officer has the option of accepting or rejecting the product.

MILITARY INTERESTS:

Custodians
Army – AT
Air Force – 99

Review Activity:
DLA - CS

User Activity:
Navy - MC

CIVIL AGENCY COORDINATING AVTIVITY:
GSA - FSS

PREPARING ACTIVITY:
Army - AT

(Project 2530-0346)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.