INCH-POUND
A-A-52448A
April 14, 2010
SUPERSEDING
A-A-52448
7 May 1993

COMMERCIAL ITEM DESCRIPTION

COCK, PLUG: AIR SUPPLY, VEHICULAR, AIR BRAKE SYSTEM

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for MS500046B for all federal agencies.

1. SCOPE. This CID covers one type of plug cock, which is used in the vehicular air brake system.

2. SALIENT CHARACTERISTICS

2.1 Materials. Unless otherwise specified herein, the materials used shall be in accordance with the manufacturer's material specifications for plug cocks. The use of recovered material made in compliance with regulatory requirements is acceptable provided all the requirements of this CID are met (see note d).

2.1.1 Body and plug. The body and plug shall be made from copper alloy, brass forging, or copper alloy calling material. Forging hardness shall be in accordance with the manufacturer's specifications/drawings. Casting condition shall be as cast.


2.1.2 Fittings and hardware. Fittings and hardware shall be zinc plated in accordance with ASTM B633-85, Type Class SC3 (FE/Zn13).

2.2 Design and construction. Unless otherwise specified in figure 1, the plug cock shall be designed and constructed in accordance with the manufacturer's specifications/drawings.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil/online.

AMSC N/A FSC 2530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.

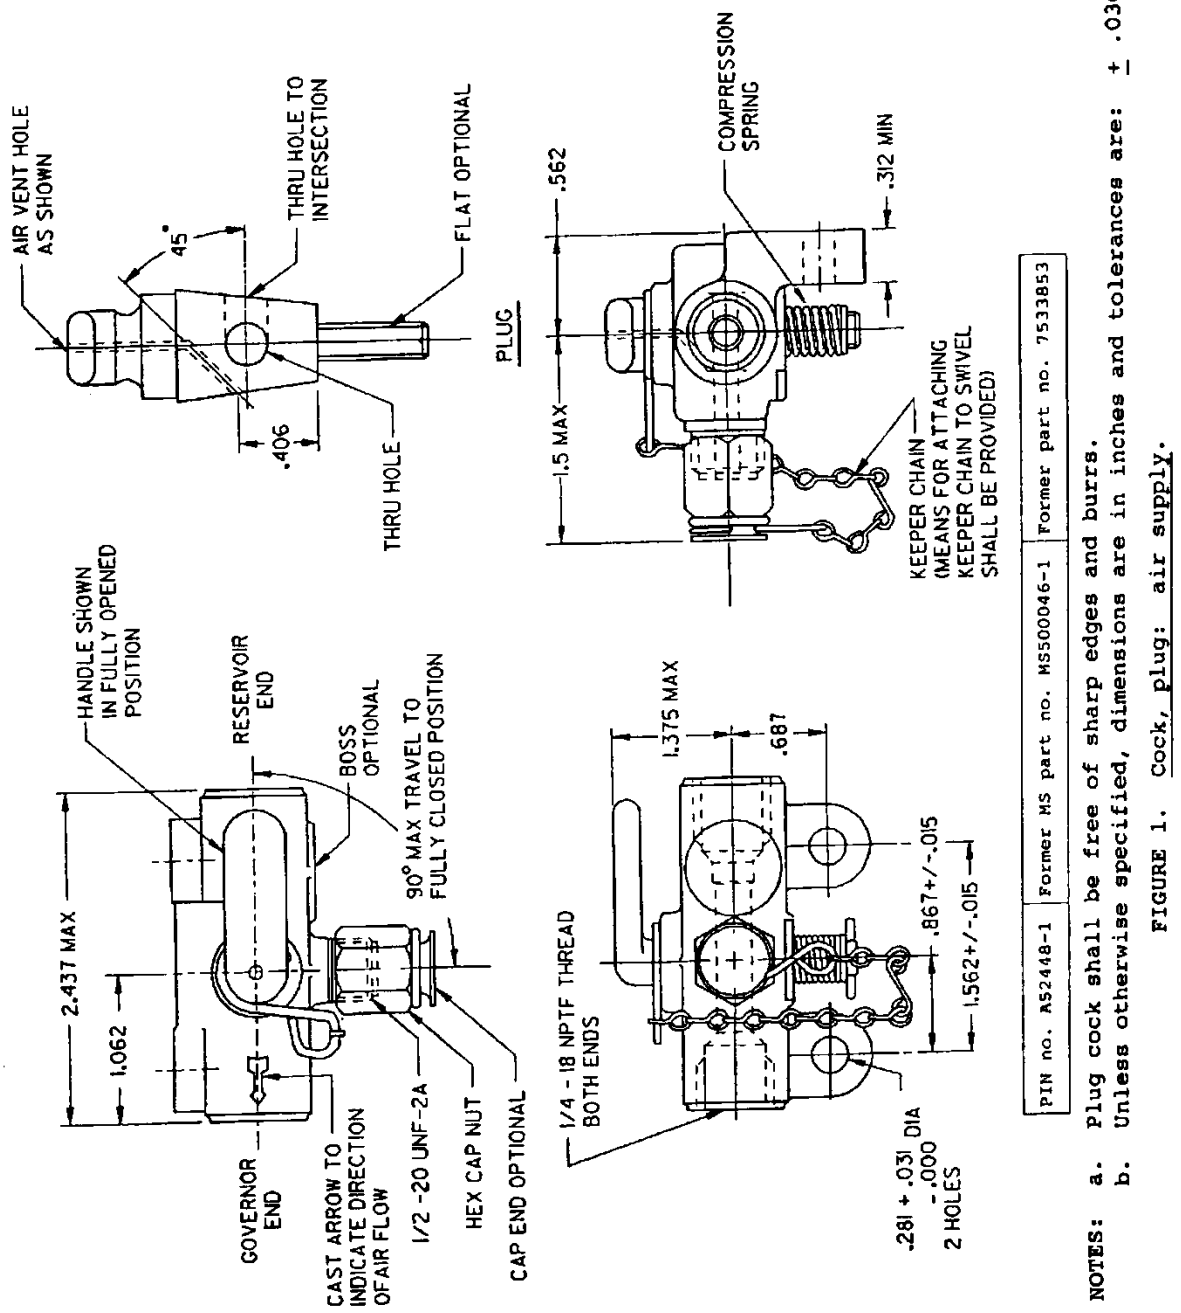

PIN no. A52448-1	Former MS part no. MS500046-1	Former part no. 7533853

NOTES: a. Plug cock shall be free of sharp edges and burrs.
b. Unless otherwise specified, dimensions are in inches and tolerances are: ± .030.

FIGURE 1. Cock, plug: air supply.

Figure 1. Component design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.

2.3 Performance. Leakage shall be no more than a 1/2 inch bubble in five seconds at 100 pounds per square inch (psi) pressure with the handle in the fully opened position (see figure 1) and with air vent at top plugged.

2.4 Identification markings. Identification markings shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE) and part number, and the part identification number (PIN) A52448-1.

3. REGULATORY REQUIREMENTS

3.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR)

4. PRODUCT CONFORMANCE PROVISIONS

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. PACKAGING

Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract or order (see note b).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Addresses for obtaining copies of referenced documents. Copies of the FAR can be obtained from https://www.acquisition.gov/far/ or are available from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Copies of ASTM B633-85 "Standard Specification for Electroplated Coatings Of Zinc on Iron and Steel", can be obtained from www.astm.org or are available from the American Society for Testing and Materials, 1916

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.

Race Street, Philadelphia, PA 19103-1187. Copies of Institute of Electrical and Electronic Engineers (IEEE) standards may be obtained at www.ieee.org or are available from IEEE Operations Center Sales Office, 445 Hoes Lane, PO Box 1331, Piscataway, NJ, 08855-1331.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. If required, the specific issue of the individual documents referenced.
c. PIN number and quantity of plug cocks required.
d. Selection of applicable level and packaging requirements.

6.3 Cross-reference data. Plug cocks conforming to this CID are interchangeable/substitutable with plug cocks conforming to MS500046B, dated 16 February 1988.

6.4 Metric products. Metric cock plugs will be considered on the following basis:

6.4.1 Metric dimensions. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of IEEE/ASTM SI10, and all other requirements of this CID are met.

6.4.2 Metric tolerances. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

6.4.3 Metric acceptance. The contracting officer has the option of accepting or rejecting the product.

6.5 Key words.

Vehicle
Fittings
Hardware
Component

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – AT
Air Force – 99
Navy – MC

Review Activity:
DLA – CC

PREPARING ACTIVITY:
Army - AT

(Project 2530-2010-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/online.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:09Z
Check the source to verify that this is the current version before use.