INCH-POUND

A-A-52461A
22 April 2019
SUPERSEDING
A-A-52461
12 August 1993

COMMERCIAL ITEM DESCRIPTION
STRAINER, SEDIMENT: AUTOMOTIVE FUEL (10 GPH)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE.

1.1 Scope. This CID covers requirements for fuel filter strainers for use in the fuel system of internal combustion gasoline engines and accessories.

2. CLASSIFICATION

2.1 Classification. Strainers shall be furnished in the following types:

Type I - Strainer with shutoff valve.
Type II - Strainer without shutoff valve.

3. SALIENT CHARACTERISTICS.

3.1 Materials. Unless otherwise specified herein, the materials used shall be in accordance with the manufacturer's material specifications for strainers. The use of recovered materials made in conformance with regulatory requirements is acceptable providing that all requirements of this CID are met (see note 6.5).

3.2. Cover (head). The cover shall be made of a material which shall allow the strainer to perform to the requirements of this CID. If made of steel, cover material shall be zinc coated and the finished cover shall be treated with a corrosion inhibitor as per ASTM-D6386.

3.3 Bowl. The bowl material shall be brass, annealed, per ASTM-B36/B36M Unified Numbering System C24000, C26000, or C26800; zinc coated steel strip, carbon, cold rolled, per ASTM-A109/A109M; or glass, annealed, transparent. Steel bowls shall be treated with a corrosion inhibitor as per ASTM-D6386.

Comments, suggestions, or questions on this document should be sent by email to: usarmy.detroit.rdecom.mbx.tardec-standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 2910
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

3.4 Strainer element. The strainer element material shall be wire fabric, industrial per ASTM–E 2016, table II, 100 mesh, wire diameter (dia) 0.0045 inch (in.) or 120 mesh, wire (dia) 0.0037 in. Material: Steel, stainless, type 304 or 316; brass, high zinc content, copper-zinc alloy; or commercial bronze-copper, commercially pure.

3.5 Bowl. The filter bowl gasket material shall be in accordance with A-A-52468.

3.6 Envelope. The strainer shall be constructed to the form and dimensions as specified herein (see figure 1).The filter bowl shall be compatible with the bowl gasket. Design and construction that is not specified herein shall be in accordance with the best commercial practices.

3.7 Bowl gasket. The filter bowl gasket shall be in accordance with A-A-52468.

3.8 Servicing. Servicing, including cleaning and reassembly, shall be easily accomplished without disturbing the strainer's connection to the engine and shall be designed to prevent improper assembly.

4. PRODUCT PREFORMANCE PROVISIONS

4.1 Pressure-temperature resistance. The strainer shall show no signs of leakage or permanent deformation after being pressure tested at -65°+ 3 degrees Fahrenheit (°F), 80 +3°F, and 160, +3°F. The pressure used in this test shall be 15 pounds per square inch (psi). Test fluids shall be used for the -65°F and 80°F tests. Air shall be used for the 160°F test. For all tests the pressure shall be applied for 5 minutes and reduced to zero.

4.2 Flow rate. The nominal flow rate through the strainer shall be 10 gallons per hour (gph). The maximum differential pressure across the strainer shall not exceed 4 psi.


4.3 Vibration resistance. The strainer shall show no evidence of cracking, deformation, loosening or leakage in the body at gaskets or at the fittings after exposure to a sinusoidal vibration for 3 hours along each axis. A frequency range of 5 to 500 cycles per second shall be used. The sweep time for the frequency range of 5 Hertz (Hz) to 500 Hz and return to 5 Hz shall be 15 minutes.

4.4. Identification and markings. Identification and marking of strainers shall be permanent and legible and shall include as a minimum the manufacturer's identification code (CAGE), and the part identification number (PIN) (see notes 6.2 and 6.3).

4.5 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

4.6 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

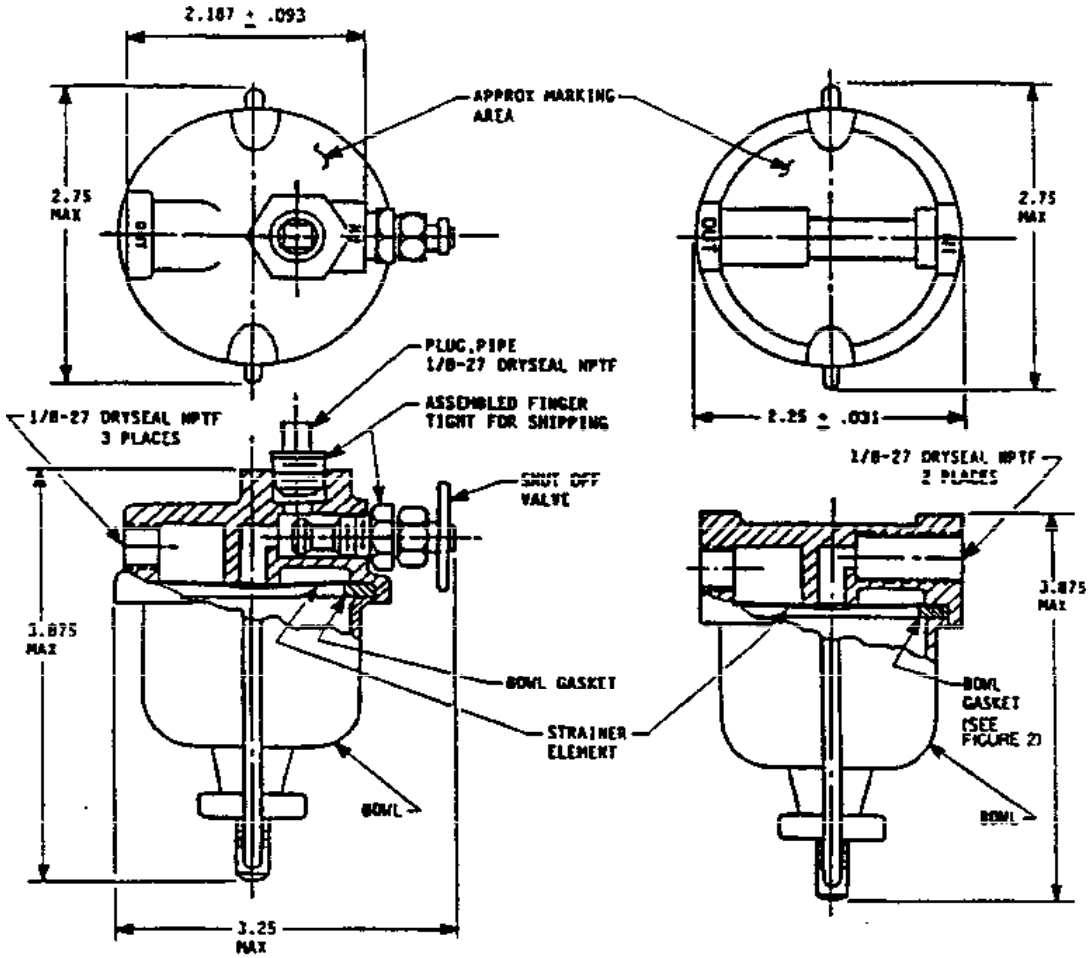

(VALVE OPEN)
Type I

Type II

CROSS REFERENCE			
Type	CID Part number	Former MS part number	Former Army part number
I	AS2461-1	MS51086-1	7089773
II	AS2461-2	MS51086-2	NONE

NOTES:
1. Dimensions are in inches.
2. MAX = Maximum.
3. APPROX = Approximate.

FIGURE 1. Strainer, sediment: automotive fuel (10 GPH).

5. PACKAGING.

5.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

6. NOTES.


(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Addresses for obtaining copies of non-Government publications. Copies of ASTM-A109/109M “Standard Specifications for Steel Strip, Carbon, Cold Rolled”, ASTM-B36/B36M “Standard Specifications for Brass Plate, Sheet, Strip and Rolled Bar”, ASTM-D6386 “Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Painting”, and ASTM-E2016 “Standard Specification for Industrial Woven Wire Cloth” are available from www.astm.org or ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

6.2 Ordering data. The contract or order should specify the following:

a. Title, number, and date of this CID.
b. Type of strainer.
c. Part identification number (PIN).
d. Selection of applicable level and packaging requirements.

6.3 Part or identification number (PIN). The PIN’s to be used for the strainers acquired to this CID are created as follows:

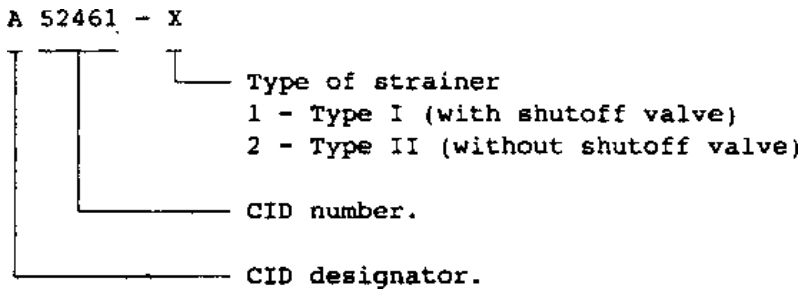

6.4 Cross-reference data. Strainers conforming to this CID are interchangeable/substitutable with strainers conforming to MS51086H and MIL-F-45356B, dated 10 December 1991 and 25 July 1984 respectively.

6.5 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Custodians:

Army - AT
Air Force – 99

Preparing Activity:
Army - AT

Review Activities:

Army – CR4
Navy – MC
Air Force - 70
DLA – CC

(Project 2910-2019-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.