INCH-POUND
MS17348H
w/AMENDMENT 2
10 April 2024
SUPERSEDING
MS17348H
w/AMENDMENT 1
24 February 2017

MILITARY SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, ELECTRICAL, JAM NUT (BOX)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22992.

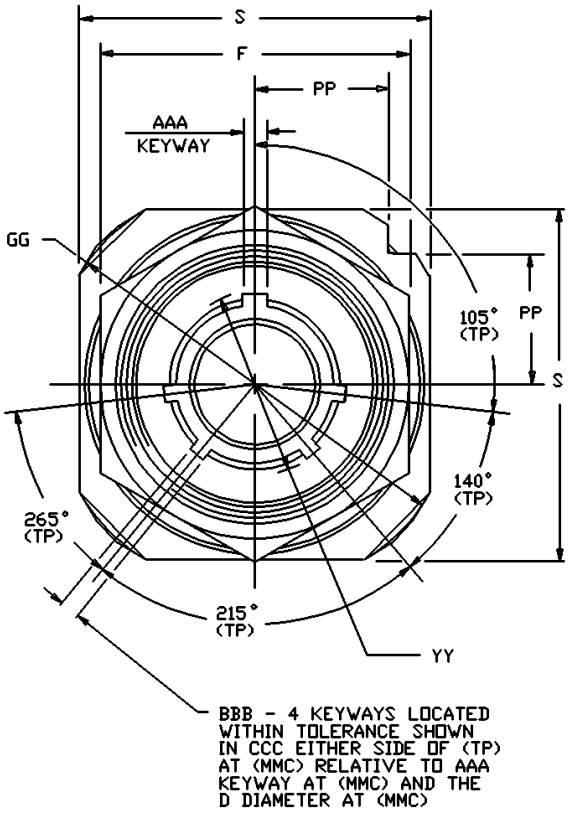



FIGURE 1. Configuration and dimensions.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

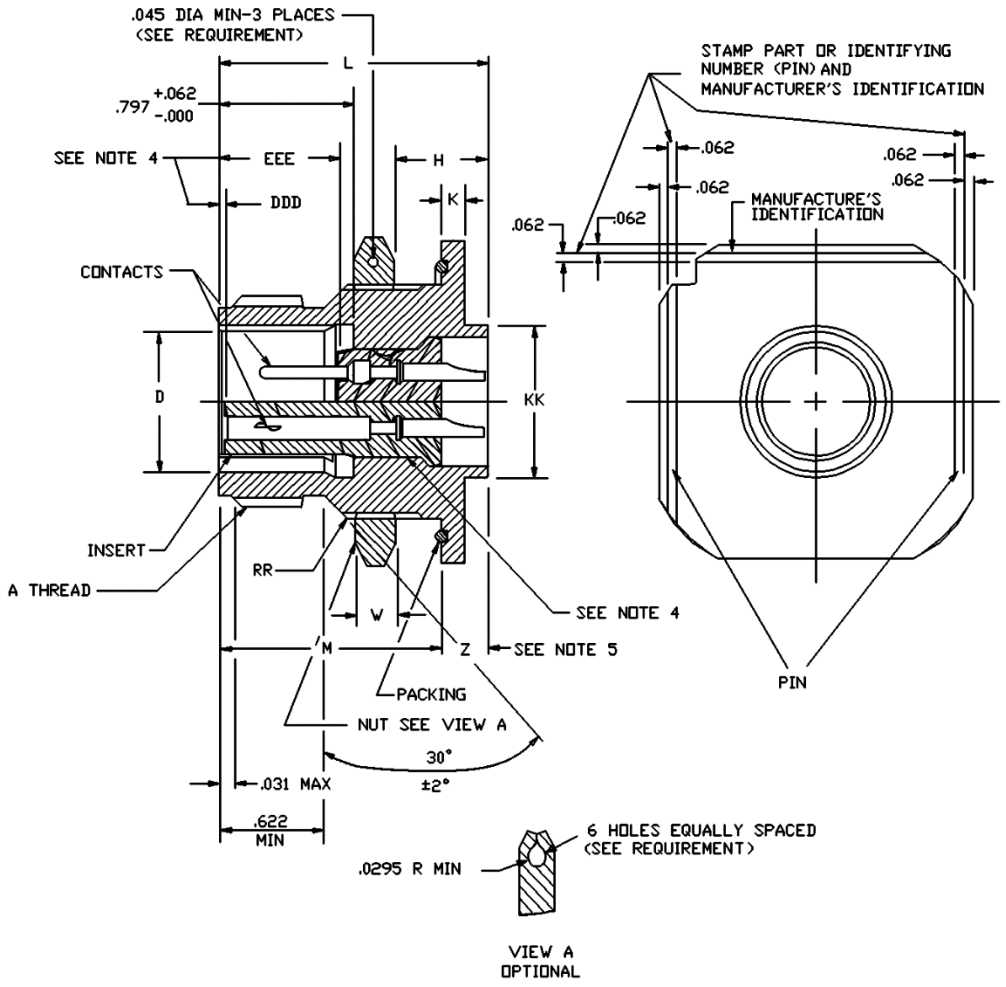



FIGURE 1. Configuration and dimensions – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Shell size | A Thread (plated) class 2A | D dia + .005 - .010 | F hex + .017 - .016 | H Panel thickness | | K + .006 - .005 | L + .011 - .010 |
|---|---|---|---|---|---|---|---|
| | | | | min | max | | |
| 12 | 0.8750-0.1P-0.2L-DS | .567 | 1.250 | .094 | .297 | .125 | 1.578 |
| 14 | 1.0000-0.1P-0.2L-DS | .692 | 1.312 | .094 | .297 | .125 | 1.578 |
| 16 | 1.1250-0.1P-0.2L-DS | .817 | 1.500 | .094 | .297 | .188 | 1.578 |
| 18 | 1.2500-0.1P-0.2L-DS | .942 | 1.562 | .094 | .266 | .188 | 1.578 |
| 20 | 1.3750-0.1P-0.2L-DS | 1.068 | 1.750 | .094 | .266 | .188 | 1.578 |
| 22 | 1.5000-0.1P-0.2L-DS | 1.192 | 1.875 | .094 | .266 | .188 | 1.578 |
| 24 | 1.7500-0.1P-0.2L-DS | 1.317 | 2.125 | .094 | .328 | .188 | 1.641 |
| 28 | 2.0000-0.1P-0.2L-DS | 1.536 | 2.375 | .094 | .328 | .219 | 1.641 |
| 32 | 2.2500-0.1P-0.2L-DS | 1.786 | 2.625 | .094 | .328 | .219 | 1.641 |
| 36 | 2.5000-0.1P-0.2L-DS | 2.005 | 2.875 | .094 | .328 | .219 | 1.641 |
| 40 | 2.7500-0.1P-0.2L-DS | 2.255 | 3.125 | .094 | .328 | .219 | 1.641 |
| 44 | 3.0000-0.1P-0.2L-DS | 2.545 | 3.375 | .094 | .328 | .219 | 1.641 |

| Shell size | M | S | W + .017 - .000 | Z max (see note 5) | Z min (contact size 0 only) | DDD Socket insert location ± .030 | EEE Pin insert location ± .030 |
|---|---|---|---|---|---|---|---|
| 12 | 1.235 | 1.375 | .188 | .429 | NA | .020 | .729 |
| 14 | 1.235 | 1.500 | .188 | .429 | NA | .020 | .729 |
| 16 | 1.235 | 1.750 | .188 | .461 | NA | .020 | .729 |
| 18 | 1.203 | 1.875 | .188 | .461 | NA | .020 | .729 |
| 20 | 1.203 | 2.000 | .188 | .461 | .535 | .020 | .729 |
| 22 | 1.203 | 2.125 | .188 | .461 | .535 | .020 | .729 |
| 24 | 1.266 | 2.375 | .188 | .398 | .472 | .020 | .729 |
| 28 | 1.329 | 2.625 | .250 | .335 | .409 | .020 | .729 |
| 32 | 1.329 | 2.875 | .250 | .335 | .409 | .020 | .729 |
| 36 | 1.329 | 3.125 | .250 | .335 | .409 | .020 | .729 |
| 40 | 1.329 | 3.406 | .250 | .335 | .409 | .020 | .729 |
| 44 | 1.329 | 3.656 | .250 | .562 | .409 | .039 | .764 |

FIGURE 1. Configuration and dimensions – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Shell size | GG dia | KK dia + .011 - .010 | PP + .011 - .010 | RR Thread (plated) class 2A |
|---|---|---|---|---|
| 12 | 1.562 | .640 | .486 | 1.0000-20 UNEF |
| 14 | 1.750 | .765 | .530 | 1.1250-18 UNEF |
| 16 | 2.000 | .890 | .623 | 1.2500-18 UNEF |
| 18 | 2.125 | 1.015 | .663 | 1.3750-18 UNEF |
| 20 | 2.250 | 1.171 | .707 | 1.5000-18 UNEF |
| 22 | 2.500 | 1.296 | .751 | 1.6250-18 UNEF |
| 24 | 2.750 | 1.421 | .840 | 1.8750-16 UN |
| 28 | 3.000 | 1.625 | .928 | 2.1250-16 UN |
| 32 | 3.250 | 1.891 | 1.017 | 2.3750-16 UN |
| 36 | 3.500 | 2.078 | 1.104 | 2.6250-16 UN |
| 40 | 3.750 | 2.312 | 1.213 | 2.8750-16 UN |
| 44 | 4.000 | 2.562 | 1.299 | 3.1250-16 UN |

| Shell size | YY dia + .010 - .006 | AAA | BBB | CCC | Packing preformed size (see note 6 ) |
|---|---|---|---|---|---|
| 12 | .647 | .126 + .007 / - .001 | .063 + .007 / - .001 | .0035 | SAE-AS29513-24 |
| 14 | .772 | .126 + .007 / - .001 | .063 + .007 / - .001 | .0035 | SAE-AS29513-26 |
| 16 | .897 | .182 + .010 / - .001 | .108 + .010 / - .001 | .007 | SAE-AS29513-127 |
| 18 | 1.022 | .182 + .010 / - .001 | .108 + .010 / - .001 | .007 | SAE-AS29513-129 |
| 20 | 1.148 | .182 + .010 / - .001 | .108 + .010 / - .001 | .007 | SAE-AS29513-131 |
| 22 | 1.272 | .182 + .010 / - .001 | .108 + .010 / - .001 | .007 | SAE-AS29513-133 |
| 24 | 1.473 | .260 + .010 / - .001 | .155 + .010 / - .001 | .007 | SAE-AS29513-137 |
| 28 | 1.692 | .260 + .010 / - .001 | .155 + .010 / - .001 | .007 | SAE-AS29513-141 |
| 32 | 1.942 | .260 + .010 / - .001 | .155 + .010 / - .001 | .007 | SAE-AS29513-145 |
| 36 | 2.161 | .260 + .010 / - .001 | .155 + .010 / - .001 | .007 | SAE-AS29513-149 |
| 40 | 2.411 | .260 + .010 / - .001 | .155 + .010 / - .001 | .007 | SAE-AS29513-234 |
| 44 | 2.692 | .260 + .010 / - .001 | .155 + .010 / - .001 | .007 | SAE-AS29513-236 |

FIGURE 1. Configuration and dimensions – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .001 | 0.03 | .328 | 8.33 | .897 | 22.78 | 1.536 | 39.01 | 2.875 | 73.03 |
| .0035 | 0.089 | .335 | 8.51 | .928 | 23.57 | 1.562 | 39.67 | 3.000 | 76.20 |
| .005 | 0.13 | .398 | 10.11 | .942 | 23.93 | 1.578 | 40.08 | 3.125 | 79.38 |
| .006 | 0.15 | .409 | 10.34 | 1.0000 | 25.400 | 1.625 | 41.28 | 3.258 | 82.75 |
| .007 | 0.18 | .429 | 10.89 | 1.015 | 25.78 | 1.641 | 41.68 | 3.375 | 85.73 |
| .010 | 0.25 | .461 | 11.71 | 1.017 | 25.83 | 1.692 | 42.98 | 3.406 | 86.51 |
| .011 | 0.28 | .472 | 11.99 | 1.022 | 25.96 | 1.750 | 44.45 | 3.500 | 88.90 |
| .016 | 0.41 | .486 | 12.34 | 1.068 | 27.13 | 1.786 | 45.36 | 3.656 | 92.86 |
| .017 | 0.43 | .530 | 13.46 | 1.104 | 28.04 | 1.875 | 47.63 | 3.750 | 95.25 |
| .020 | 0.51 | .535 | 13.59 | 1.1250 | 28.575 | 1.891 | 48.03 | 4.000 | 101.60 |
| .030 | 0.76 | .562 | 14.27 | 1.148 | 29.16 | 1.942 | 49.33 | | |
| .031 | 0.79 | .567 | 14.40 | 1.171 | 29.74 | 2.000 | 50.80 | | |
| .039 | 0.99 | .623 | 15.82 | 1.192 | 30.28 | 2.005 | 50.93 | | |
| .045 | 1.14 | .640 | 16.26 | 1.203 | 30.56 | 2.078 | 52.78 | | |
| .062 | 1.57 | .647 | 16.43 | 1.213 | 30.81 | 2.125 | 53.98 | | |
| .063 | 1.60 | .663 | 16.84 | 1.235 | 31.37 | 2.161 | 54.89 | | |
| .094 | 2.39 | .692 | 17.58 | 1.250 | 31.75 | 2.250 | 57.15 | | |
| .108 | 2.74 | .707 | 17.96 | 1.266 | 32.16 | 2.255 | 57.28 | | |
| .125 | 3.18 | .729 | 18.52 | 1.272 | 32.31 | 2.312 | 58.72 | | |
| .126 | 3.20 | .751 | 19.08 | 1.296 | 32.92 | 2.317 | 58.85 | | |
| .155 | 3.94 | .764 | 19.41 | 1.299 | 32.99 | 2.375 | 60.33 | | |
| .182 | 4.62 | .765 | 19.43 | 1.312 | 33.32 | 2.411 | 60.24 | | |
| .188 | 4.78 | .772 | 19.61 | 1.317 | 33.45 | 2.500 | 63.50 | | |
| .219 | 5.56 | .797 | 20.24 | 1.329 | 33.75 | 2.562 | 65.07 | | |
| .250 | 6.35 | .817 | 20.75 | 1.375 | 34.93 | 2.625 | 66.68 | | |
| .260 | 6.60 | .840 | 21.34 | 1.473 | 37.42 | 2.692 | 68.38 | | |
| .266 | 6.76 | .8750 | 22.225 | 1.5000 | 38.100 | 2.750 | 69.85 | | |

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .016 (0.41 mm).
3. Metric equivalents are given for information only.
4. Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.
5. For size 0 contacts only: Increase Z dimension by .312 (7.92 mm) for shell sizes 12 through 40, and increase Z dimension by .062 (1.57 mm) for shell size 44.
6. SAE-AS29513 dash numbers are for dimensions only. Packing material utilized for specified O-rings shall meet the performance requirements of MIL-DTL-22992.

FIGURE 1. Configuration and dimensions – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Mates with plugs specified on MS17344 and covers specified on MS17349.

Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).

For shell size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.

Shell finish: See MIL-DTL-22992.

Safety wire shall not pull out of safety wire holes when safety wire NI-CU alloy (monel ™) (UNS N04400) or NI-CR alloy (inconel ™) (UNS N06600), .020 inches (0.51 mm) diameter and in accordance with NASM20995, is threaded through a hole and a pull of 30 lbs (13.61kg) minimum is applied. Two pulls shall be made, one parallel with axis of nut and one perpendicular to axis of nut.

Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).

Part or Identifying Number (PIN) example.




Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-22992, this document references the following.

MS17344
MS17349
MIL-STD-1651
NASM20995
SAE-AS29513



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – YD
Air Force – 85
NASA – NA
DLA – CC

Preparing activity:
DLA – CC

Review activities:
Army – AR, MI
Navy – AS, CG, MC, OS, SH
Air Force – 19

(Project 5935-2024-120)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.