FED. SUP CLASS
4820

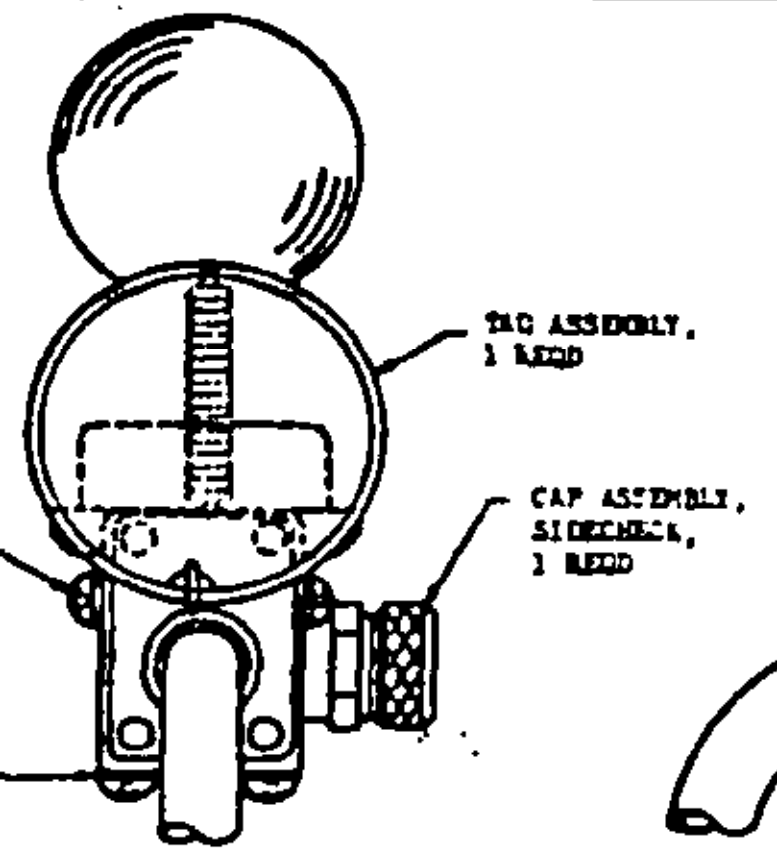

TAG ASSEMBLY, 1 REQD
CAP ASSEMBLY, SIDECHECK, 1 REQD
SCREW, MS35214-38 4 REQD
LOCKWASHER AN936A8 4 REQD

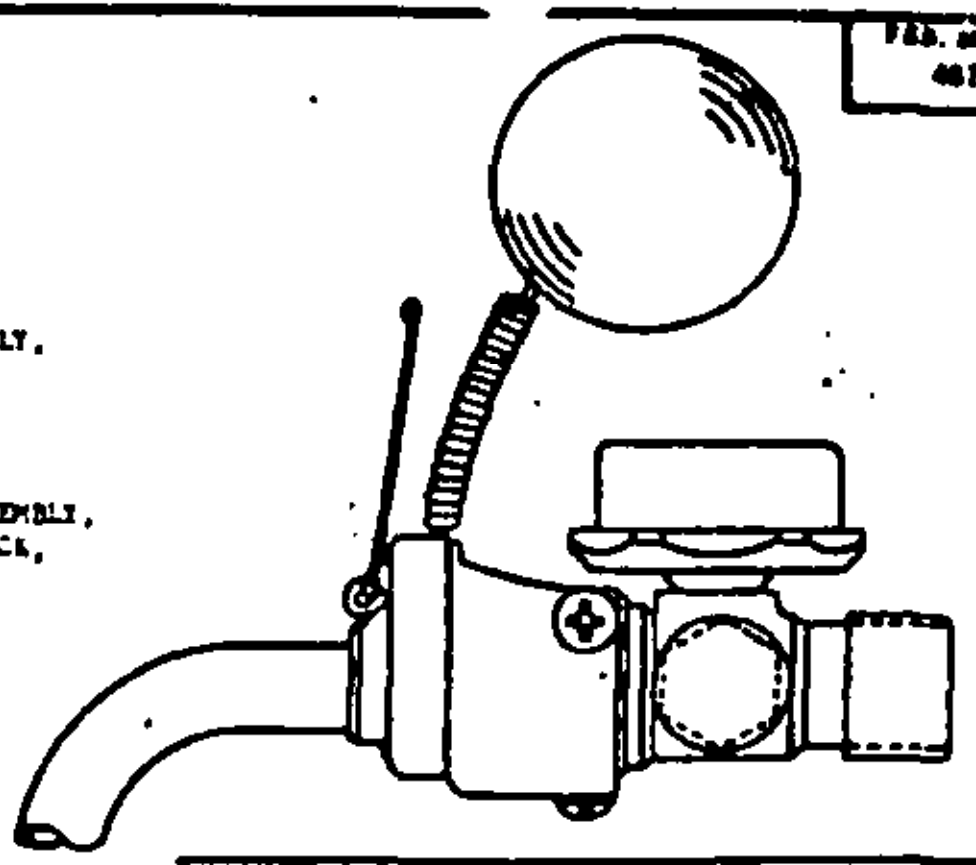

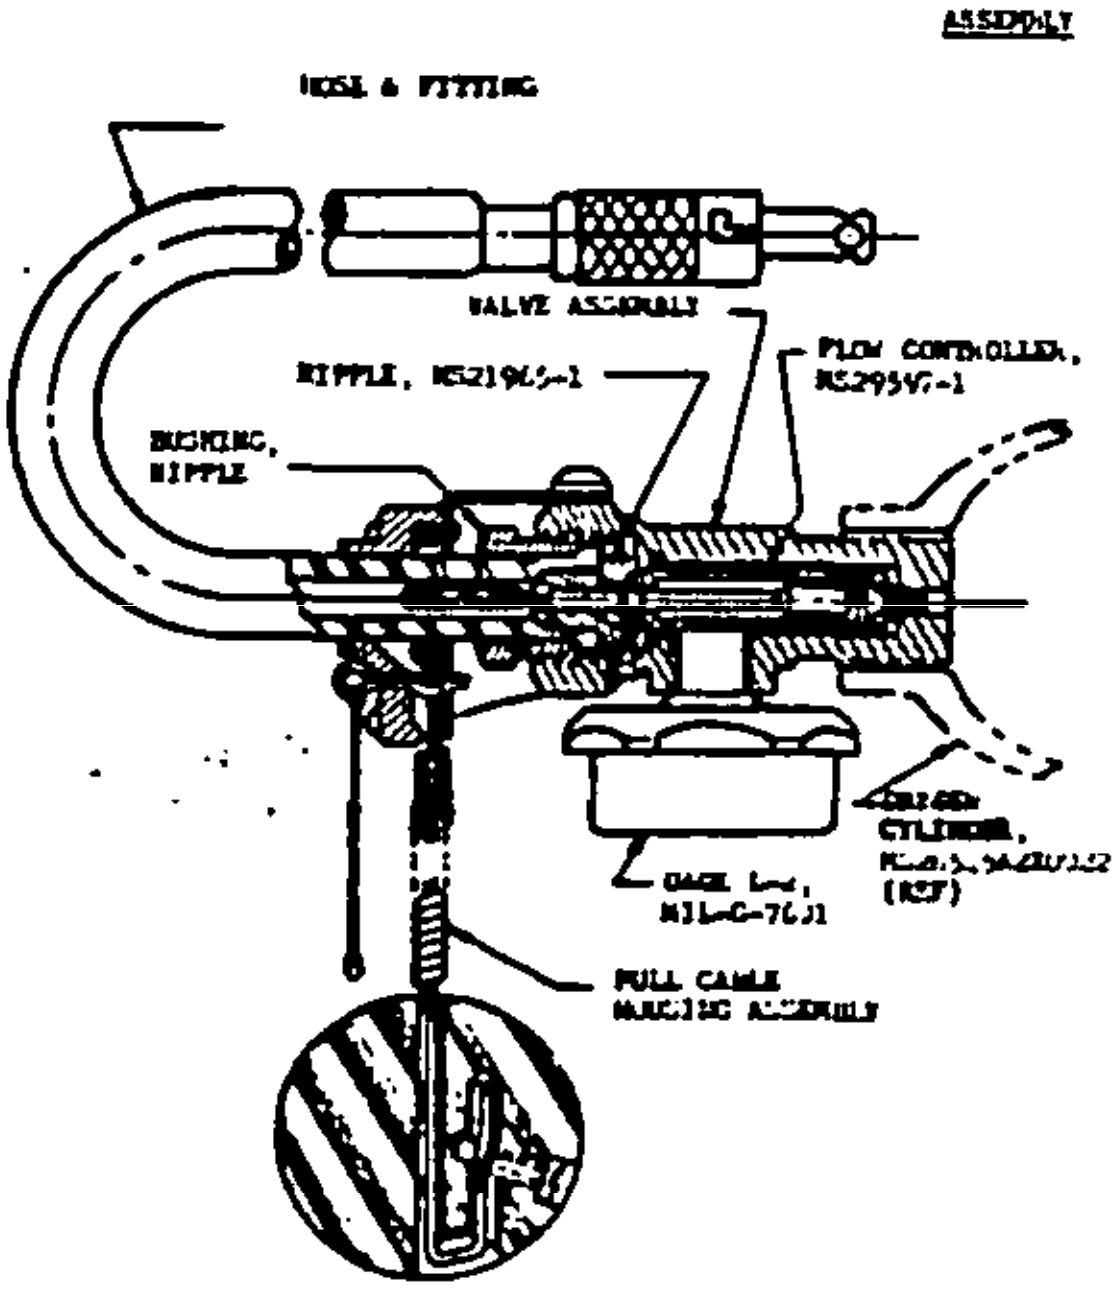

ASSEMBLY
HOSE & FITTING
VALVE ASSEMBLY
NIPPLE, MS21965-1
FLOW CONTROLLER, MS29597-1
BUSHING, NIPPLE
OXYGEN CYLINDER, MIL-C-... (REF)
GAGE Low, MIL-G-7631
PULL CABLE HOUSING ASSEMBLY

SECTIONAL VIEW REVOLVED 180° VALVE AND HOSE ASSEMBLY.

| VALVE ASSEMBLY | | | | |
|---|---|---|---|---|
| DASH NO. | HOSE LENGTH IN. | PULL CABLE | | SUPERSEDED PART NO. |
| | | TYPE | LENGTH PRIOR TO ASSEMBLY | |
| -1 | 24 | OPEN | 16.25 | |
| -31 | 20 | | | MS21964-1 |
| -32 | | | 6.00 | MS21964<br>-2, -3 |
| -33 | | HOOKED | 27.31 | MS21964-5 |
| VALVE COMPONENTS | | | | |
| -6 | | SPRING, SIDE CHECK | | 44A2509[illegible] |
| -7 | | RETAINER ASSEMBLY, SIDE CHECK | | 51A2460 |
| -8 | | BUSHING ASSEMBLY, SIDE CHECK | | 53A3730 |
| -9 | | CAP AND SEAL ASSEMBLY, SIDE CHECK | | 53A3516 |
| -10 | | GASKET, HOUSING SIDE CHECK | | [illegible] |
| -11 | 24 | HOSE & FITTING ASSEMBLY | | 53A3731-1 |
| -18 | 18 | | | MS21964-12 |
| -13 | | HOUSING, PULL CABLE ASSEMBLY, OPEN TYPE | 6.00 | 51A3509-1 |
| -14 | | | 16.25 | 51B3509-2 |
| -15 | | HOUSING, PULL CABLE ASSEMBLY, HOOKED TYPE | | 57A3503 |
| -16 | | BUSHING, NIPPLE | | 44A25020 |
| -17 | | TAG ASSEMBLY | | [illegible] |
| -19 | | HOSE | | |
| -20 | | FITTING ASSEMBLY | | 7125416 |
| -21 | 28 | VALVE AND HOSE ASSEMBLY | | |

FINISH: IN ACCORDANCE WITH AMERICAN NATIONAL STANDARDS INSTITUTE B46-1-78 FINISH NOT SPECIFIED SHALL HAVE A MAXIMUM ROUGHNESS OF 125 MICROINCH.
DIMENSIONS IN INCHES. TOLERANCES AS SPECIFIED.
CAUTION: ALL PARTS OF OXYGEN SYSTEM SHALL BE FREE OF OIL, GREASE OR OTHER COMBUSTIBLE MATERIAL.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

MATERIAL: MATERIALS NOT SPECIFIED SHALL BE IN ACCORDANCE WITH MIL-V-7560.

RECLAIMED MATERIALS SHALL BE UTILIZED TO THE MAXIMUM EXTENT POSSIBLE WITHIN THE QUALITY LIMITS REQUIRED BY THIS DOCUMENT.

Ⓗ DENOTE CHANGES

REDRAWN

REVISED Ⓗ 18 Aug 86

APPROVED 18 NOV 68

| | | | |
|---|---|---|---|
| P.A. USAF - 71<br>Other Cust<br>Army - AV<br>Navy - AS<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR - STD-34/9F | TITLE<br>VALVE ASSEMBLY<br>EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7560 | SUPERSEDES:<br>USAF DWGS 51C3804, 57C3804 | | SHEET 1 OF 11 |

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

"This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable."

Review activities:
USAF - 11

User activities:
CL, MT

DD FORM 672-1 (COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

4820-0489

| | | DATE |
|---|---|---|
| DRAWN BY | | |
| TYPED BY | | |
| CHECKED BY | | |

NOTES TO PRINTER: REDUCE BORDER TO 8-27/32 X 9-3/4. PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8 X 10-1/2 SHEET.

FED. SUP CLASS
4820-

Ⓝ (NOTES CONT.)

"This standard is the subject of International Standardization Agreement ASCC AIR STD 14/9F. When revision or cancellation of this standard is proposed, the departmental custodian will inform their respective departmental standardization office so that appropriate action may be taken respecting the international agreement concerned."

APPROVED 18 NOV 68 REVISED Ⓝ FOR CHANGES SEE SHEET 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P.A. USAF - 71<br>Other Cust<br>ARMY - AV<br>NAVY - AS<br>AF - 39 | INTERNATIONAL INTEREST.<br>ASCC - AIR - STD-14/9F | TITLE<br>VALVE ASSEMBLY<br>EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7360 | SUPERSEDES: | USAF DWGS 51C3804, 57C3804 | SHEET 2 OF 11 |

DD FORM 1 MAY 1 672-1 (COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE

DRAWN BY ______________ ______

TYPED BY ______________ ______

CHECKED BY ______________ ______

NOTES TO PRINTER: REDUCE BORDER TO 6 - 27/32 X 9 - 3/4. PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10 - 1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10 - 1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8 X 10 - 1/2 SHEET

FED. SUP CLASS 4820

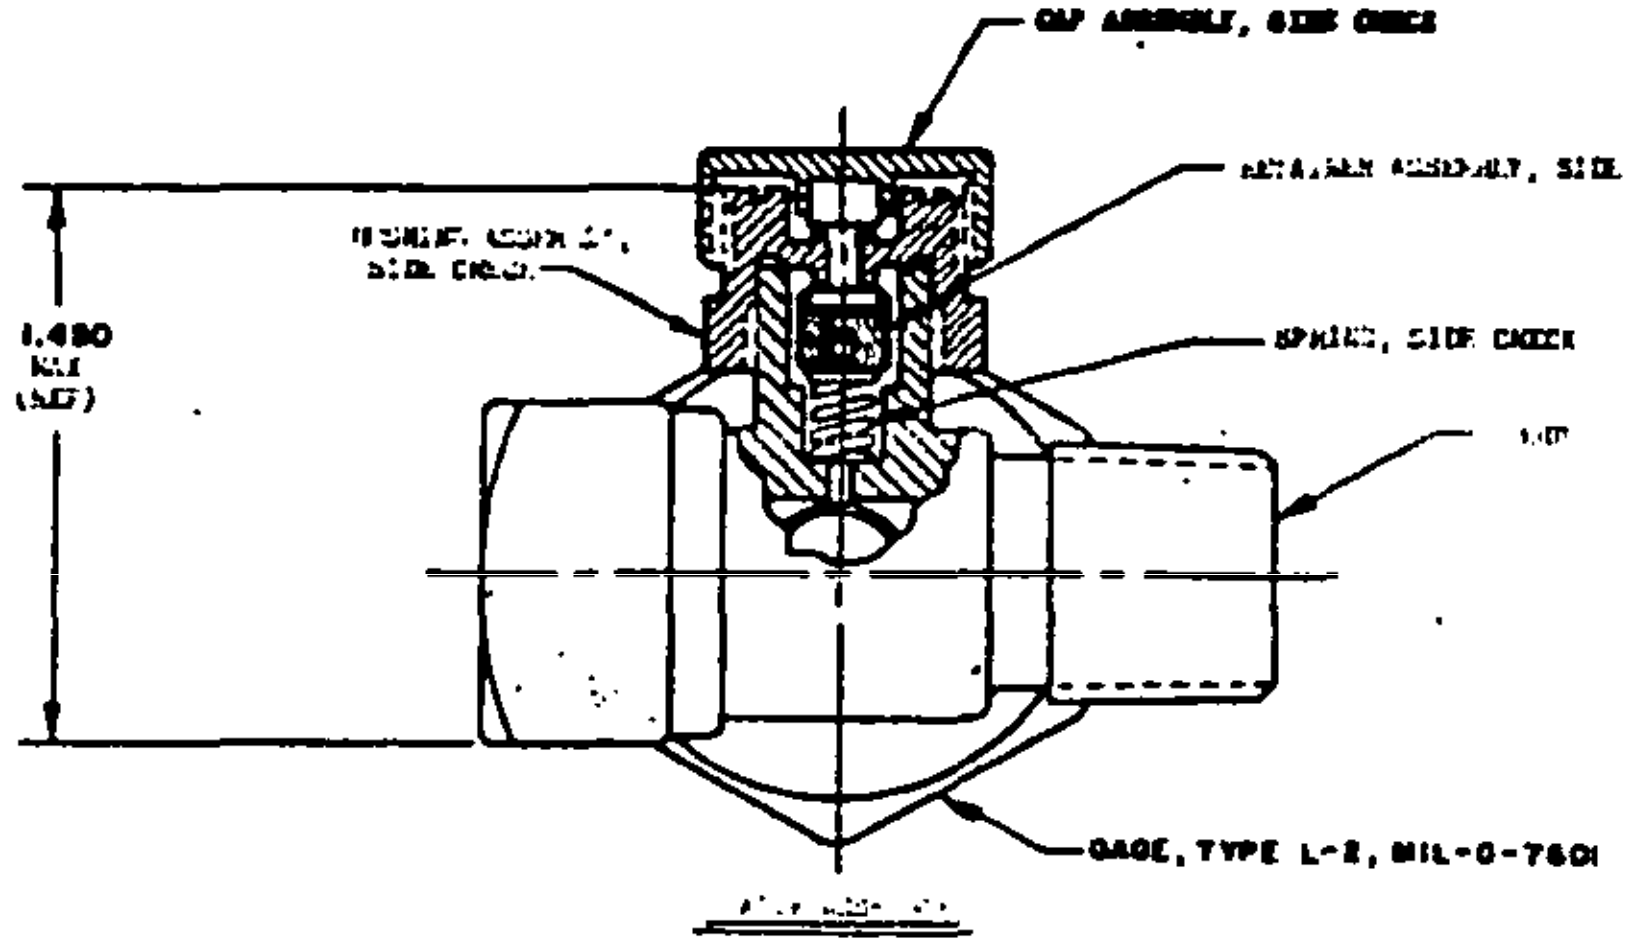
CAP ASSEMBLY, SIDE CHECK
RETAINER ASSEMBLY, SIDE CHECK
HOUSING ASSEMBLY, SIDE CHECK
SPRING, SIDE CHECK
1.480 MAX (REF)
GAGE, TYPE L-2, MIL-G-7601

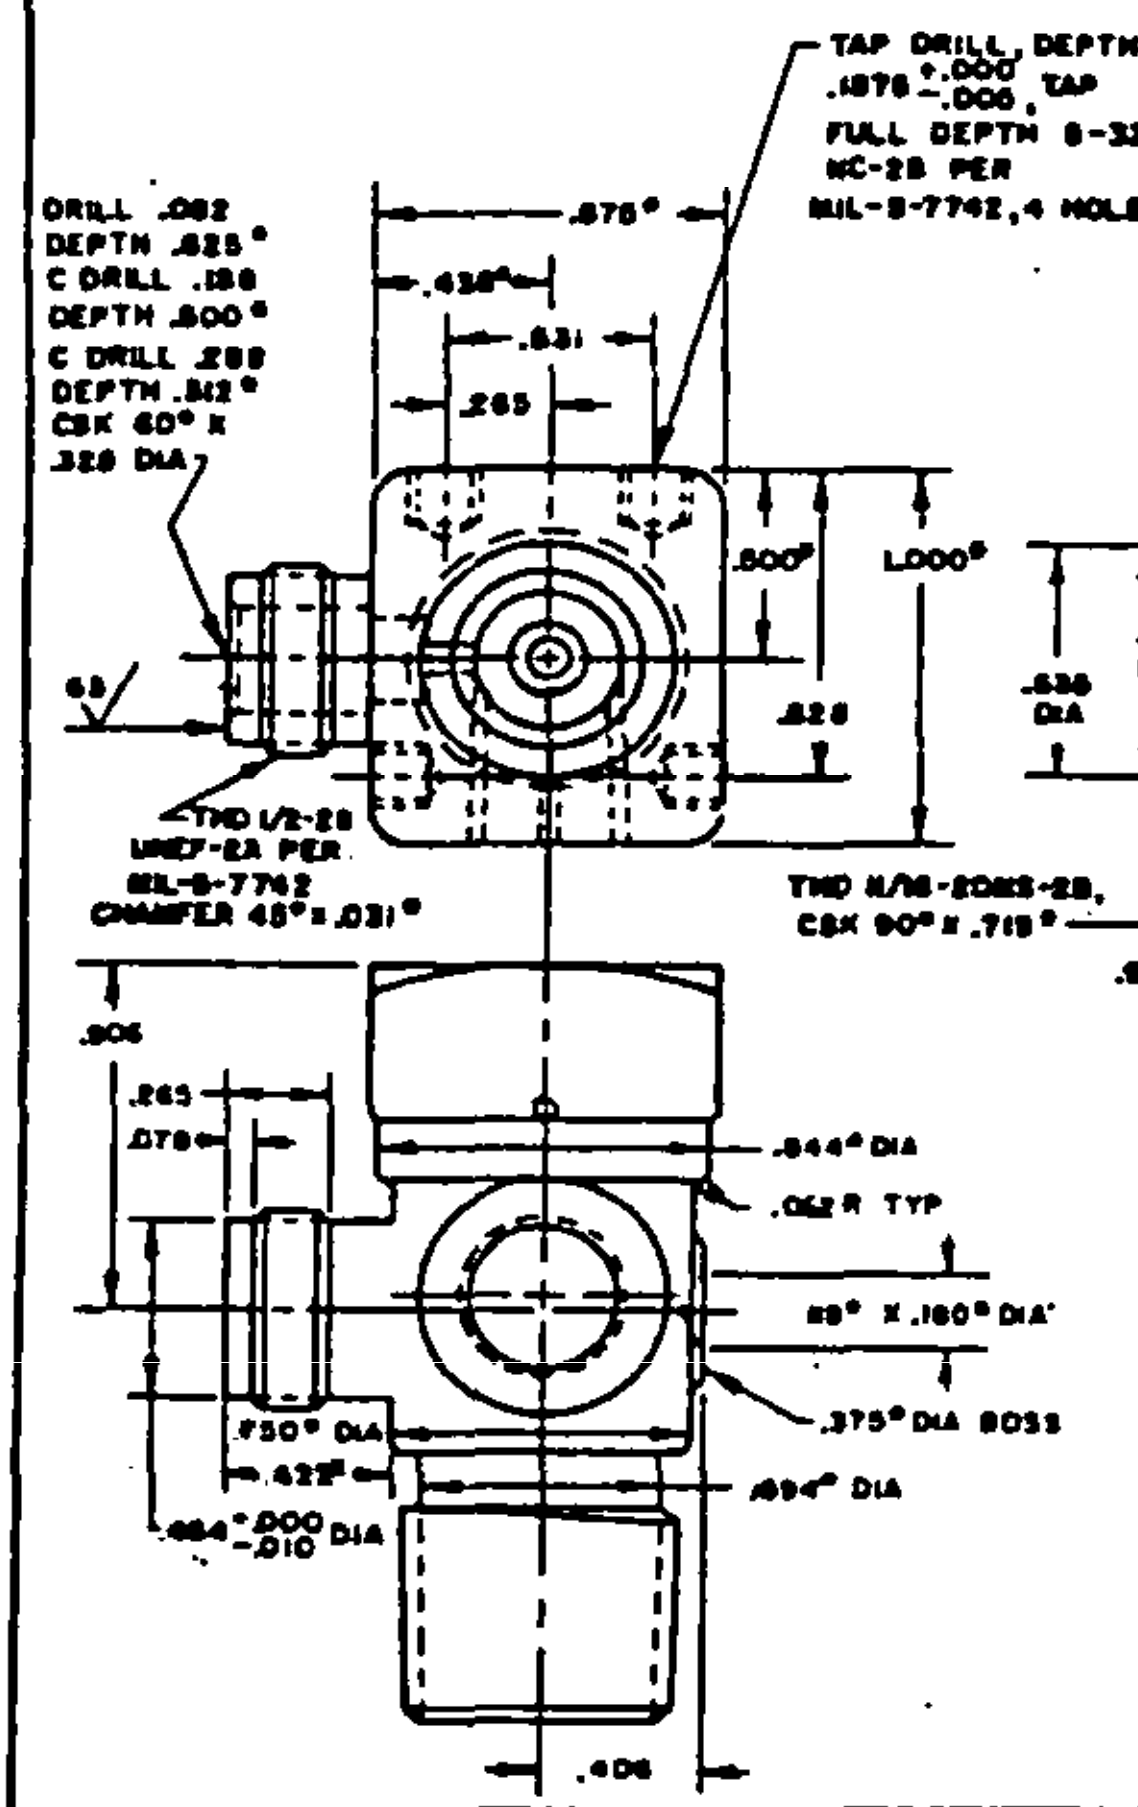
DRILL .082
DEPTH .625*
C DRILL .188
DEPTH .500*
C DRILL .288
DEPTH .312*
CSK 60° X
.328 DIA
TAP DRILL, DEPTH
.1875 +.000 -.006, TAP
FULL DEPTH 8-32
NC-2B PER
MIL-S-7742, 4 HOLES
.875*
.438*
.531
.265
.500*
1.000*
.828
63
THD 1/2-28
UNEF-2A PER
MIL-S-7742
CHAMFER 45° X .031*
.906
.265
.078
.844* DIA
.062 R TYP
.750* DIA
.422*
.684 +.000 -.010 DIA
89° X .160* DIA
.375* DIA BOSS
.694* DIA
.406

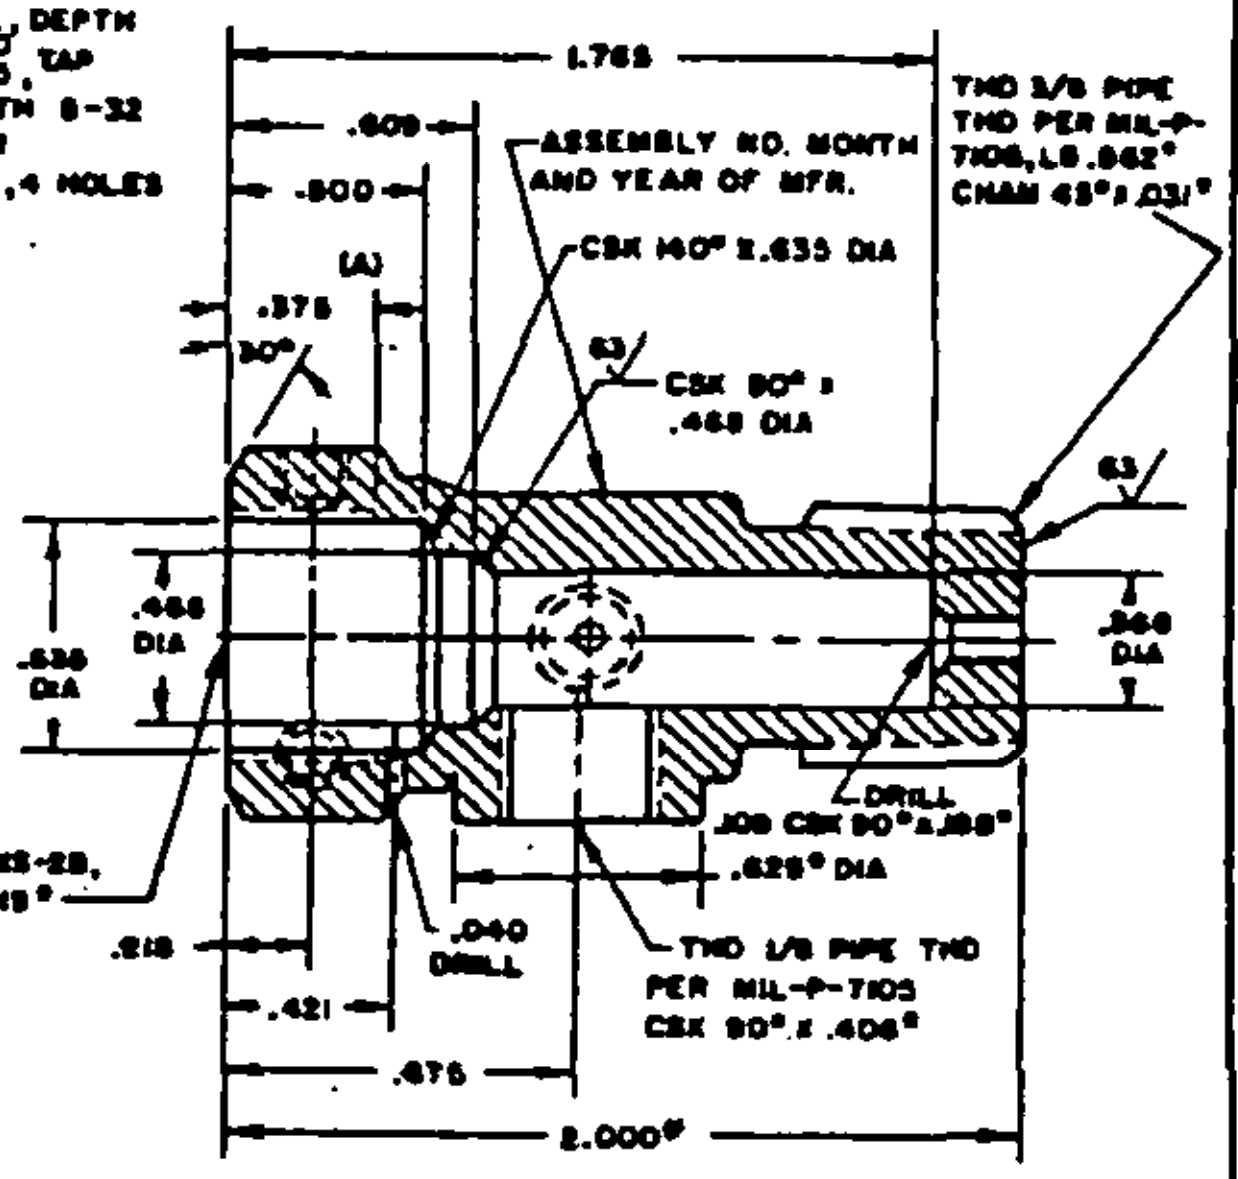
1.765
.609
.500
(A)
.375
30°
ASSEMBLY NO. MONTH
AND YEAR OF MFR.
CSK 140° X .635 DIA
63
CSK 90° X
.468 DIA
THD 3/8 PIPE
THD PER MIL-P-
7105, L8 .562*
CHAM 45° X .031*
63
.468 DIA
.636 DIA
.360 DIA
THD 11/16-20UNS-2B,
CSK 90° X .718*
DRILL
.109 CSK 90° X .188*
.625* DIA
.218
.040
DRILL
.421
THD 1/8 PIPE THD
PER MIL-P-7105
CSK 90° X .406*
.875
2.000*

(A) MINIMUM EFFECTIVE THREAD

MATERIAL: BRASS, QQ-B-626, ALLOY 377, 1/2 HARD-STRESS ANNEAL AFTER MACHINING.

TOLERANCES, UNLESS OTHERWISE SPECIFIED: DECIMALS ±.002, ANGLES ±1°, DECIMALS FOLLOWED BY AN ASTERISK (*) ±.015

REVISED (B) FOR CHANGES SEE SHEET 2

APPROVED 16 NOV 65

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P. A. USAF-71<br>Other Cust<br>NAVY - AS<br>ARMY - AV<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR<br>STD-24/9F | TITLE<br>VALVE ASSEMBLY, EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7960 | SUPERSEDES:<br>USAF DWGS 51A3805, 51C3806 | | SHEET 3 OF 11 |

DD FORM 1 OCT 61 672-1 (COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATE

DRAWN BY ______ ______

TYPED BY GEORGE A. [illegible] ASG 12/61/66

CHECKED BY ______ ______

NOTES TO PRINTER: REDUCE BORDER TO 8 - 27/32 X 9 - 3/4. PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 1/2 X 11 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 1/2 X 11 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8 1/2 X 11 SHEET.

FED. SUP CLASS
4820

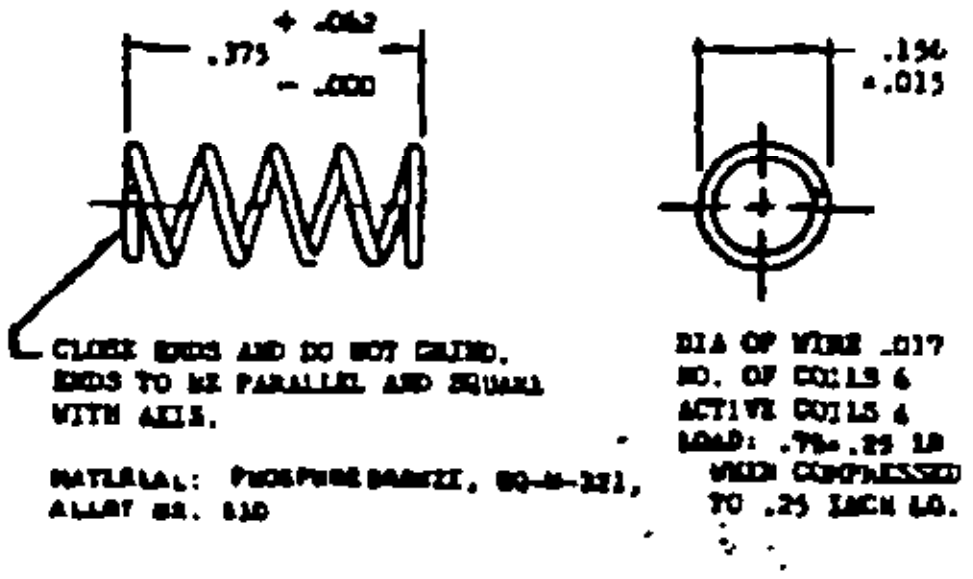
+ .062
.375
- .000
.156
±.015

CLOSE ENDS AND DO NOT GRIND. ENDS TO BE PARALLEL AND SQUARE WITH AXIS.

MATERIAL: PHOSPHOR BRONZE, QQ-B-321, ALLOY NO. 510

DIA OF WIRE .017
NO. OF COILS 6
ACTIVE COILS 4
LOAD: .75±.25 LB WHEN COMPRESSED TO .25 INCH LG.

-6
SPRING, SIDE CHECK

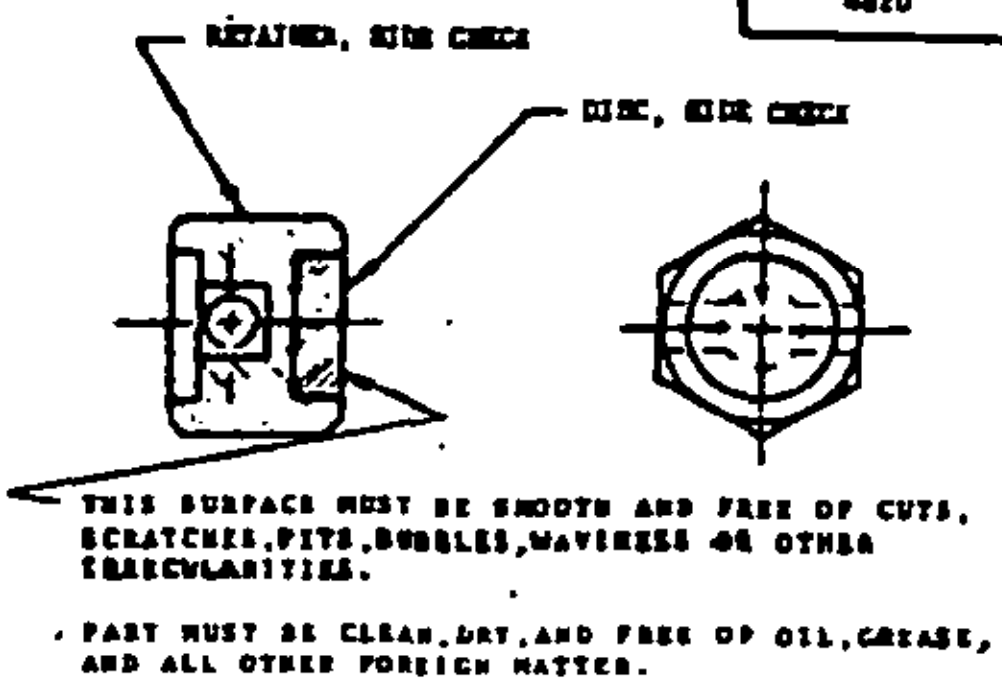
RETAINER, SIDE CHECK
DISC, SIDE CHECK

THIS SURFACE MUST BE SMOOTH AND FREE OF CUTS, SCRATCHES, PITS, BUBBLES, WAVINESS OR OTHER IRREGULARITIES.

PART MUST BE CLEAN, DRY, AND FREE OF OIL, GREASE, AND ALL OTHER FOREIGN MATTER.

-7
RETAINER ASSEMBLY, SIDE CHECK

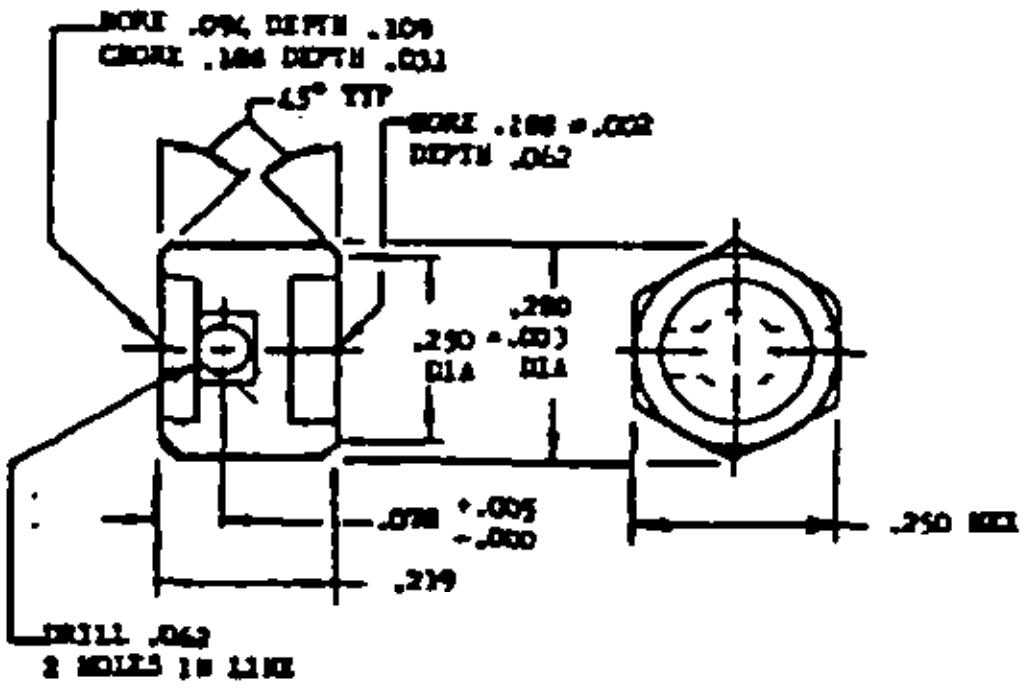
BORE .094, DEPTH .109
CBORE .106 DEPTH .031
45° TYP
BORE .188 ±.002
DEPTH .062
.280
.250 ±.003
DIA
DIA
.078 +.005
-.000
.219
.250 MAX
DRILL .062
2 HOLES IN LINE

MATERIAL: BRASS, QQ-B-626, ALLOY 360, 1/2 HARD.
REMOVE BURRS AND BREAK SHARP EDGES .005 MAX.
UNLESS OTHERWISE SPECIFIED, TOLERANCES:
DECIMALS ±.005, ANGLES ±1/2°

RETAINER, SIDE CHECK

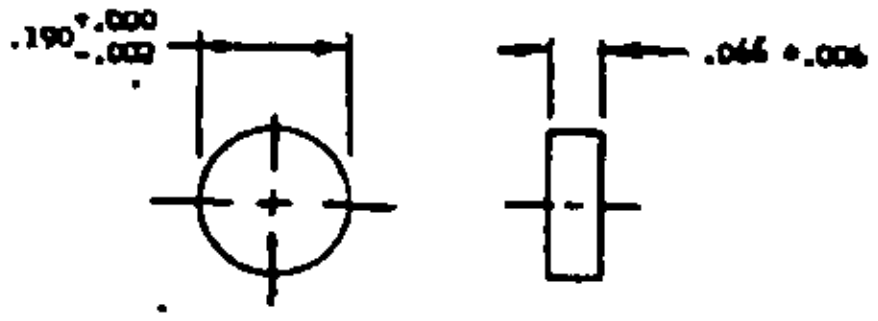
.190 +.000
-.002
.066 ±.006

MATERIAL: RUBBER, CLASS 2, TYPE A, GRADE 80, PER MIL-R-6855

DISC, SIDE CHECK

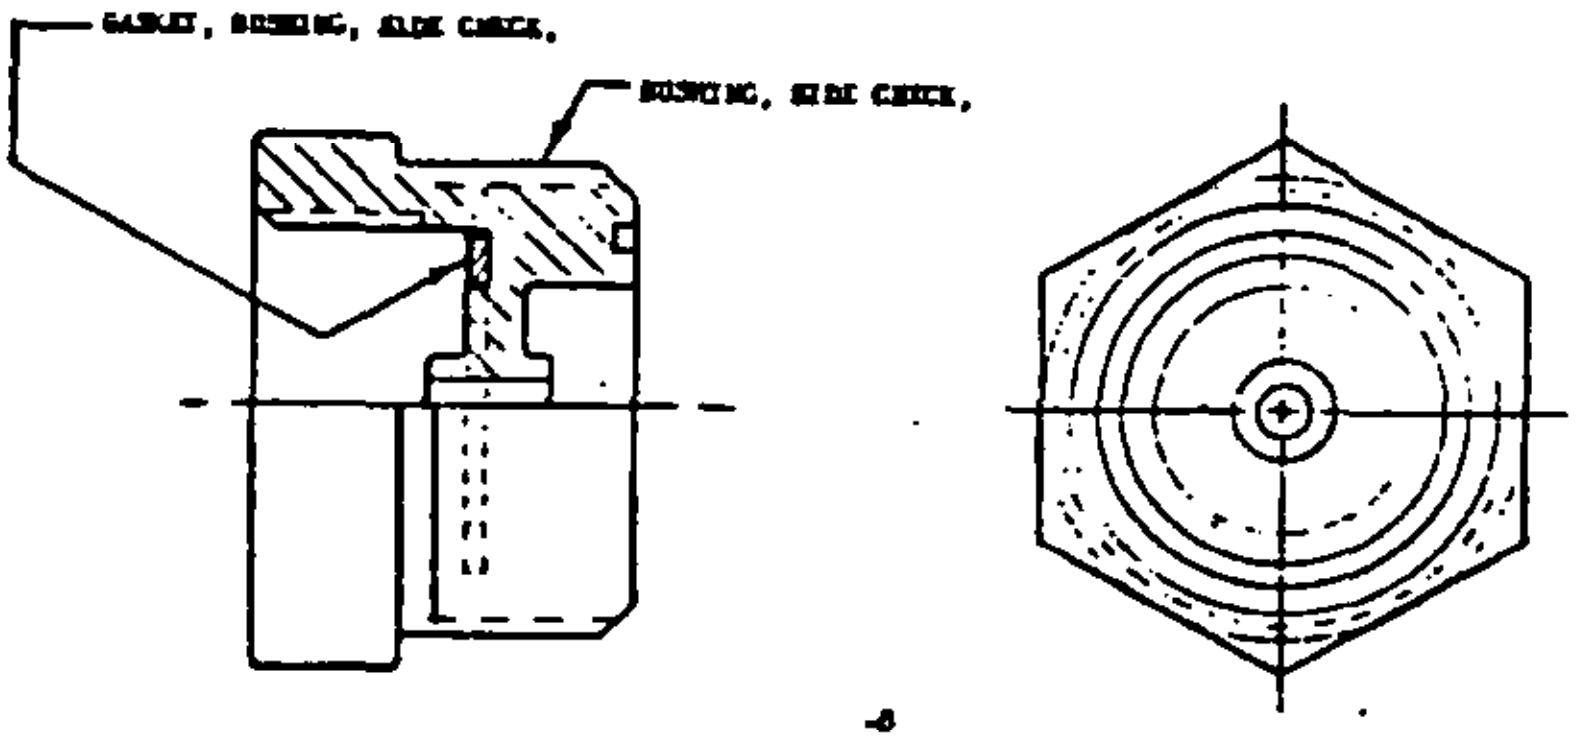
GASKET, BUSHING, SIDE CHECK,
BUSHING, SIDE CHECK,

-8
BUSHING ASSEMBLY, SIDE CHECK

| | | | |
|---|---|---|---|
| P. A. USAF - 71<br>Other Cust<br>Navy - AS<br>Army - AV<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR - STD-14/97 | TITLE<br>VALVE ASSEMBLY, EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7560 | SUPERSEDES: USAF DWGS 44A25094, 51A24468, 51A24469, 53A3730, 51A24470 | | SHEET 4 OF 11 |

APPROVED 18 NOV 68 REVISION Ⓔ FOR CHANGES SEE SHEET 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

DD FORM 1 MAY 61 672-1 (CONTINUATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32 x 9-3/4. PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE ON 8 x 10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE ON 8 x 10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8 x 10-1/2 SHEET.

DATE
DRAWN BY ____________ ______
TYPED BY ____________ ______
CHECKED BY ____________ ______

FED. SUP CLASS
4820

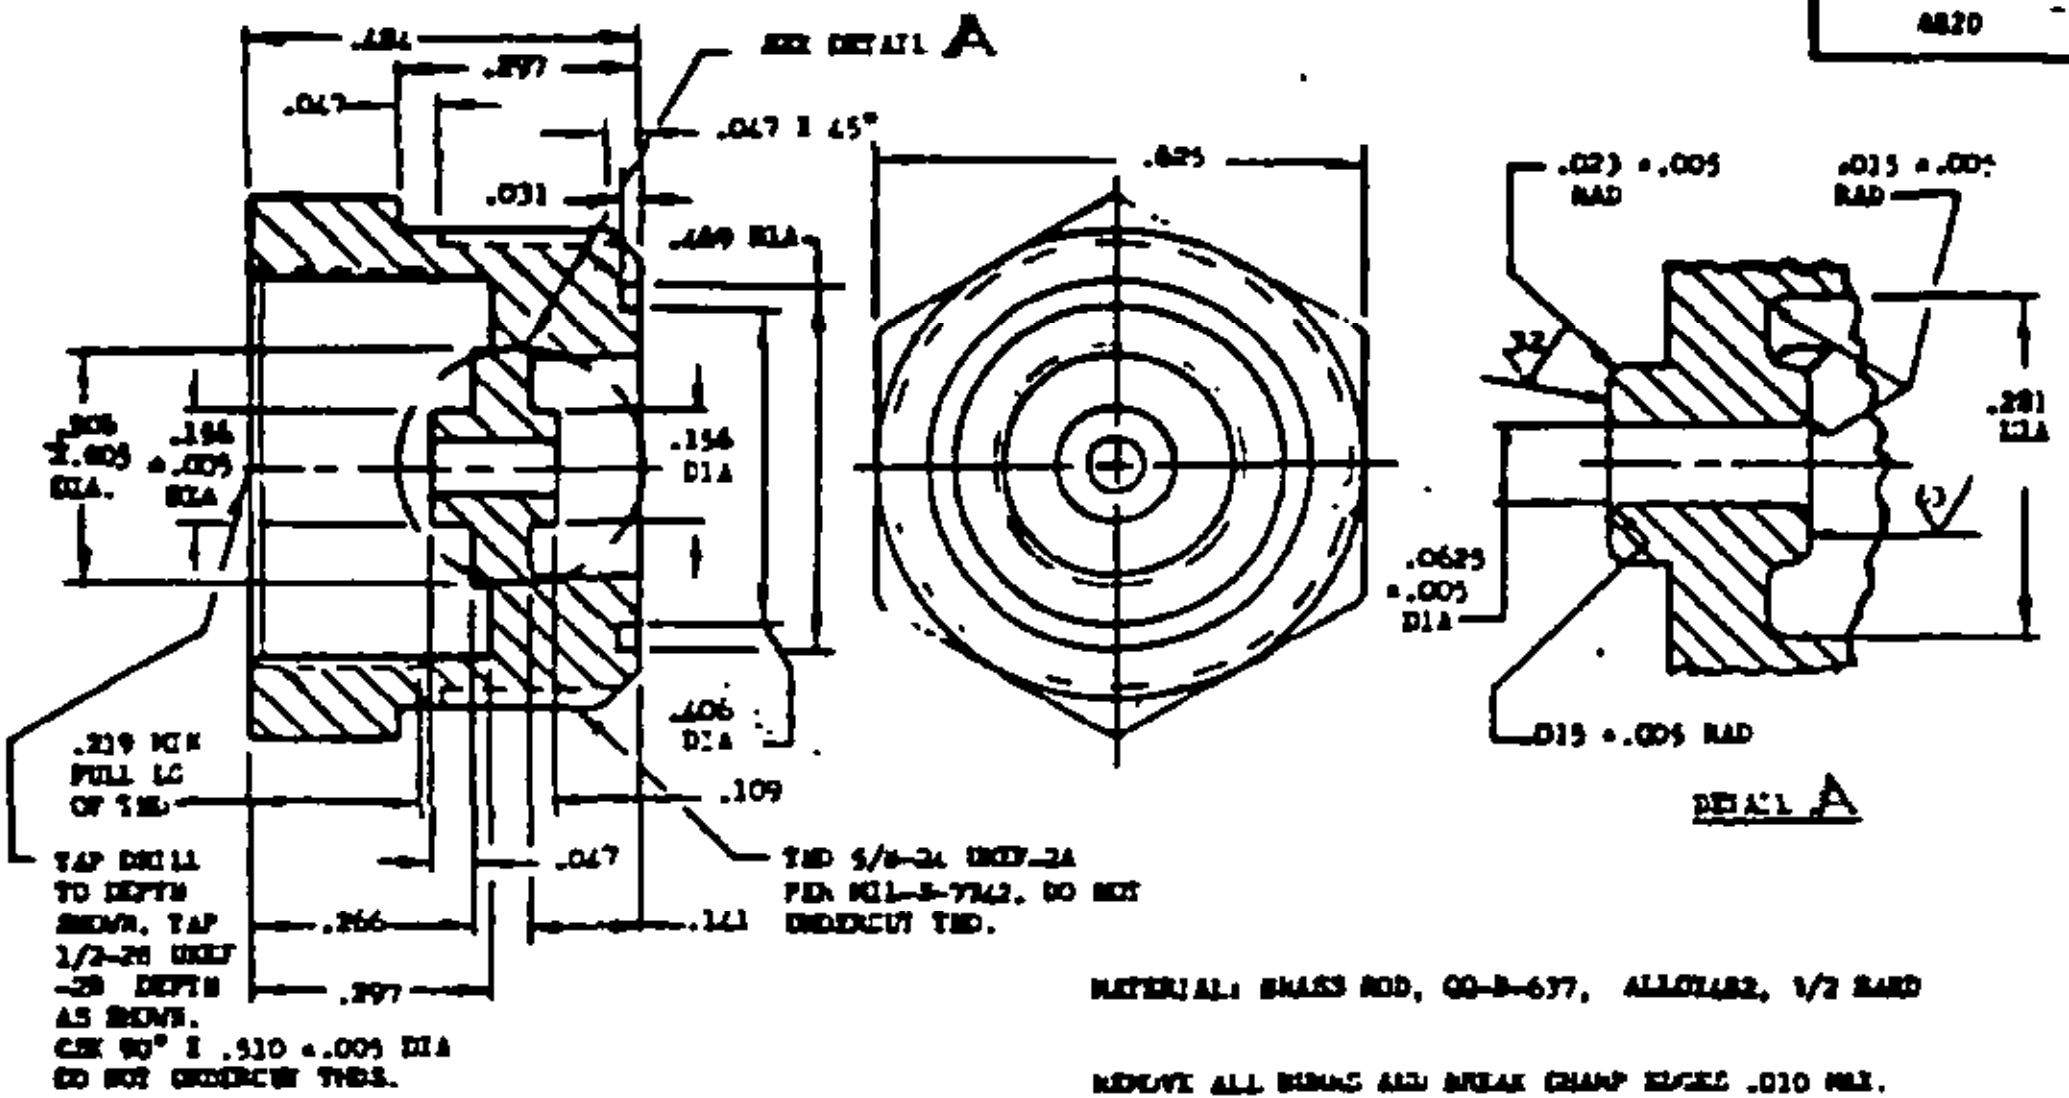

.484
.297
.047
.031
SEE DETAIL A
.047 X 45°
.469 DIA
.625
.156 DIA
.305 ±.005 DIA.
.156 ±.005 DIA
.406 DIA
.219 MIN FULL LG OF THD
.109
TAP DRILL TO DEPTH SHOWN, TAP 1/2-20 UNEF -2B DEPTH AS SHOWN. CSK 90° X .510 ±.005 DIA DO NOT UNDERCUT THDS. THDS. PER MIL-S-7742
.047
.266
.297
.141
THD 5/8-24 UNEF-2A PER MIL-S-7742. DO NOT UNDERCUT THD.
.023 ±.005 RAD
.015 ±.005 RAD
32
.281 DIA
.0625 ±.005 DIA
.015 ±.005 RAD
DETAIL A

MATERIAL: BRASS ROD, QQ-B-637, ALLOY482, 1/2 HARD

REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX.
UNLESS SPECIFIED, TOLERANCES:
DECIMALS ±.016, ANGLES ±1°.

BUSHING, SIDE CHECK

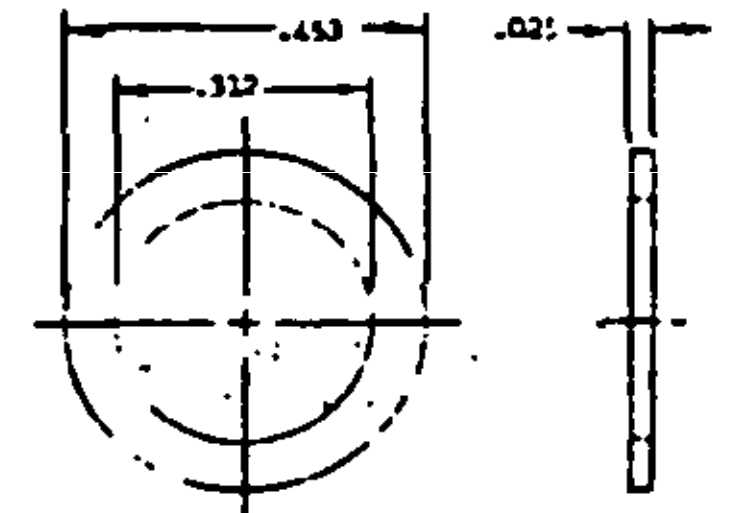

MATERIAL: COPPER, QQ-C-576, SOFT SHEET-STOCK.
REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.
TOLERANCES ±.005

-10

GASKET, BUSHING, SIDE CHECK



.1875 +.002 -.000 DIA
.125±.010

MATERIAL:
POLYTRIFLOUROCHLOROETHYLENE,
(UNPLASTICIZED) AMS3646.
DIMENSIONS IN INCHES.

SEAL, SIDE CHECK

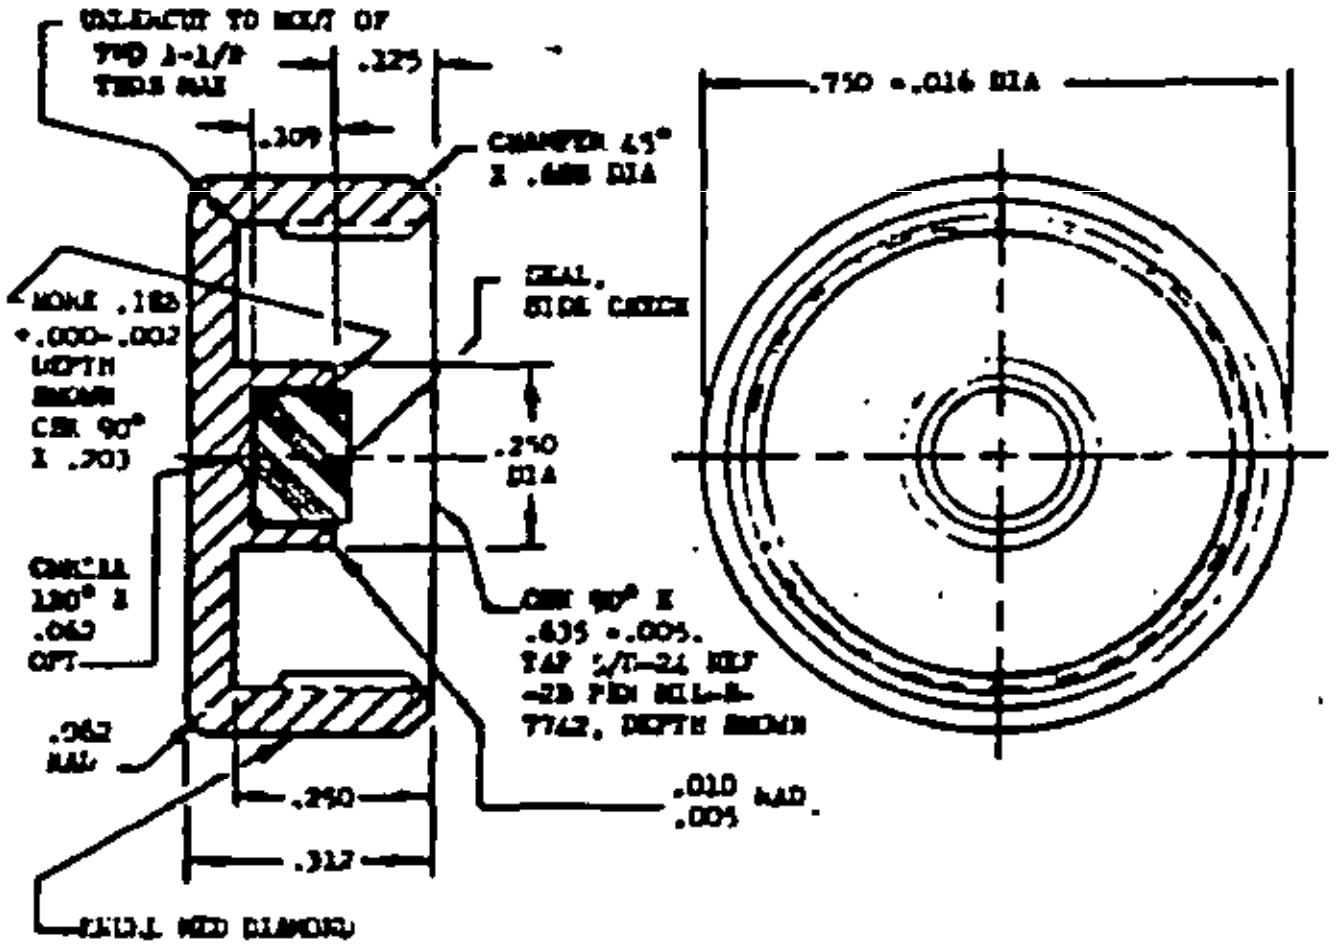

UNDERCUT TO MAX OF TWO 1-1/2 THDS MAX
.325
.309
CHAMFER 45° X .688 DIA
.750 ±.016 DIA
NONE .188 +.000-.002 DEPTH SHOWN CSK 90° X .203
SEAL, SIDE CHECK
.250 DIA
CHCIAL 120° X .062 OPT
CSK 90° X .635 ±.005. TAP 5/8-24 UNEF -2B PER MIL-S-7742, DEPTH SHOWN
.062 RAD
.250
.317
.010 .005 RAD
KNURL MED DIAMOND

MATERIAL: BRASS, QQ-B-626, ALLOY 360, 1/2 HARD

REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.

UNLESS SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°

-9

CAP AND SEAL ASSEMBLY, SIDE CHECK

APPROVED 16 NOV 66 REVISED Ⓝ FOR CHANGES SEE SHEET 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P. A. USAF - 71<br>Other Cust<br>Navy - AS<br>Army - AV<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR - STD-14/9F | TITLE<br>VALVE ASSEMBLY,<br>EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7560 | SUPERSEDES: USAF DWGS 44A75096, 44A75100, 53A3516, 53A3517, 53A3518 | | SHEET 5 OF 11 |

DD FORM 672-1 (CONTINUATION) [illegible]

NOTES TO PRINTER [illegible]

DATE

DRAWN BY ____________ ______

TYPED BY ____________ ______

CHECKED BY ____________ ______

FSC CLASS
4820

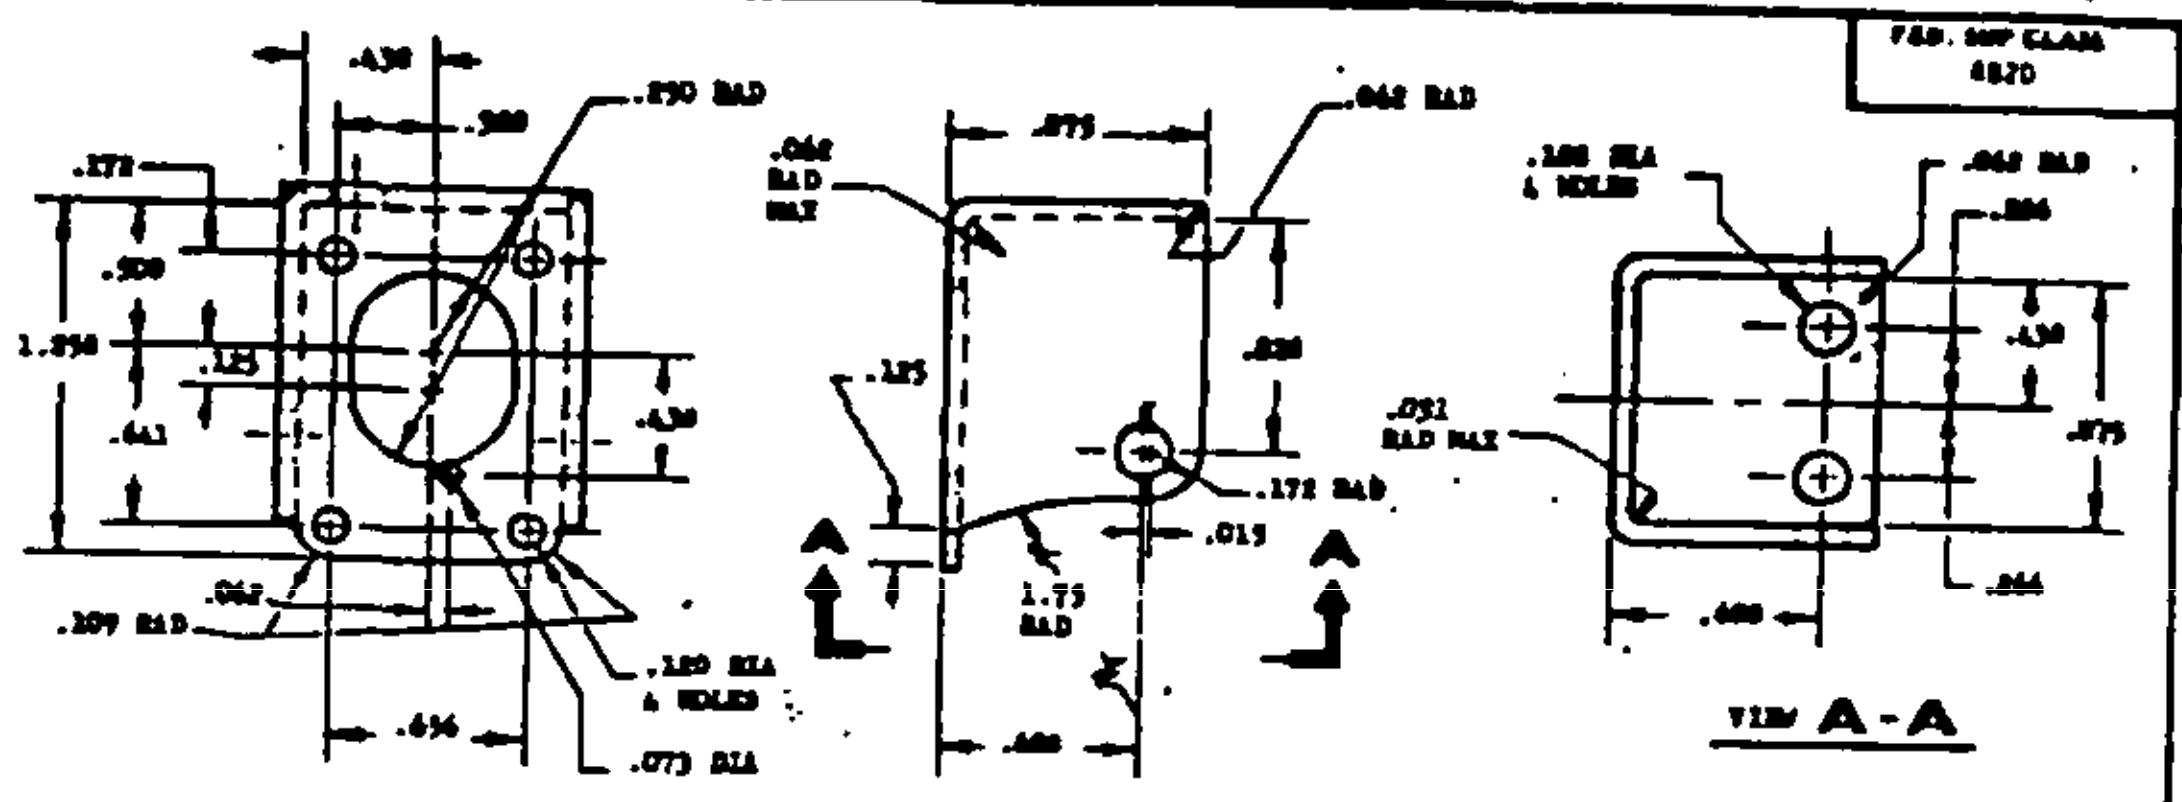

.430
.380
.290 RAD
.172
.500
1.250
.125
.441
.430
.062
.209 RAD
.180 DIA
4 HOLES
.656
.073 DIA
.062 RAD MAX
.875
.062 RAD
.125
.828
.172 RAD
.015
1.75 RAD
.400
A
A
.188 DIA
4 HOLES
.062 RAD
.886
.430
.875
.031 RAD MAX
.400
.844
VIEW A-A

MATERIAL: STEEL, QQ-S-698 OR ½ HARD, NO. 2 TEMPER. .090 THICKNESS.
FINISH: ZINC PLATE, ASTM B633 TYPE I, CLASS I., OPT FINISH; MIL-C-83488, TYPE I OR II
BREAK SHARP EDGES .010 MAX.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS, ± .015, ANGLES ± 1°.

HOUSING

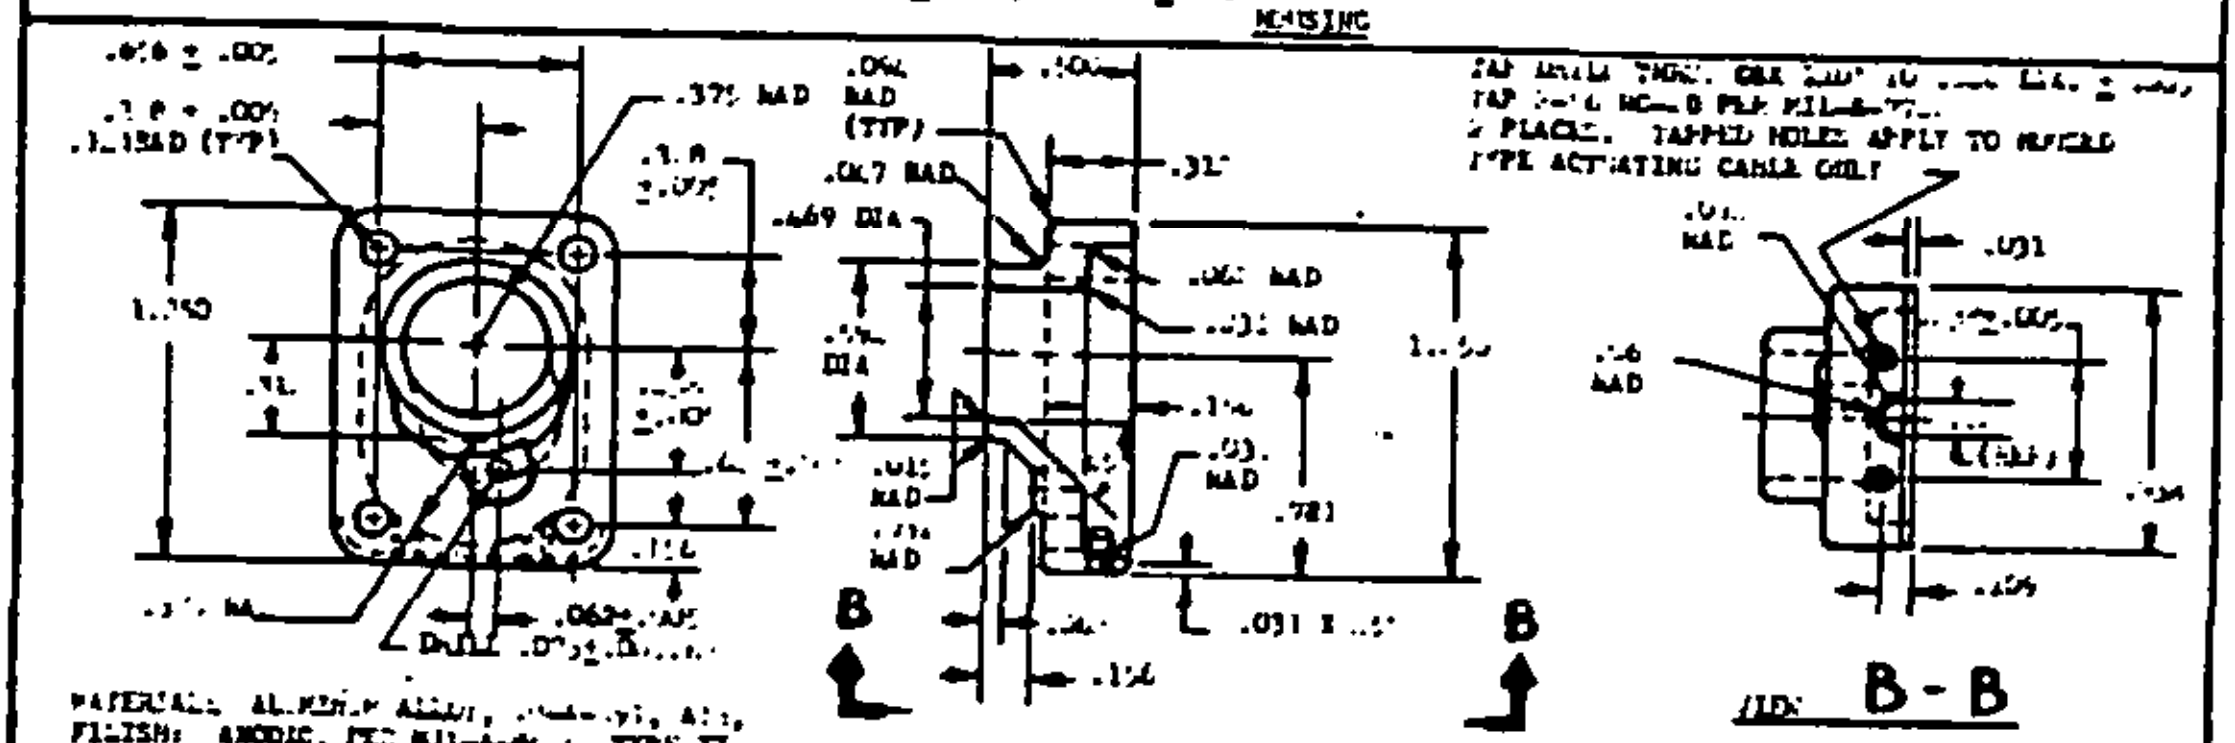

.656 ± .005
.3 8 ± .005
.125RAD (TYP)
.375 RAD
.3 8 ±.005
.094 RAD (TYP)
.500
.047 RAD
.469 DIA
.312
.062 RAD
.031 RAD
1.250
.781
.031 X 45°
.156
B
B
TAP DRILL THRU. CSK
TAP 2-56 NC-2B PER MIL-S-7742
2 PLACES. TAPPED HOLES APPLY TO MANUAL TYPE ACTUATING CABLE ONLY
.031
.156 RAD
.375
.125
DRILL .073 ± .003
.0625 RAD
VIEW B-B

MATERIAL: ALUMINUM ALLOY, QQ-A-591, A13,
FINISH: ANODIC, PER MIL-A-8625, TYPE II
FINISH ALL OVER

REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX.

HOUSING - VALVE PULL RING

UNLESS OTHERWISE SPECIFIED, TOLERANCES:
DECIMALS ± .015, ANGLES ± 1°.

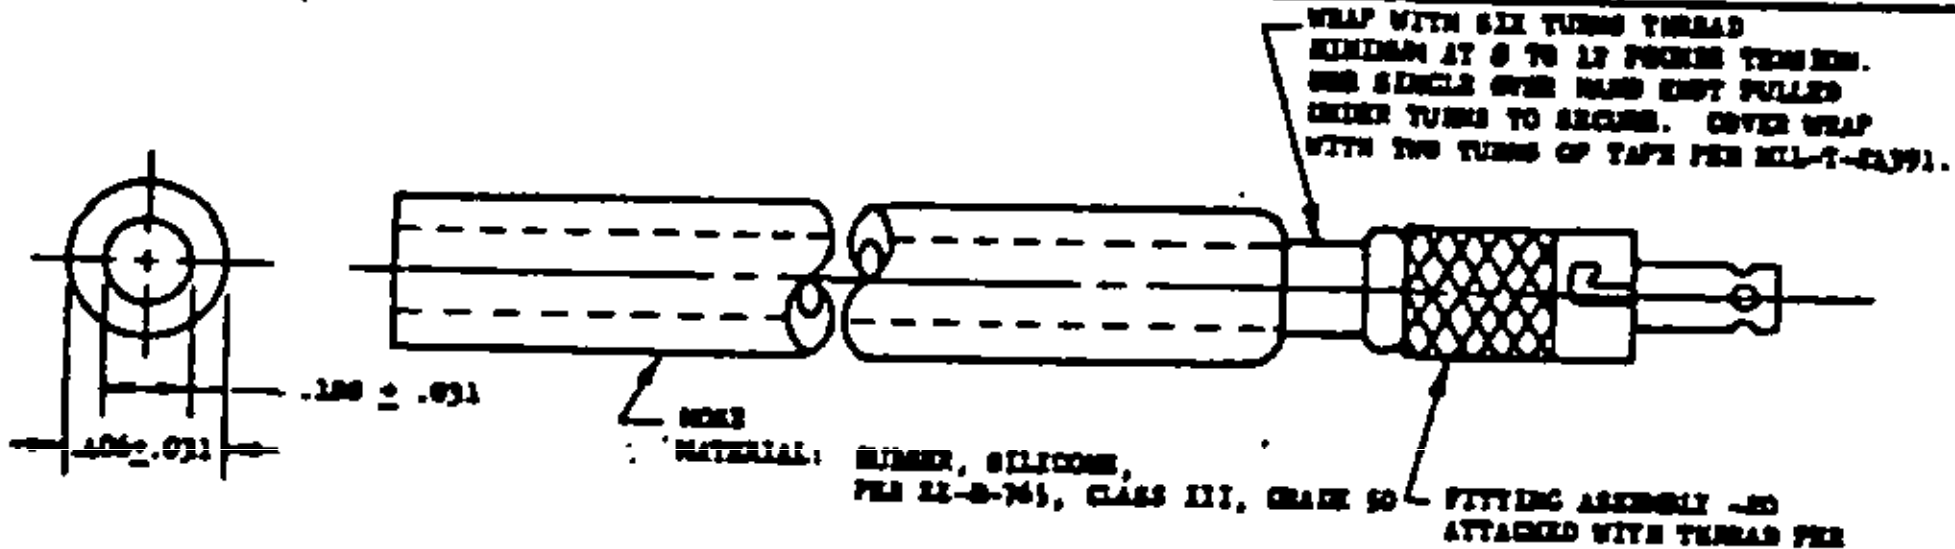

.188 ± .031
.406 ± .031
HOSE

WRAP WITH SIX TURNS THREAD MINIMUM AT 8 TO 12 POUNDS TENSION. USE SINGLE OVER HAND KNOT PULLED UNDER TURNS TO SECURE. COVER WRAP WITH TWO TURNS OF TAPE PER MIL-T-23397.

MATERIAL: RUBBER, SILICONE, PER ZZ-R-765, CLASS III, GRADE 50

FITTING ASSEMBLY -20 ATTACHED WITH THREAD PER V-T-295, SPLY, TYPE 1, CLASS I.

| DASH NO. | HOSE LENGTH PRIOR TO ASSEMBLY L ± .250 |
|---|---|
| -11 | 36 |
| -19 | 30 |

HOSE AND FITTING

| | | | |
|---|---|---|---|
| P A USAF - 71<br>Other Cust<br>NAVY - AS<br>ARMY - AV<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR - STD-14/9F | TITLE<br>VALVE ASSEMBLY, EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7540 | SUPERSEDES:<br>USAF DWGS 44A6795, 43D95030, 57D9800 | | SHEET 6 OF 11 |

DD FORM 1 MAY 71 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 16 NOV 65

REVISED (B) FOR CHANGES SEE SHEET 2

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Submittal for all new engineering and design applications and for repetitive use shall be made from this document

DATE

DRAWN BY

TYPED BY GEORGE A. [illegible] 16 JUL 66

CHECKED BY

NOTES TO PRINTER: [illegible]

FED. SUP CLASS
4820

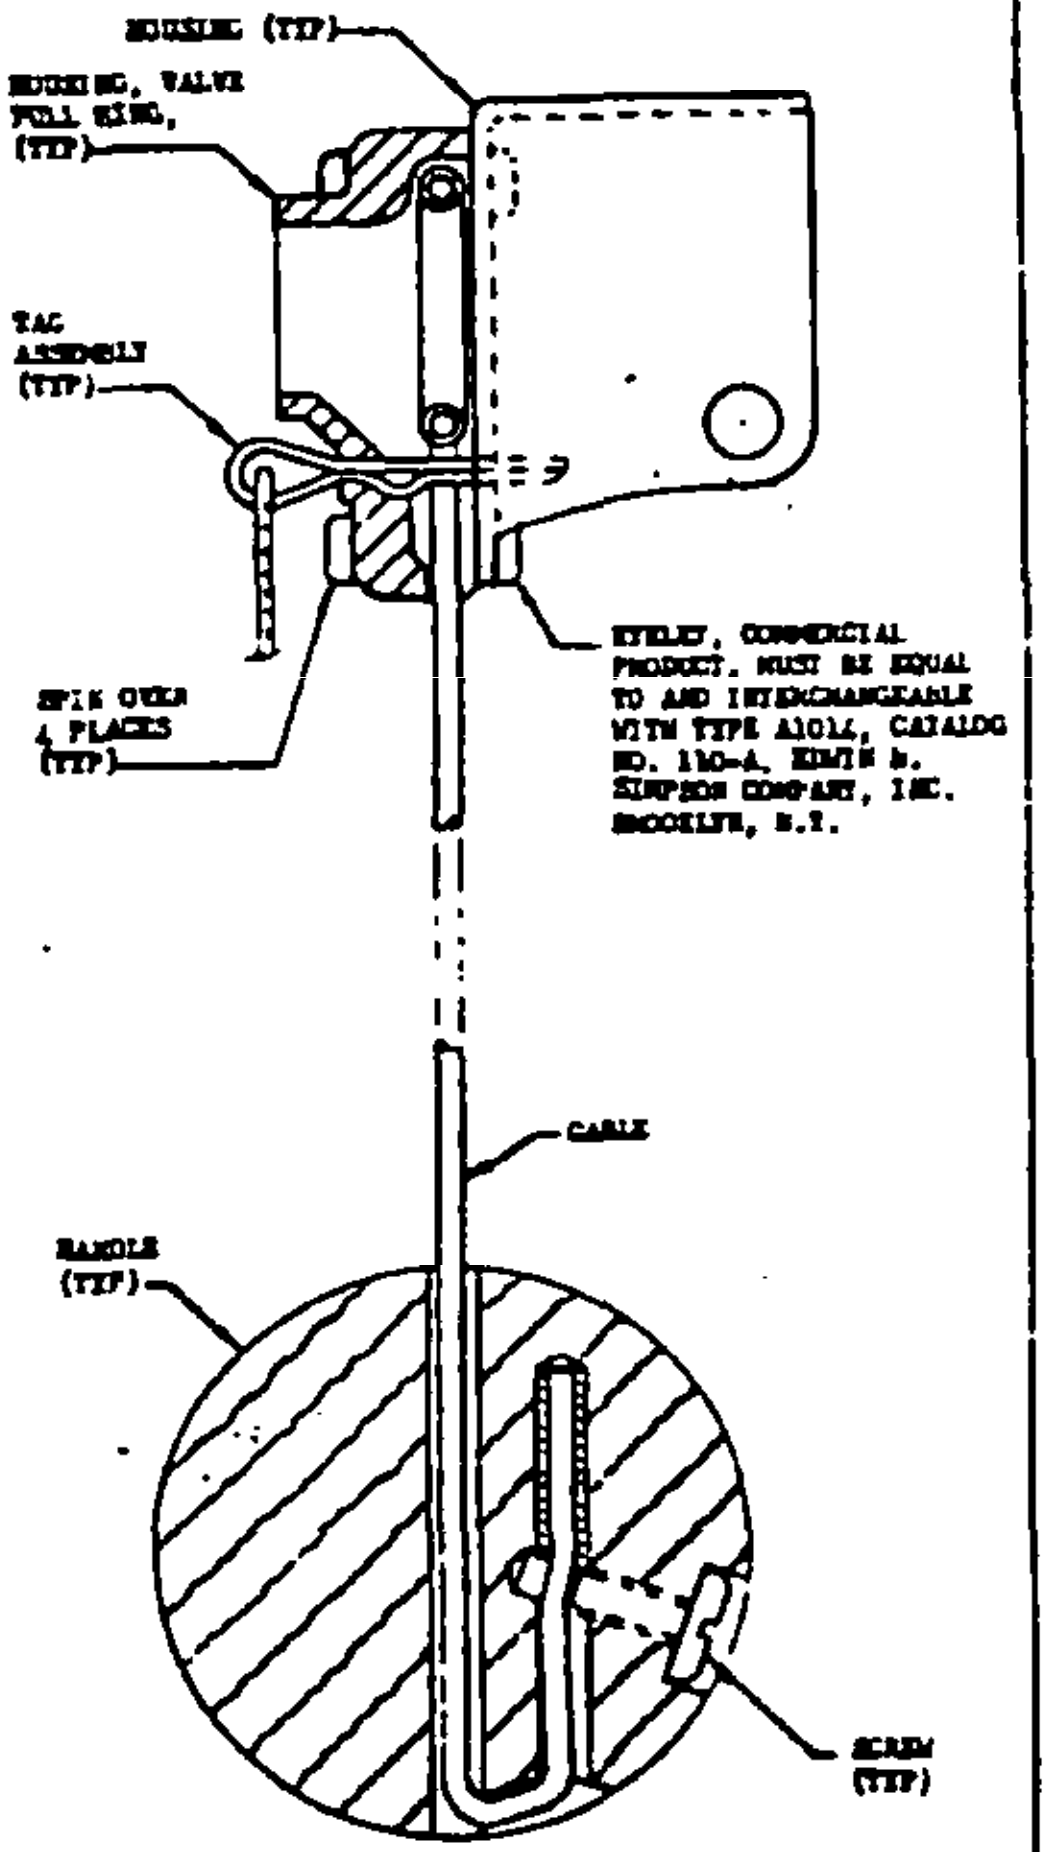
HOUSING (TYP)
HOUSING, VALVE PULL RING, (TYP)
TAG ASSEMBLY (TYP)
SPIN OVER 4 PLACES (TYP)
EYELET, COMMERCIAL PRODUCT. MUST BE EQUAL TO AND INTERCHANGEABLE WITH TYPE A1014, CATALOG NO. 110-A, EDWIN B. SIMPSON COMPANY, INC. BROOKLYN, N.Y.
CABLE
HANDLE (TYP)
SCREW (TYP)

-13 6 INCHES

-14 16.85 INCHES

HOUSING, PULL CABLE, ASSEMBLY
OPEN TYPE

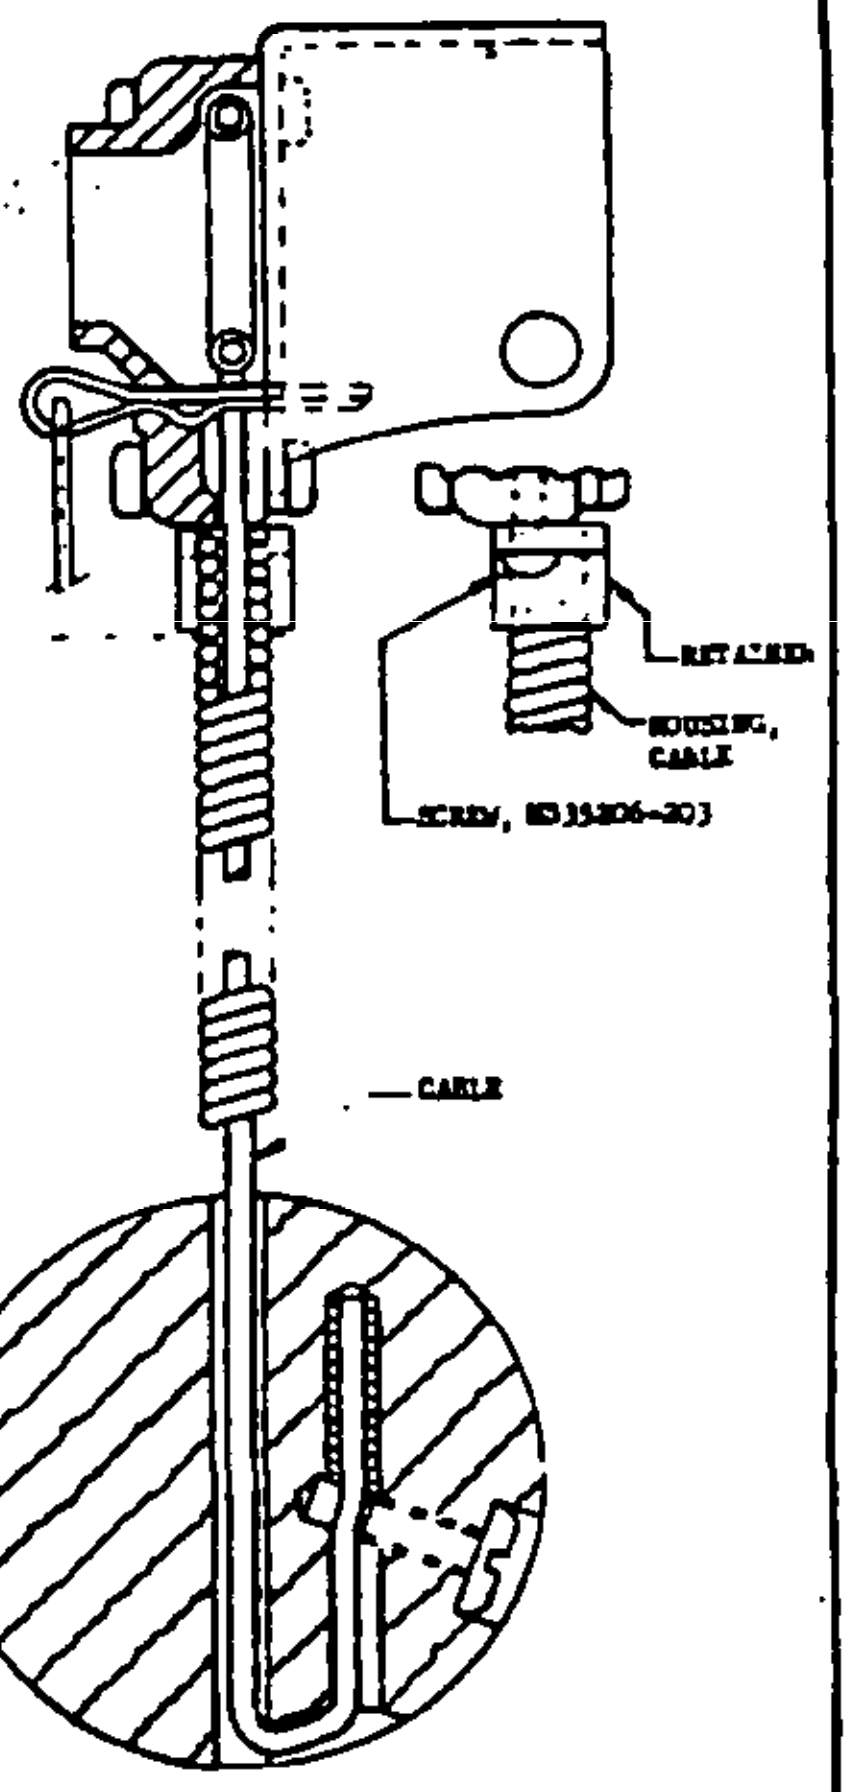
RETAINER
HOUSING, CABLE
SCREW, MS35206-203
CABLE

-15

HOUSING, PULL CABLE, ASSEMBLY
HOUSED TYPE

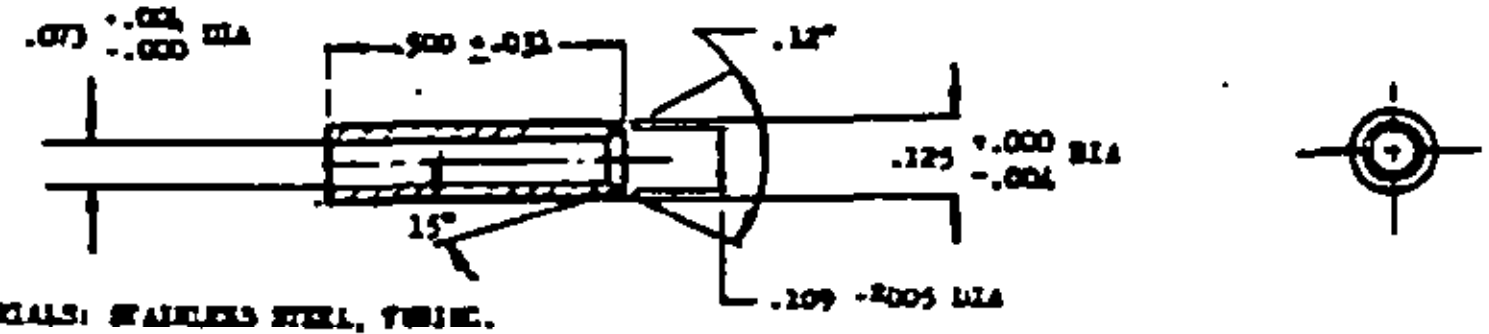
.073 +.004 -.000 DIA
.500 ±.031
.12°
15°
.125 +.000 -.004 DIA
.209 +.005 DIA

MATERIALS: STAINLESS STEEL, TUBING.
IN ACCORDANCE WITH MIL-T-8504.
REMOVE ALL BURRS AND BREAK SHARP EDGES .020 MAX. RAD.
TOLERANCE FOR ANGLES ±1°

TERMINAL, CABLE END

| | | | |
|---|---|---|---|
| P. A. USAF - 71<br>Other Cust<br>Navy - AS<br>Army - AV<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR - STD-14/9F | TITLE<br>VALVE ASSEMBLY,<br>EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL - V 7560 | SUPERSEDES: USAF DWGS 5943772, 6183589, 6783805 | | SHEET 7 OF 11 |

APPROVED 18 NOV 68 REVISED (A) FOR CHANGES SEE SHEET 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

DD FORM 1 MAY 71 672-1 (COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE

DRAWN BY

TYPED BY

CHECKED BY

NOTES TO PRINTER: REDUCE BORDER TO 6 - 77 X 8 - 3/4 [illegible]
BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10 - 1/2 SHEET [illegible]
BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10 - 1/2 SHEET
SIGNATURE FORM NOT TO BE INCLUDED ON 8 X 10 - 1/2 SHEET

FED. SUP CLASS
4820

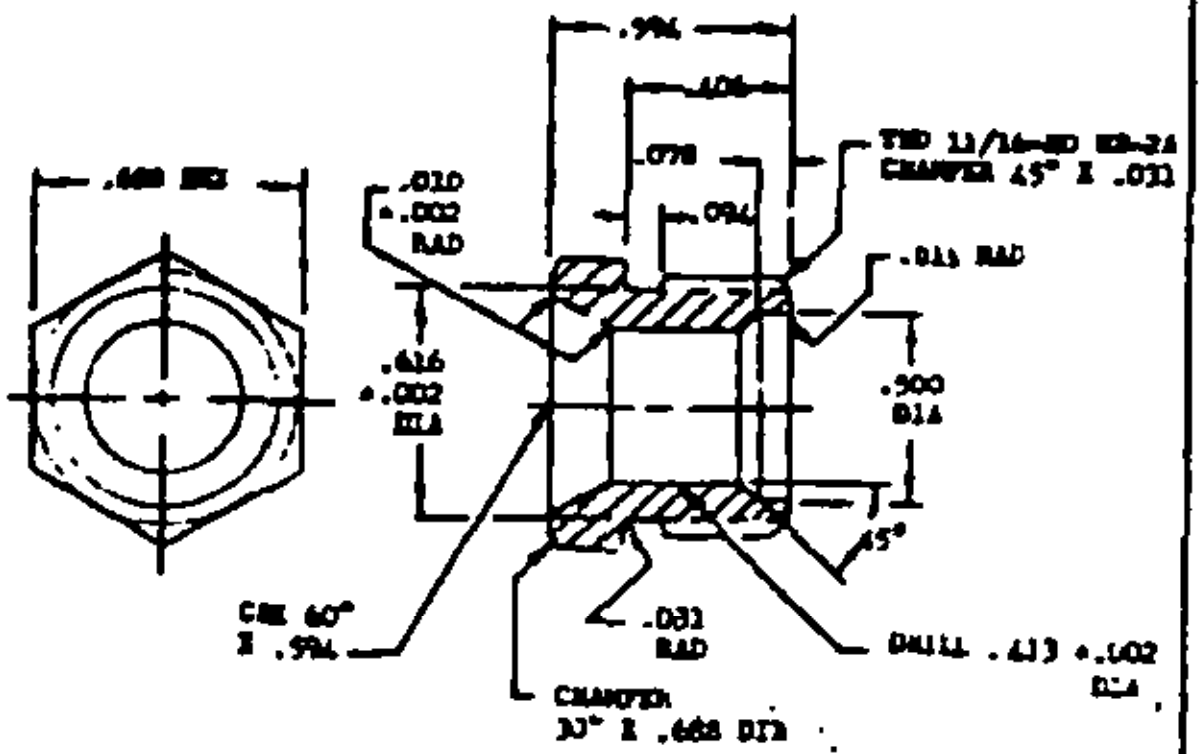
.996
.406
.078
.094
THD 11/16-20 UN-2A
CHAMFER 45° X .031
.010
±.002
RAD
.015 RAD
.688 HEX
.616
±.002
DIA
.500
DIA
45°
CSK 60°
X .996
.031
RAD
DRILL .413 ±.002
DIA
CHAMFER
30° X .688 DIA

MATERIAL: BRASS, QQ-B-626, ALLOY 360, 1/2 HARD
REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.
UNLESS SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°

-16
BUSHING, NIPPLE

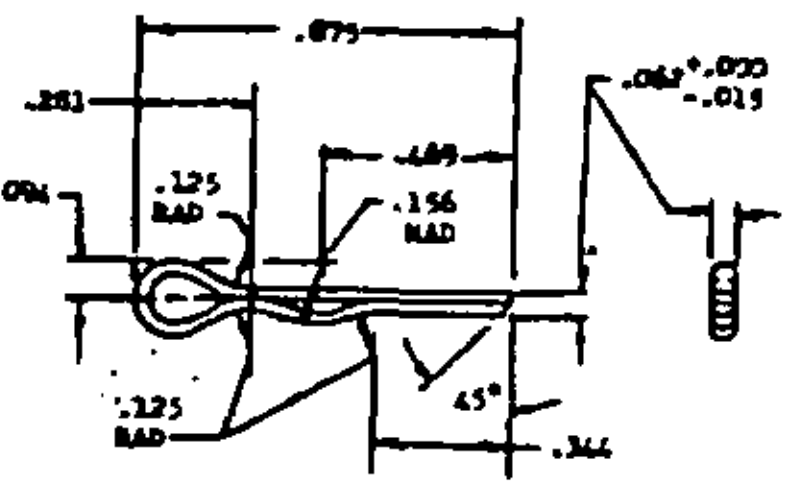
.875
.281
.062 +.000
-.015
.094
.125
RAD
.489
.156
RAD
.125
RAD
45°
.344

MATERIAL: WIRE, STEEL ALLOY, QQ-W-412, COMP 1,
TYPE I.
OPTIONAL MATERIAL: COMMERCIAL STD OR EQUAL,
AISI 3140, SPRING TEMPERED.
FINISH: MIL-C-83488, TYPE I OR II
OPTIONAL FINISH: ZINC PLATE, ASTM B633,-
TYPE I, CLASS I.

UNLESS OTHERWISE SPECIFIED
TOLERANCES: DECIMALS ±.025, ANGLES ±1°.

RETAINING PIN, CAUTION TAG

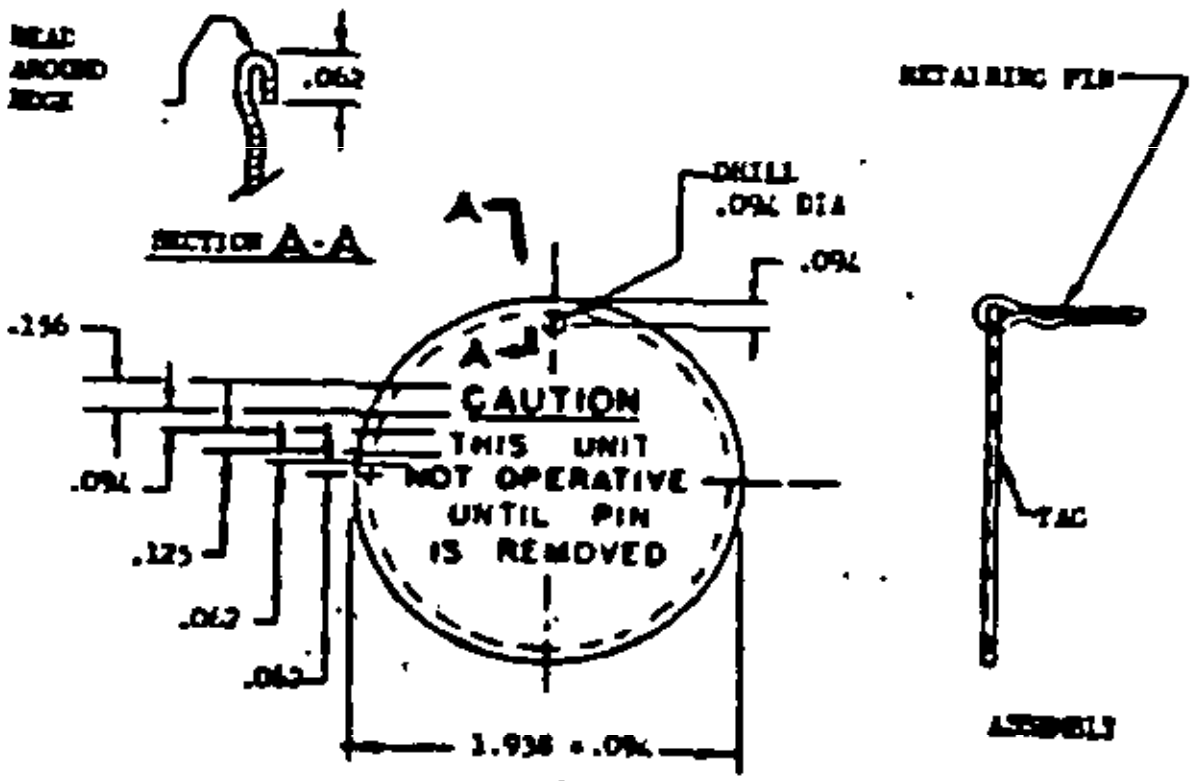
BEAD
AROUND
EDGE
.062
SECTION A-A
A
RETAINING PIN
DRILL
.094 DIA
.094
.156
A
CAUTION
THIS UNIT
NOT OPERATIVE
UNTIL PIN
IS REMOVED
.094
.125
.062
.062
1.938 ±.094
TAG
ASSEMBLY

MATERIAL: STEEL, MIL-S-7952, COMPOSITION OPTIONAL, THICKNESS .015.
FINISH: RED PAINT BOTH SIDES. LETTERS, YELLOW PAINT ONE SIDE ONLY. PER
TT-E-489, TYPE I.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS
±.031
-17
TAG ASSEMBLY

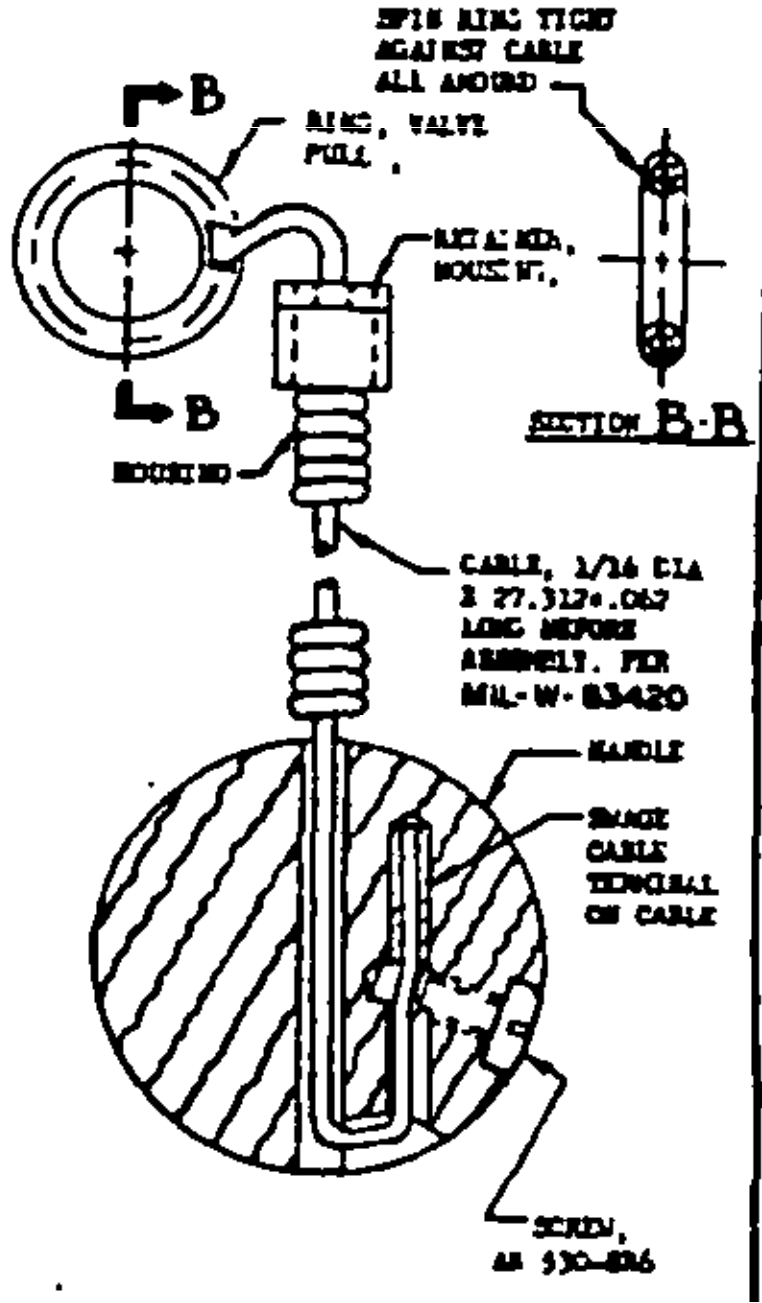
SPIN RING TIGHT
AGAINST CABLE
ALL AROUND
B
RING, VALVE
PULL
RETAINER,
HOUSING
B
HOUSING
SECTION B-B
CABLE, 1/16 DIA
X 27.312±.062
LONG BEFORE
ASSEMBLY. PER
MIL-W-83420
HANDLE
SWAGE
CABLE
TERMINAL
ON CABLE
SCREW,
AN 530-8R6

RING AND GUARD ASSEMBLY,
HOUSED CABLE TYPE

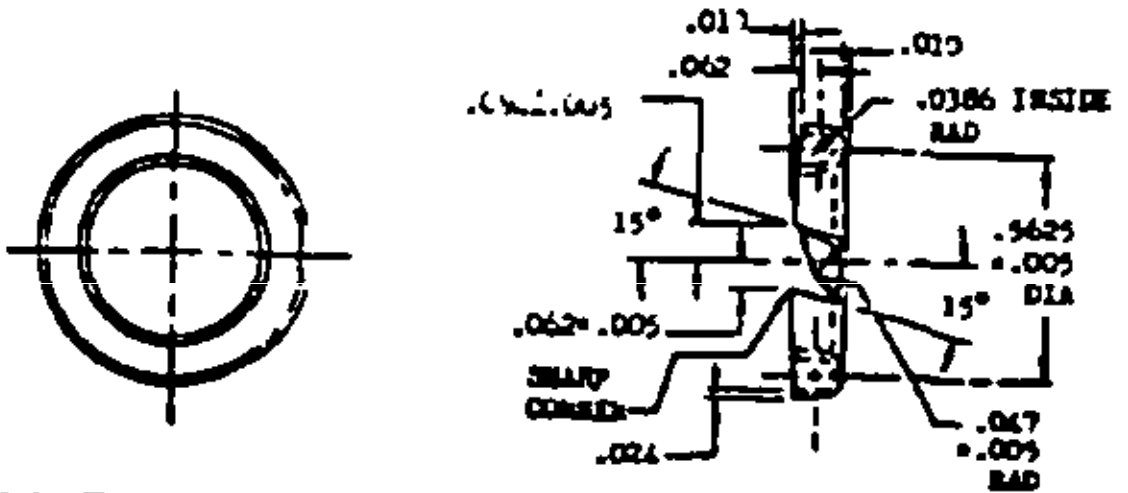
.011
.015
.062
.094±.005
.0386 INSIDE
RAD
15°
.5625
±.005
DIA
15°
.062±.005
SHARP
CORNER
.024
.067
±.005
RAD

MATERIAL: STAINLESS STEEL, MIL-S-6721.
REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS
±.002, ANGLES ±1°.

RING, VALVE PULL

APPROVED 18 NOV 68 REVISED (H) FOR CHANGES SEE SHEET 8

| | | | |
|---|---|---|---|
| P. A. USAF - 71<br>Other Cust<br>Navy - AS<br>Army - AV<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR-STD-14/9F | TITLE<br>VALVE ASSEMBLY,<br>EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7560 | SUPERSEDES: USAF DWGS 59A3772, 43A25034, 43A14323, 43A25032, 57B3806, 43A25078 | | SHEET 8 OF 11 |

DD FORM 1 OCT 71 672-1 (COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

NOTES TO PRINTER: REDUCE DRAWING TO 8-27 32 X 9-3 4. PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10-1 2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10-1 2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8 X 10-1 2 SHEET

DATE
DRAWN BY ____________ ______
TYPED BY ____________ ______
CHECKED BY ____________ ______

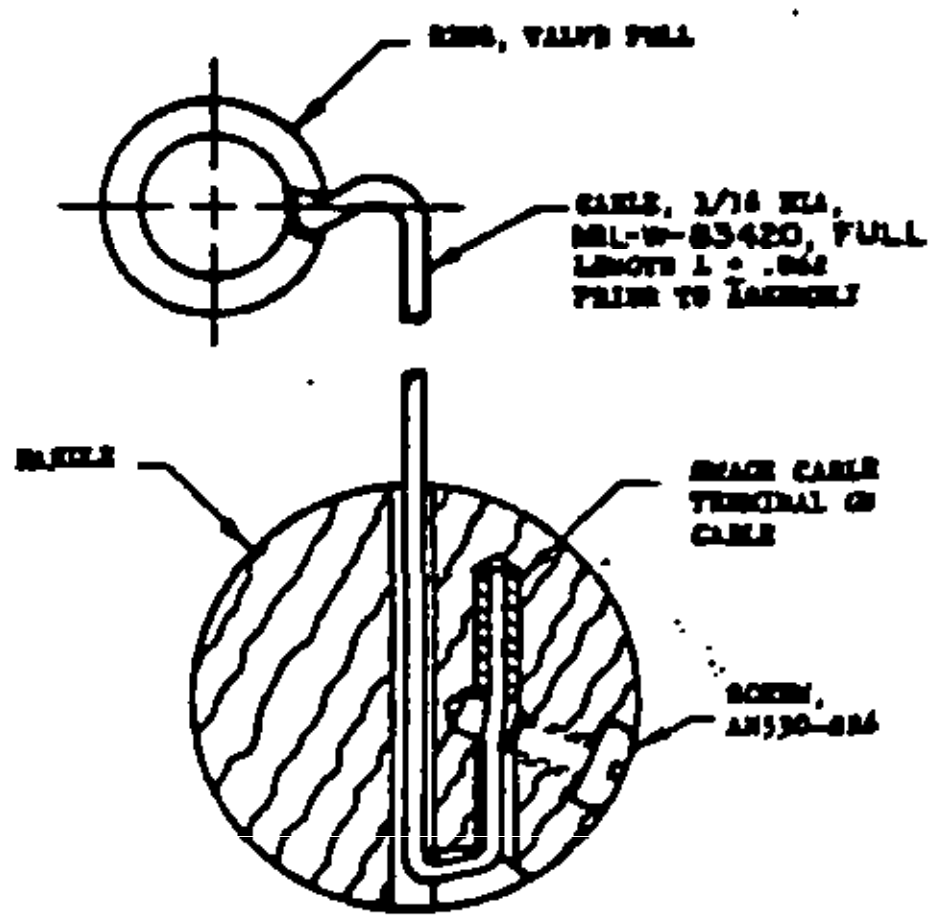
RING, VALVE PULL
CABLE, 1/16 DIA, MIL-W-83420, FULL LENGTH L + .062 PRIOR TO ASSEMBLY
HANDLE
SWAGE CABLE TERMINAL ON CABLE
SCREW, AN530-4R6

| L LENGTH | USED ON DASH NO. |
|---|---|
| 6.000 | -13 |
| 14.250 | -14 |

RING AND GUARD ASSEMBLY, OPEN CABLE TYPE

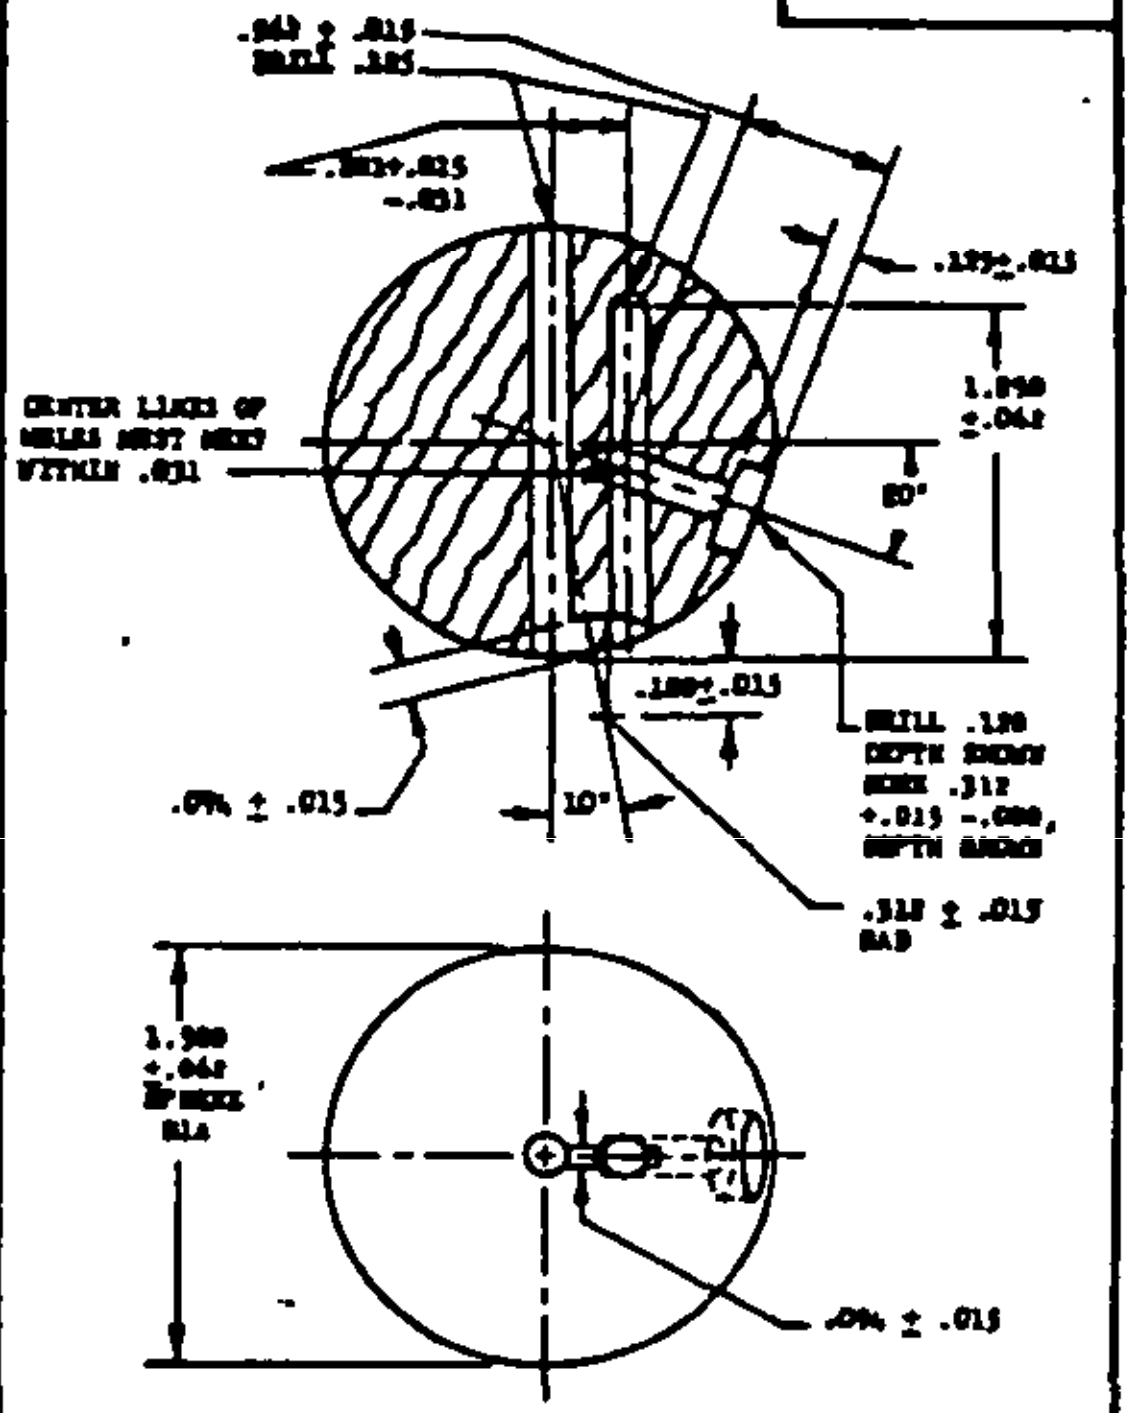
.063 ± .015
DRILL .125
.203 +.025 −.031
.375 ±.015
1.890 ±.062
80°
CENTER LINES OF HOLES MUST MEET WITHIN .031
.180 ±.015
DRILL .120 DEPTH SHOWN C'BORE .312 +.015 −.000, DEPTH SHOWN
.094 ± .015
10°
.312 ± .015 RAD
1.500 ±.062 SPHERE DIA
.094 ± .015

MATERIAL: BIRCH OR MAPLE PER MIL-L-736.
FINISH: GREEN DYE OR LACQUER COMMERCIAL PRODUCT.

UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015, ANGLES ±1°.

HANDLE

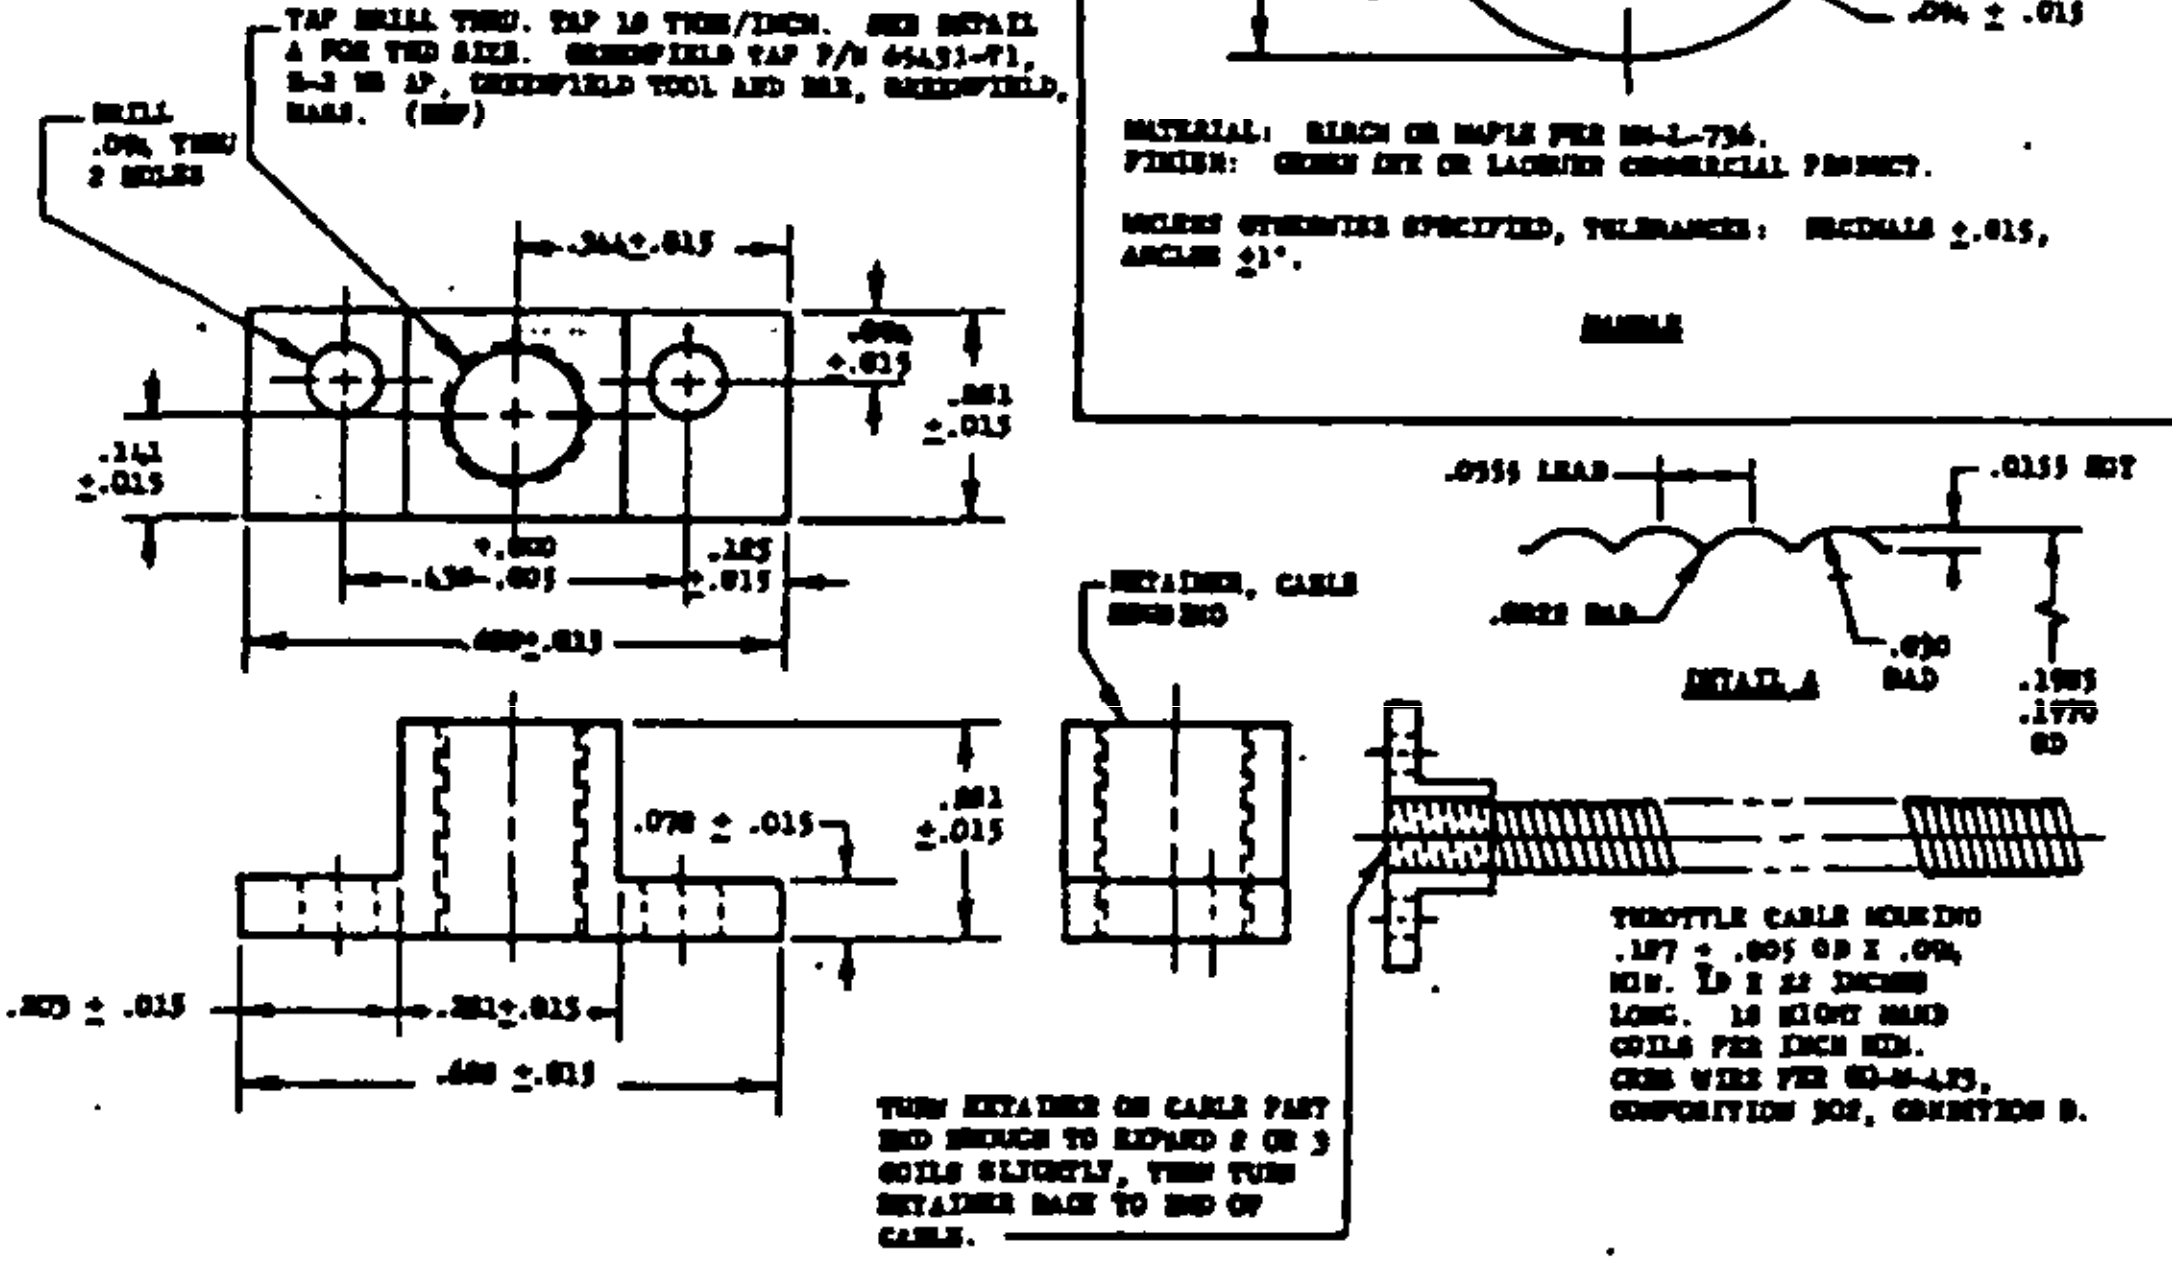
TAP DRILL THRU. TAP 18 THDS/INCH. SEE DETAIL A FOR THD SIZE. GREENFIELD TAP P/N 65431-71, H-3 HS 4P, GREENFIELD TOOL AND DIE, GREENFIELD, MASS. (REF)
DRILL .094 THRU 2 HOLES
.344 ±.015
.094 ±.015
.281 ±.015
.141 ±.015
+.000 .438 −.005
.125 ±.015
.688 ±.015
RETAINER, CABLE HOUSING
.0555 LEAD
.0155 REF
.0022 RAD
.030 RAD
DETAIL A
.1985 .1970 OD
.078 ± .015
.281 ±.015
.500 ± .015
.281 ±.015
.688 ±.015
THROTTLE CABLE HOUSING .187 + .005 OD X .094 MIN. ID X 22 INCHES LONG. 18 RIGHT HAND COILS PER INCH MIN. CRES WIRE PER QQ-W-423, COMPOSITION 302, CONDITION B.
TURN RETAINER ON CABLE PAST END ENOUGH TO EXPAND 2 OR 3 COILS SLIGHTLY, THEN TURN RETAINER BACK TO END OF CABLE.

MATERIAL: RETAINER, ALUMINUM ALLOY, QQ-A-200/3, TEMPER 4.

HOUSING, CABLE AND RETAINER

REVISED (N) FOR CHANGES SEE SHEET 8

APPROVED (REMOVED)

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | | |
|---|---|---|---|
| P. A. USAF - 71<br>Other Cust<br>AF - 99<br>NAVY - AS<br>ARMY - AV | INTERNATIONAL INTEREST<br>ASCC - AIR - STD-14/9? | TITLE<br>VALVE ASSEMBLY, EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7980 | SUPERSEDES:<br>USAF DWGS [illegible] | | SHEET 9 OF 11 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

| | | DATE |
|---|---|---|
| DRAWN BY | | |
| TYPED BY | GEORGE A. [illegible] | [illegible] |
| CHECKED BY | | |

NOTES TO PRINTER: [illegible]

FED. SUP CLASS
4820

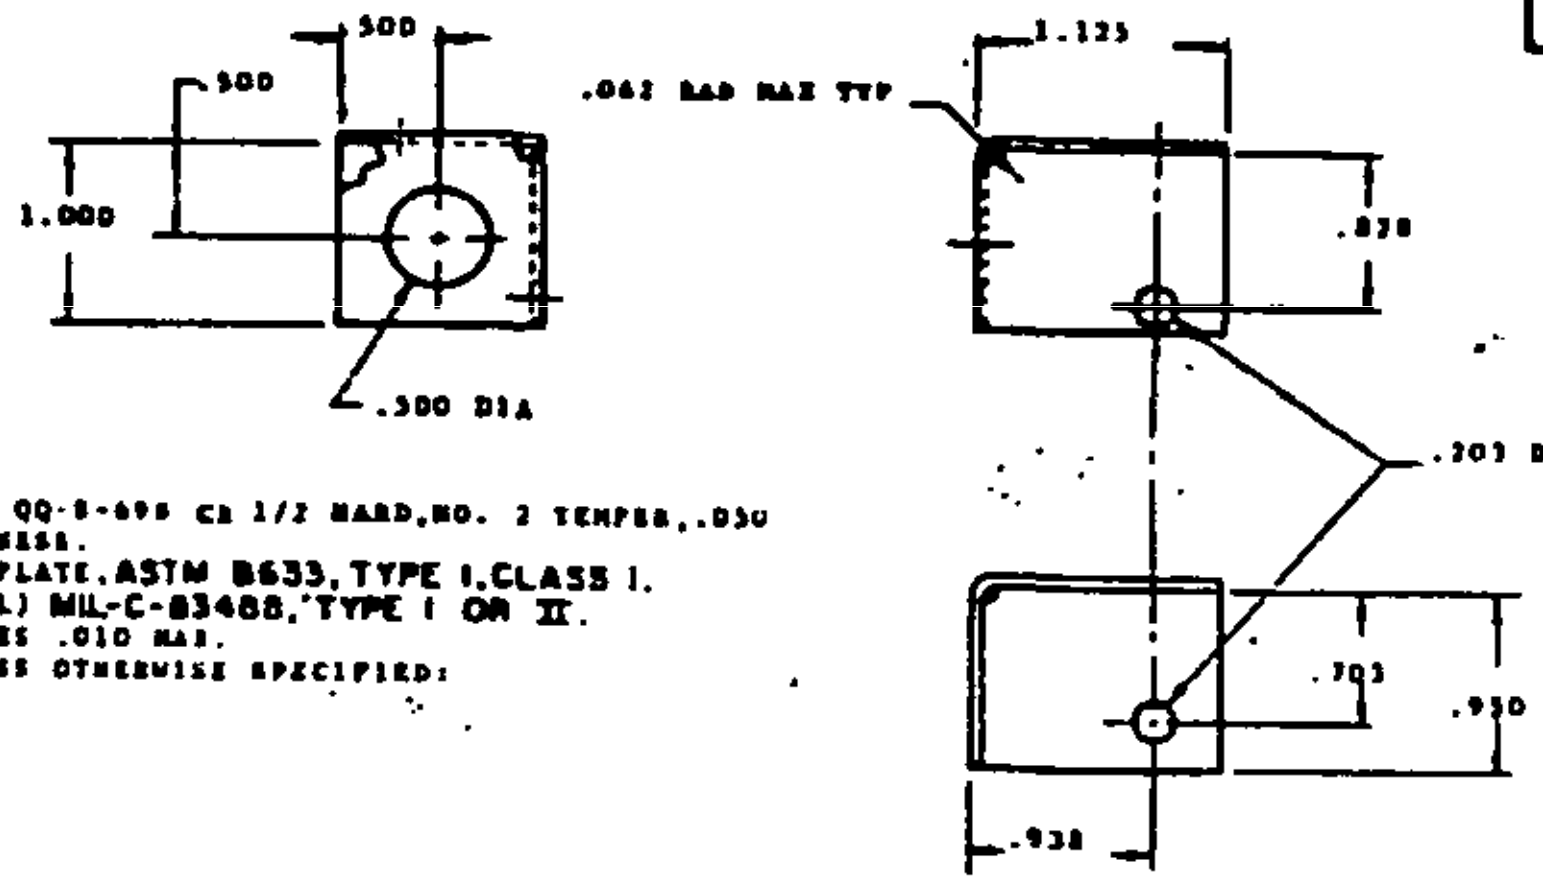

.500
.500
1.000
.500 DIA
.062 RAD MAX TYP
1.135
.878
.203 DIA 2 HOLES
.703
.950
.938

MATERIAL: STEEL QQ-S-698 CR 1/2 HARD, NO. 2 TEMPER, .030 THICKNESS.
FINISH: ZINC PLATE, ASTM B633, TYPE I, CLASS I.
FINISH (OPTIONAL) MIL-C-83488, TYPE I OR II.
BREAK SHARP EDGES .010 MAX.
TOLERANCES UNLESS OTHERWISE SPECIFIED:
DECIMALS ± .015
ANGLES ± 1°

SHIPPING GUARD

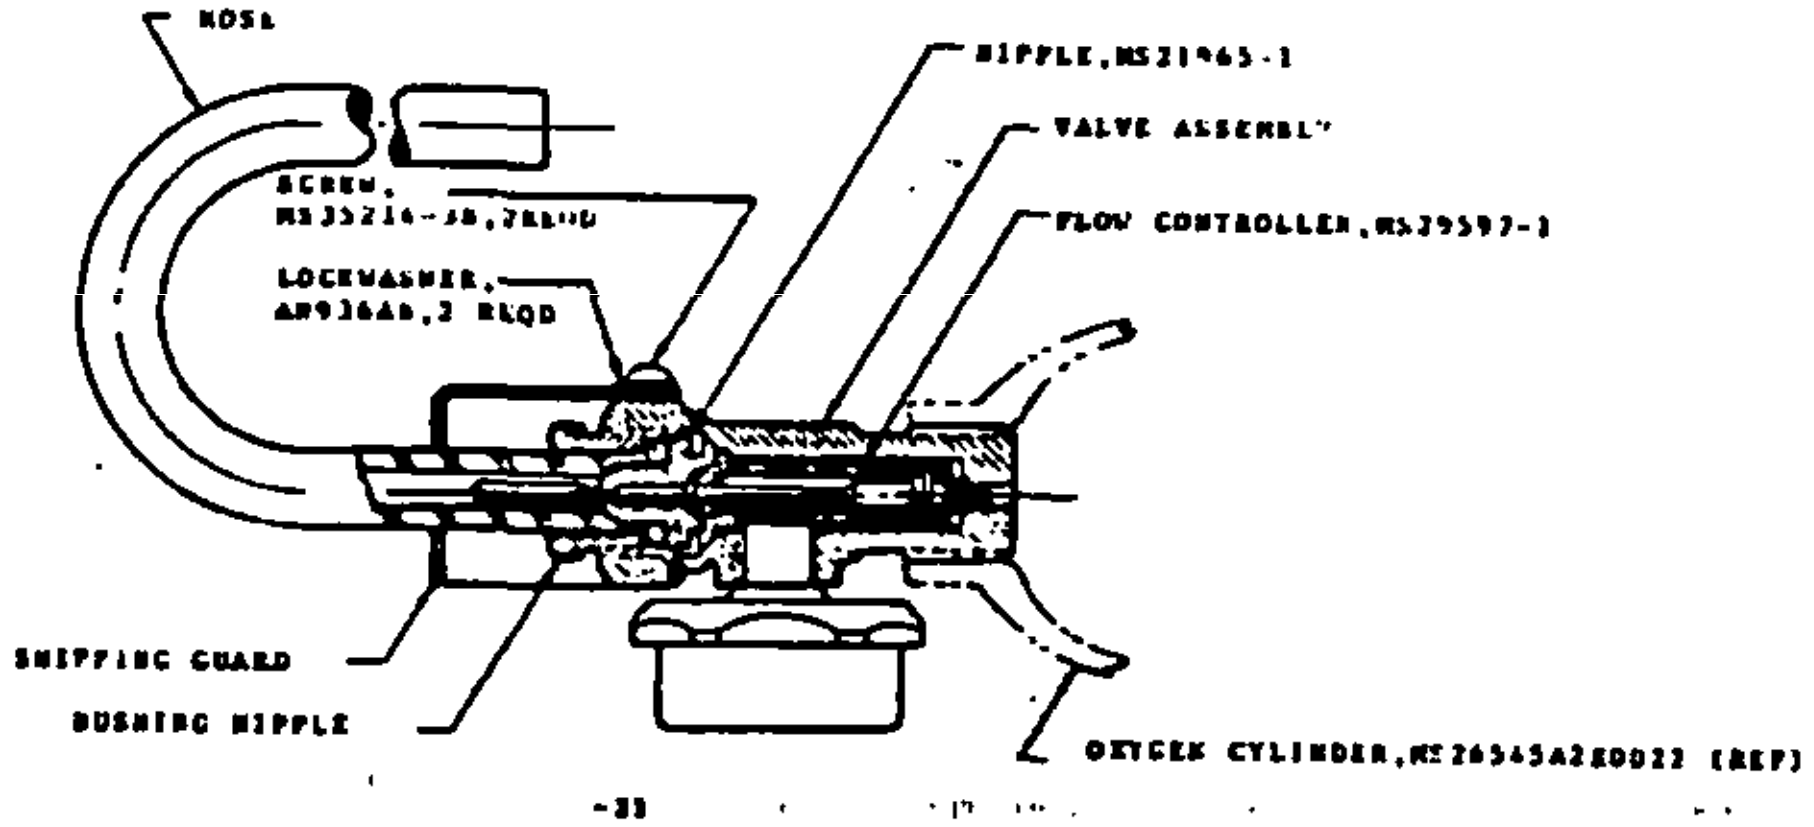

HOSE
NIPPLE, MS21965-1
VALVE ASSEMBLY
FLOW CONTROLLER, MS29597-1
SCREW, MS35214-38, 2 REQD
LOCKWASHER, AN936A6, 2 REQD
SHIPPING GUARD
BUSHING NIPPLE
OXYGEN CYLINDER, MS26545A2E0022 (REF)

-33

VALVE AND HOSE ASSEMBLY

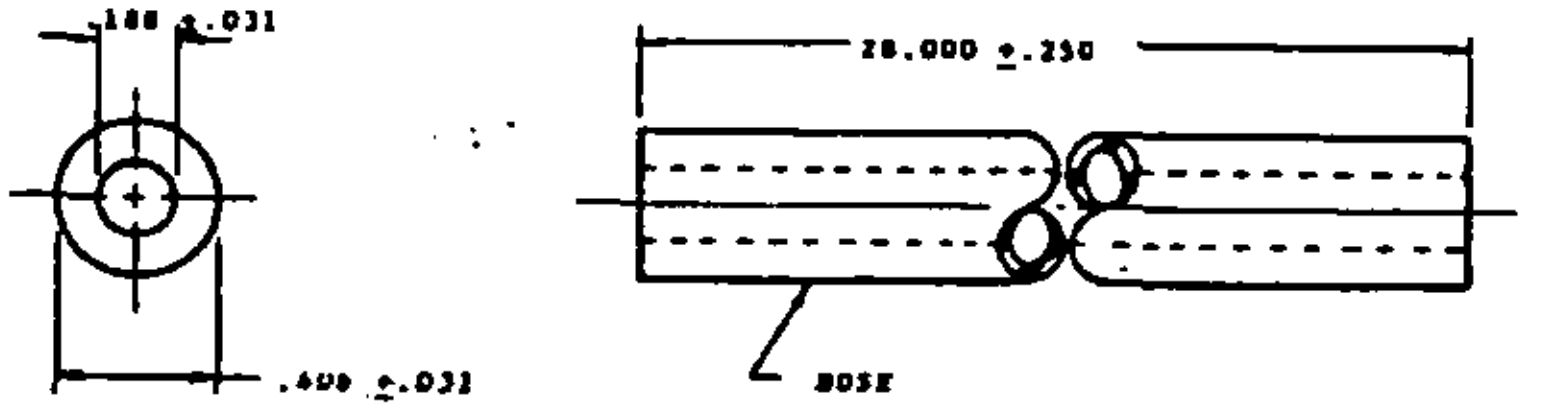

.188 ± .031
.400 ± .032
28.000 ± .250
HOSE

MATERIAL: RUBBER, SILICONE PER ZZ-R-765, CLASS III, GRADE 50

-19

HOSE

REVISED (W) FOR CHANGES SEE SHEET 2

APPROVED 18 NOV 88

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

| | | | |
|---|---|---|---|
| P.A. USAF - 71<br>Other Cust<br>Navy - AS<br>Army - AV<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC - AIR - STD-14/97 | TITLE<br>VALVE ASSEMBLY<br>EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7560 | SUPERSEDES:<br>44A6795, 43B75030, 5763808. | | SHEET 10 OF 11 |

DD FORM 672-1 (CONTINUATION)

DATE

DRAWN BY ____________ ______

TYPED BY ____________ ______

CHECKED BY ____________ ______

NOTES TO PRINTER: REDUCE BORDER TO [illegible]

FED. SUP CLASS 4820

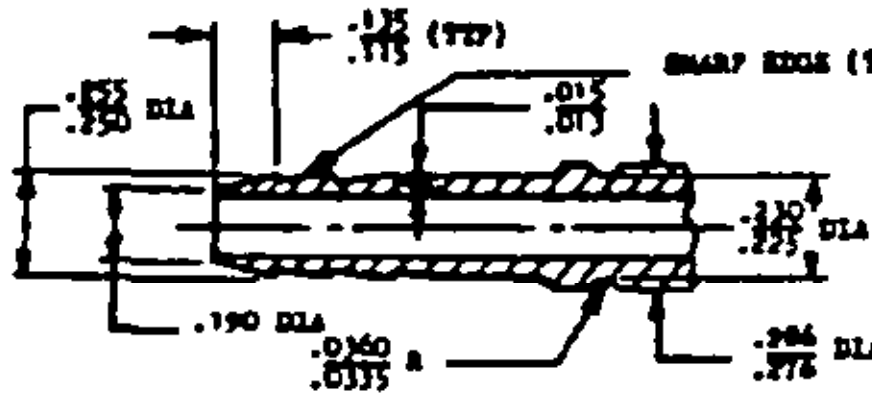
.135
.115 (TYP)
SHARP EDGE (TYP) .010 MAX
.255
.250 DIA
.015
.013
.230
.225 DIA
.190 DIA
.0360
.0335 R
.286
.276 DIA

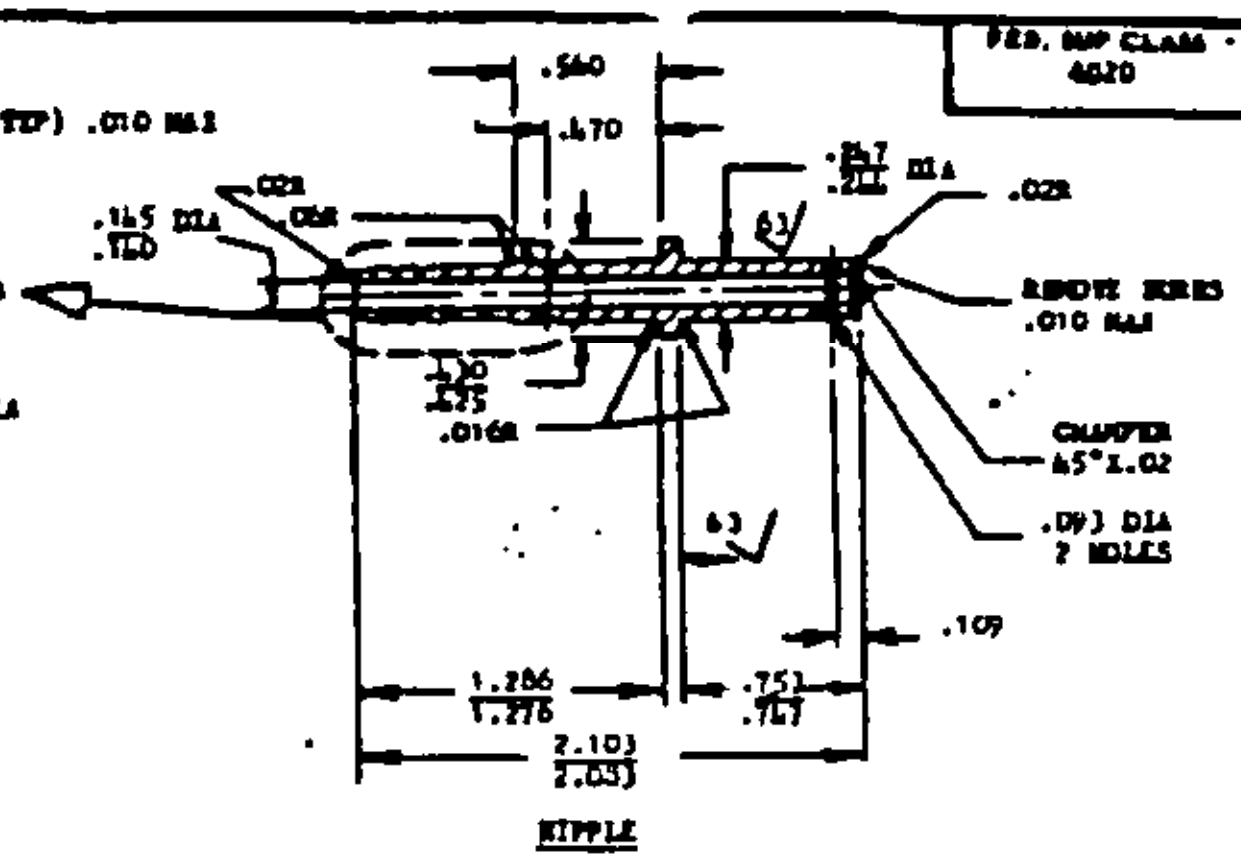
.560
.470
.145 DIA
.140
.02R
.06R
.247
.242 DIA
.02R
63
REMOVE BURRS
.010 MAX
.230
.225
.016R
CHAMFER
45° X .02
.093 DIA
2 HOLES
63
.109
1.286
1.276
.751
.747
2.103
2.033

NIPPLE

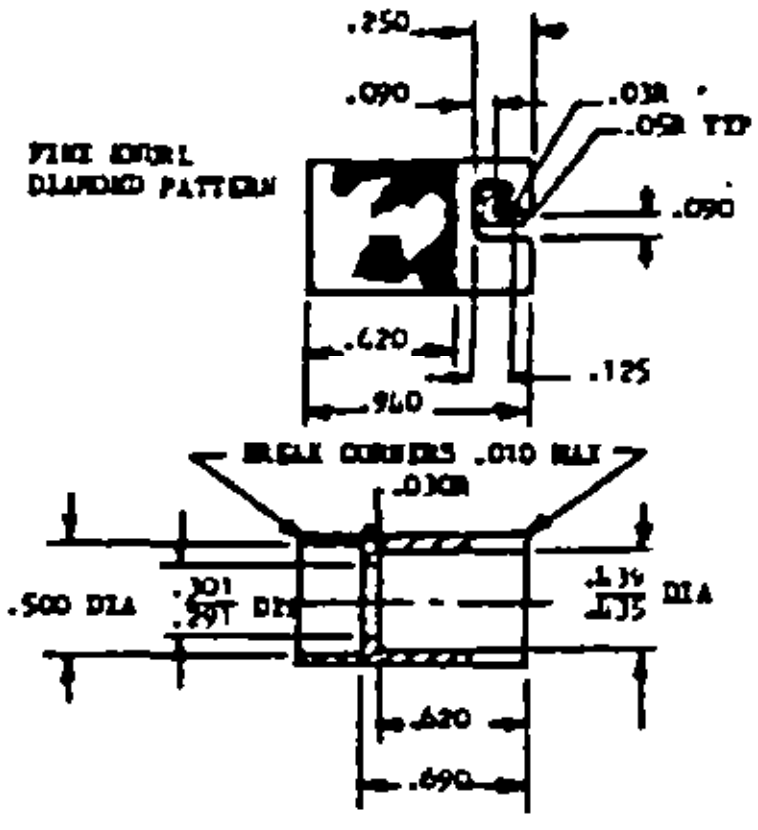
.250
.090
.03R
.05R TYP
FINE KNURL
DIAMOND PATTERN
.090
.420
.940
.125
BREAK CORNERS .010 MAX
.03CR
.500 DIA
.301
.297 DIA
.439
.435 DIA
.420
.690



COLLAR

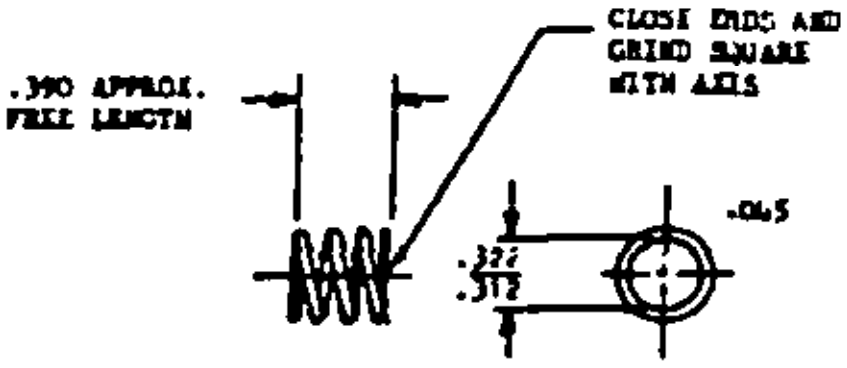
.390 APPROX.
FREE LENGTH
CLOSE ENDS AND
GRIND SQUARE
WITH AXIS
.322
.312
.045

SPRING

4 COILS, 2 ACTIVE, LOAD 6.7 LBS ± .8 LBS WHEN COMPRESSED TO .25 INCH LENGTH. HEAT SPRING 500° F TO 550° F FOR 10 MINUTES AFTER FORMING. FINISH 63 ALL OVER.

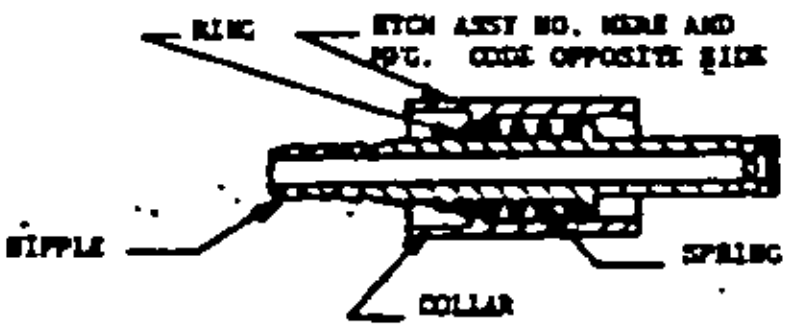
RING
ETCH ASSY NO. NAME AND
MFG. CODE OPPOSITE SIDE
NIPPLE
SPRING
COLLAR

FITTING ASSEMBLY -20


.230
.225
.030
.0641

RING

| | | |
|---|---|---|
| MATERIAL AND FINISH: | SPRING; | STEEL, QQ-W-470. FINISH MIL-C-83488, TYPE I OR II. |
| | RING; | BRASS, QQ-B-626, ALLOY 260, SOFT |
| | NIPPLE; | BRASS, QQ-B-626 NO. 360, 1/2 HARD. |
| | COLLAR; | BRASS, QQ-B-626 NO. 360, 1/2 HARD. |

ASSEMBLY MUST BE CLEAN, FREE FROM OIL AND OTHER FOREIGN MATERIAL.

FINISH 125 ALL OVER IN ACCORDANCE WITH ANSI B46-1-78 UNLESS OTHERWISE SPECIFIED.

APPROVED 16 NOV 68 REVISED (H) FOR CHANGES SEE SHEET 8

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P. A. USAF-71<br>Other Cust<br>ARMY - AV<br>NAVY - AS<br>AF - 99 | INTERNATIONAL INTEREST<br>ASCC-AIR-STD-14/97 | TITLE<br>VALVE ASSEMBLY<br>EMERGENCY OXYGEN CYLINDER | MILITARY STANDARD<br>MS21964 |
| PROCUREMENT SPECIFICATION<br>MIL-V-7960 | SUPERSEDES<br>USAF DWG 7125434 | | SHEET 11 OF 11 |

DD FORM 672-1 (COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE

DRAWN BY ____________ ______

TYPED BY ____________ ______

CHECKED BY ____________ ______

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32 X 9-1/4. PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10-1/2 SHEET