INCH-POUND
MS23006A
10 May 2021
SUPERSEDING
MS23006
28 July 1964

DETAIL SPECIFICATION SHEET

COVER, LIGHT, NAVIGATIONAL AND WARNING, AIRCRAFT

Inactive for new design after 22 September 2006
and is no longer used, except for replacement purposes.

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Comments, suggestions, or questions on this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

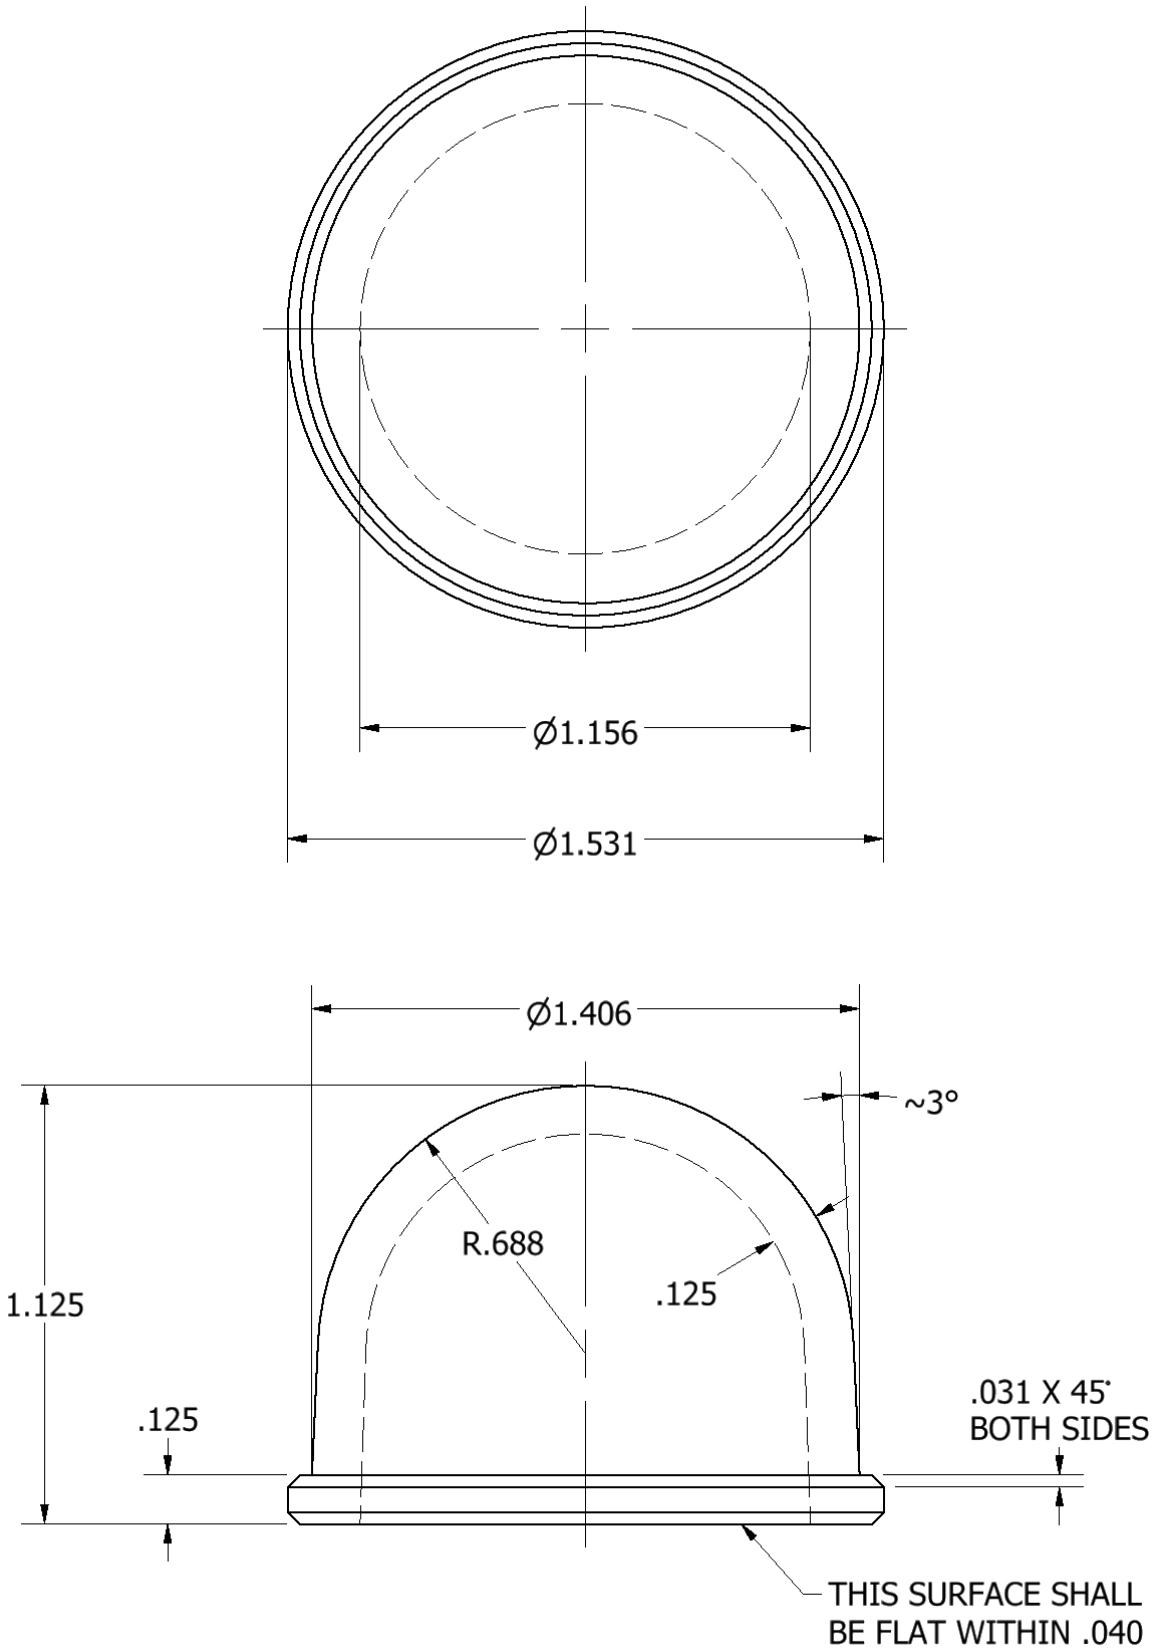


FIGURE 1. Design and Configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

3D Model for reference only.

FIGURE 1. Design and Configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Number

Dash Number	Color[1]	Material Class[1]	Replaces[2]
-1	Aviation White	Diffusing	AN3110-3
-2	Aviation White	Nondiffusing	AN3110-4
-3	Aviation Yellow	Nondiffusing	AN3110-5
-4	Aviation Red	Diffusing	
-5	Aviation Green	Diffusing	

[1] Aviation colors and diffusing/nondiffusing ware shall be in accordance with SAE AS25050.

[2] Dash number -1, -2, and -3 replace and are universally, functionally, and dimensionally interchangeable with AN3110-3, -4, and -5 respectively.

NOTES:

1. Material: See procurement specification (MIL-DTL-7989)
2. The basic MS number shall be marked on the cover. The marking shall be so that it will not interfere with the light distribution.
3. Acceptability of trade-mark shall be determined during preproduction test of cover.
4. Break edges 0.016 maximum.
5. Dimensions in inches. Unless otherwise specified, tolerances: decimals ±0.015 and angles ±1°.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein. Referenced documents shall be of the issue in effect on date of invitations for bid.

Referenced documents. In addition to MIL-DTL-7989, this document references the following: SAE AS25050

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy - AS
Air Force - 71
DLA - GS

Preparing activity:
DLA – GS2

(Project 6220-2021-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.