INCH-POUND
MS25126L
w/Amendment 1
22 August 2018

SUPERSEDING
MS25126L
15 December 2005

DETAIL SPECIFICATION SHEET

SWITCHES, TOGGLE, UNSEALED AND SEALED TOGGLE GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-83731.

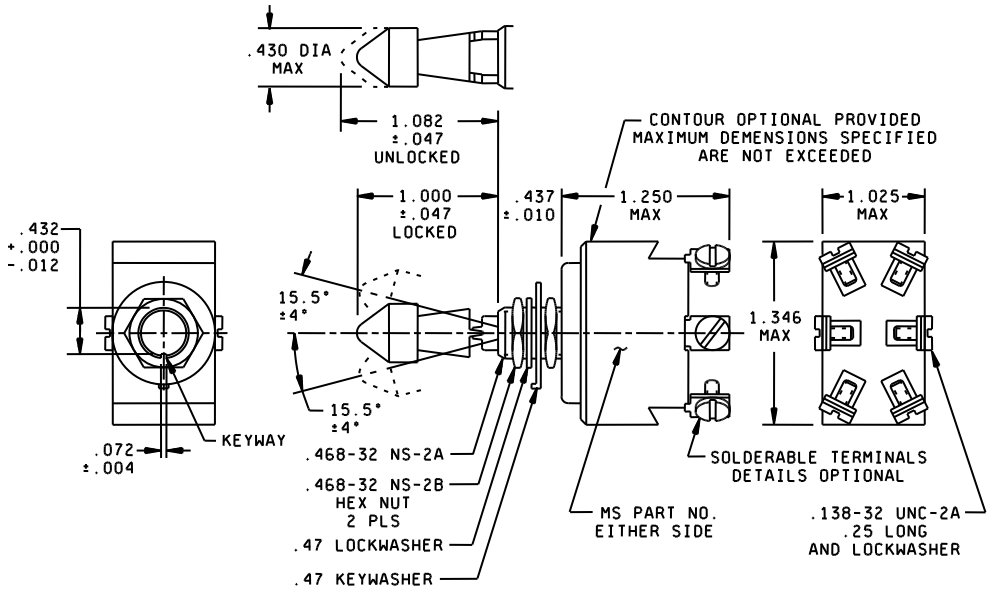


FIGURE 1 Dimensions and configurations

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

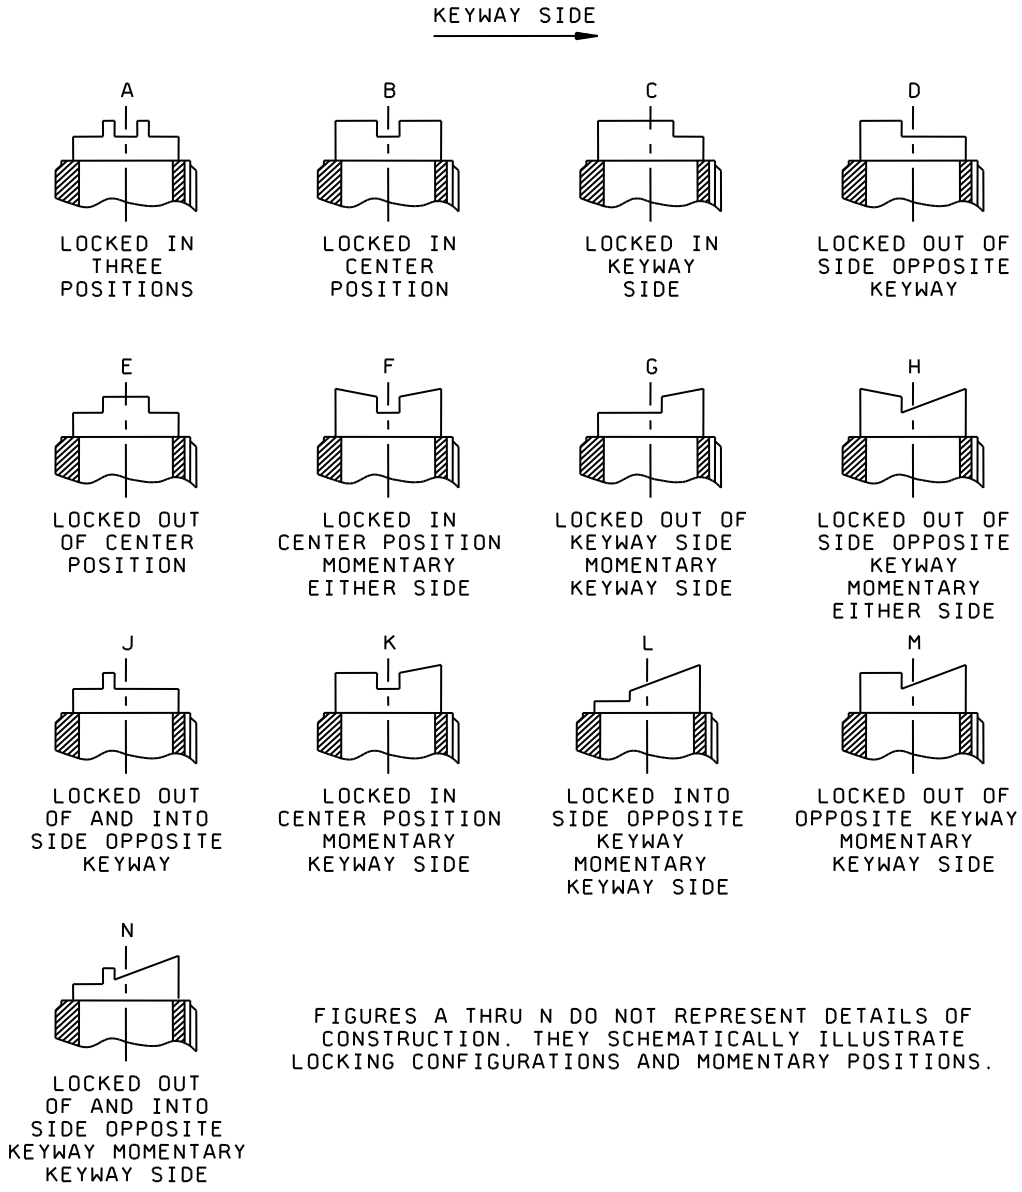


FIGURE 1 Dimensions and configurations Continued

NOTES:

1. For hardware and terminal screw detail specifications see supplement of MIL-DTL-83731.
2. All dimensions are in inches.
3. Unless otherwise specified, tolerance is ± .020 on two place decimals and ± .005 on three place decimals.
4. Locking means optional.
5. For design feature purposed, this standard takes precedence over procurement documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Example of Part No. MS25126-B1-On off on, toggle seal, locked in center off position.

All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.

Locking Arrangement: Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released.

The force required to release the locking mechanism shall be 3 to 5 pounds.

Maximum weight is 0.15 pound.

Referenced documents shall be of the issue in effect on the date of invitation for bid.

Electrical Endurance: 10,000 Cycles.
Mechanical Endurance: 20,000 Cycles

Electrical rating: See table I

The superseding dash numbers are interchangeable with the superseded dash numbers.

Superseding No.	Superseded No.
MS25126-A1	MS25126-1
MS25126-B1	MS25126-2
MS25126-C1	MS25126-3
MS25126-D1	MS25126-5
MS25126-E1	MS25126-7
MS25126-C3	MS25126-4
MS25126-E3	MS25126-8
MS25126-J4	MS25126-9
MS25126-M11	MS25126-6

Part Number Example

The locking combination character is placed between the “-“ and the number.
If selecting a MS25126-4 with the “B” locking combination option the part number is MS25126-B4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

Table I Detail Requirement

MS part No.	Locking Combination	Circuit with Toggle Lever In			Current Capacity (Amperes Per Pole)					
					28 VDC			115 VAC 400 Hertz		
		Opposite keying side	Center	Keying side	Lamp-load Circuit	Resistive circuit	Inductive Circuit	Lamp-load Circuit	Resistive circuit	Inductive Circuit
MS25126-1	A,B,C,D,E	On	Off	On	7	20	15	4	20	15
MS25126 -2	C,E		None	Off						
MS25126-3				On						
MS25126-4	B,J		Off	None						
MS25126-5	L		Mom. Off							
MS25126-6			None	Mom. On	5	18	10	2	11	8
MS25126-7	F,H	Mom-On	Off							
MS25126-8	K	None								
MS25126 -9	L	On	None	Mom. Off	7	20	15	4	20	15
MS25126 -10		Off		Mom. On	5	18	10	2	11	8
MS25126 -11	G,K,M,N	On	Off							

Referenced documents
MIL-DTL-83731

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5930-2018-015)

Review activities:
Army – AR, AV, MI
Navy – EC, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.