INCH-POUND
MS25127L
w/Amendment 1
22 August 2018

SUPERSEDING
MS25127L
15 December 2005

DETAIL SPECIFICATION SHEET

SWITCHES, TOGGLE, UNSEALED AND SEALED TOGGLE GENERAL SPECIFICATION FOR

INACTIVE FOR NEW DESIGN AFTER 16 SEPTEMBER 1969

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-83731.

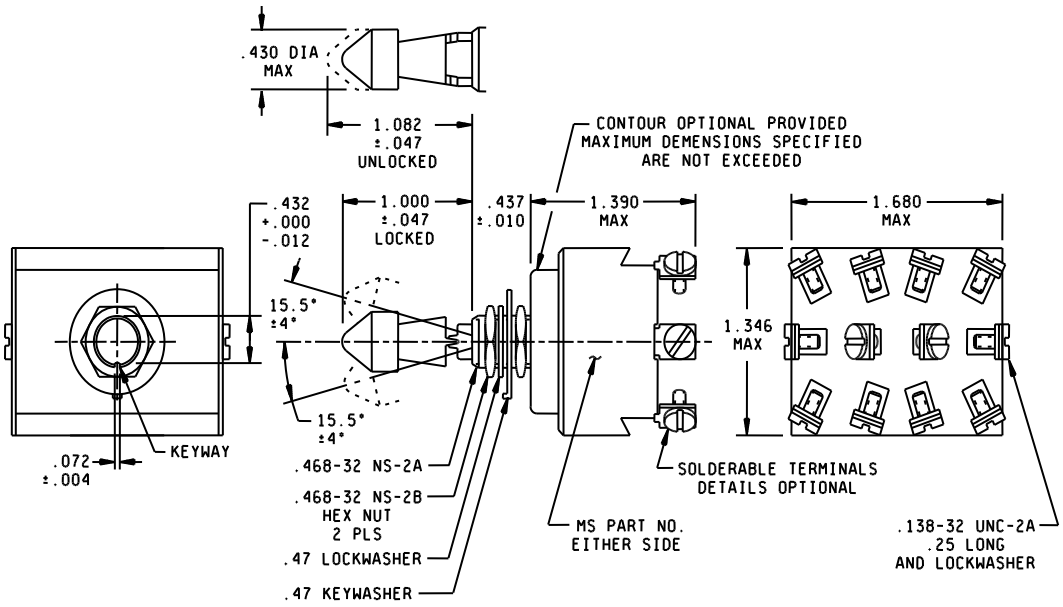


FIGURE 1 Dimensions and configurations

ASMC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

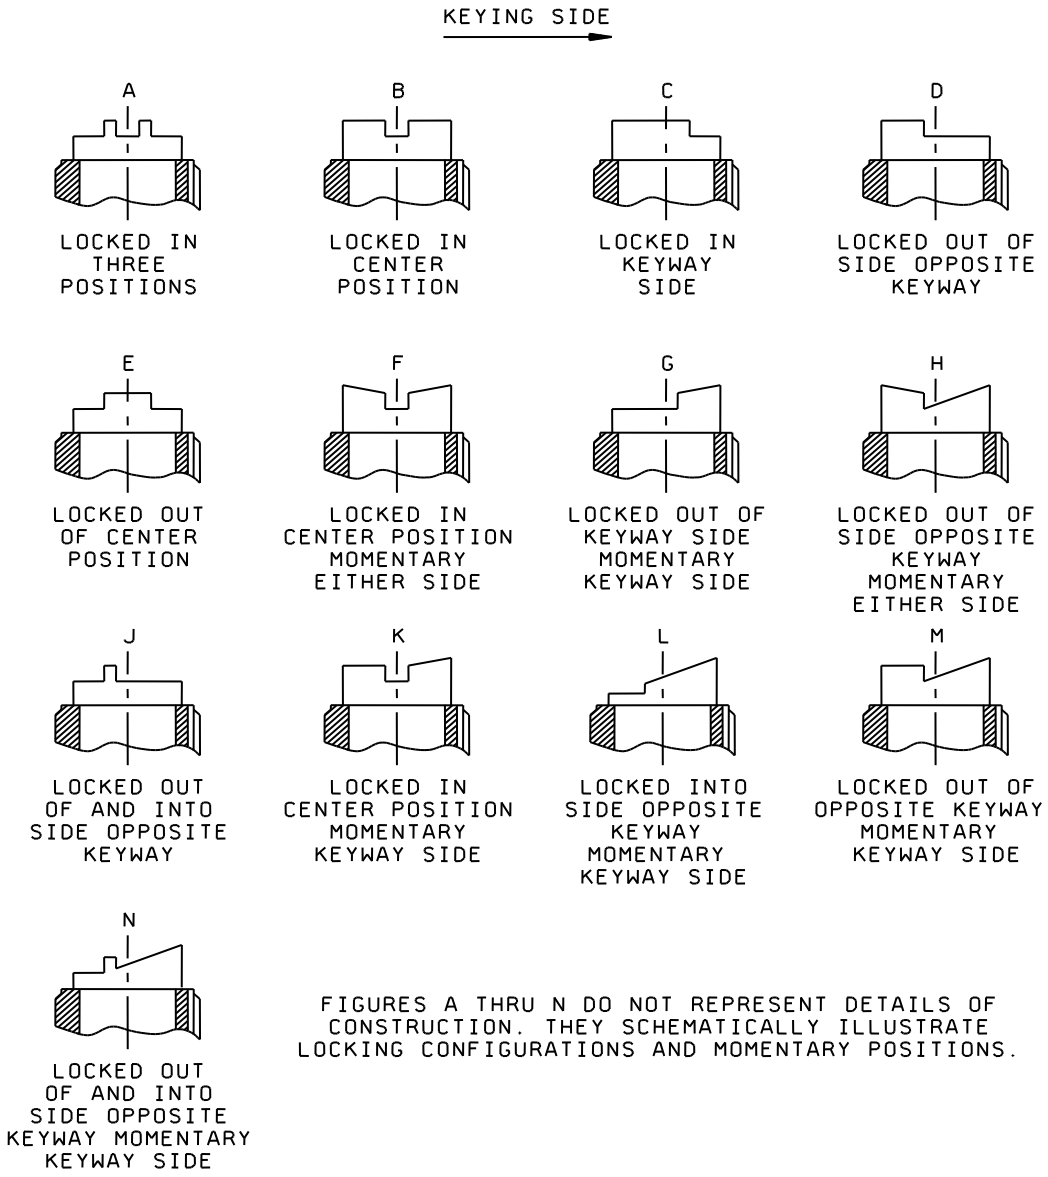


FIGURE 1 Dimensions and configurations - Continued

NOTES:

1. All dimensions are in inches.
2. For hardware and terminal screw detail specifications see supplement of MIL-DTL-83731.
3. Unless otherwise specified, tolerance is ± .020 on two place decimals and ± .005 on three place decimals.
4. Example of part NO. MS25127-B1-On, off, on, toggle seal, locked in center position.
5. Locking means optional.
6. For design feature purposed, this standard takes precedence over procurement documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.

Locking Arrangement: Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released.

The force required to release the locking mechanism shall be 3 to 5 pounds.

Maximum weight is .19 lb.

Electrical Endurance: 10,000 Cycles.
Mechanical Endurance: 20,000 Cycles

Referenced documents shall be of the issue in effect on the date of invitation for bid.

Electrical rating: Table I

Part Number Example

The locking combination character is placed between the "-" and the number.
If selecting a MS25127-4 with the "B" locking combination option the part number is MS25127-B4

Table I Detail Requirement

<table>
<tr><th rowspan="3">MS part No.</th><th rowspan="3">Locking Combination</th><th colspan="3" rowspan="2">Circuit with Toggle Lever In</th><th colspan="6">Current Capacity (Amperes Per Pole)</th></tr>
<tr><th colspan="3">28 Volts Direct current</th><th colspan="3">115 Volts Alternating Current 400 Hertz</th></tr>
<tr><th>Opposite keying side</th><th>center</th><th>Keying side</th><th>Lamp-load Circuit</th><th>Resistive circuit</th><th>Inductive Circuit</th><th>Lamp-load Circuit</th><th>Resistive circuit</th><th>Inductive Circuit</th></tr>
<tr><td>MS25127-1</td><td>A,B,C,D,E</td><td rowspan="6">On</td><td>Off</td><td>On</td><td rowspan="4">5</td><td rowspan="4">20</td><td rowspan="4">12</td><td rowspan="4">4</td><td rowspan="4">20</td><td rowspan="4">15</td></tr>
<tr><td>MS25127 -2</td><td rowspan="2">C,E</td><td rowspan="2">None</td><td>Off</td></tr>
<tr><td>MS25127-3</td><td>On</td></tr>
<tr><td>MS25127-4</td><td>B,J</td><td>Off</td><td rowspan="2">None</td></tr>
<tr><td>MS25127-5</td><td rowspan="2">L</td><td>Mom. Off</td><td rowspan="3">4</td><td rowspan="3">18</td><td rowspan="3">10</td><td rowspan="3">2</td><td rowspan="3">11</td><td rowspan="3">5</td></tr>
<tr><td>MS25127-6</td><td>None</td><td rowspan="3">Mom. On</td></tr>
<tr><td>MS25127-7</td><td>F,H</td><td>Mom-On</td><td rowspan="2">Off</td></tr>
<tr><td>MS25127-8</td><td>K</td><td>None</td></tr>
<tr><td>MS25127-9</td><td rowspan="2">L</td><td>On</td><td rowspan="2">None</td><td>Mom. Off</td><td>5</td><td>20</td><td>12</td><td>4</td><td>20</td><td>15</td></tr>
<tr><td>MS25127-10</td><td>Off</td><td rowspan="2">Mom. On</td><td rowspan="2">4</td><td rowspan="2">18</td><td rowspan="2">10</td><td rowspan="2">2</td><td rowspan="2">11</td><td rowspan="2">5</td></tr>
<tr><td>MS25127-11</td><td>G,K,M,N</td><td>On</td><td>Off</td></tr>
</table>

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

Referenced documents
MIL-DTL-83731

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5930-2018-016)

Review activities:
Army – AR, AV, MI
Navy – EC, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.