


FED. SUP CLASS
5935

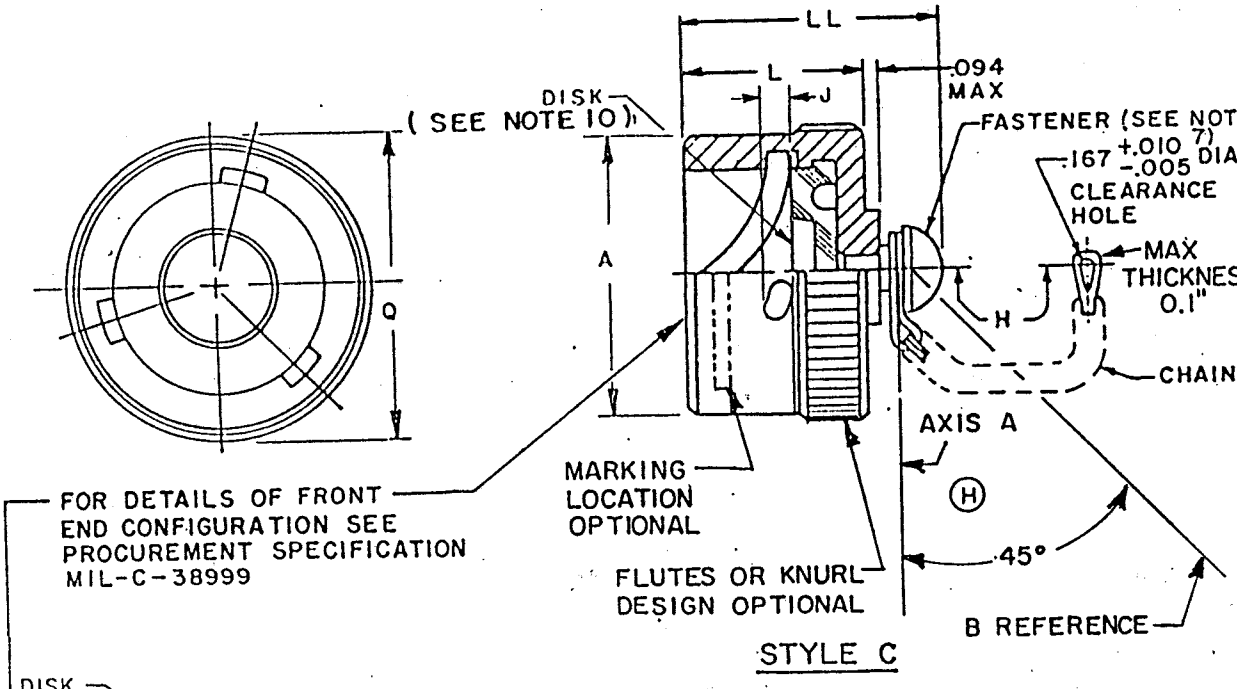

STYLE C

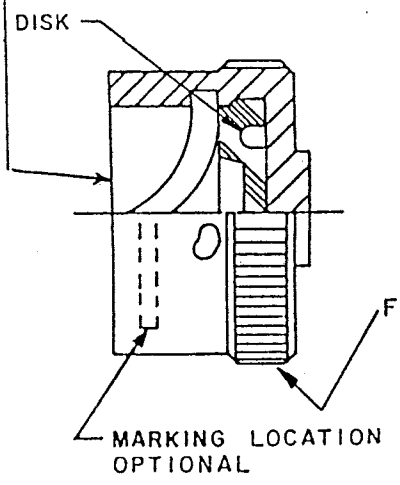

STYLE A

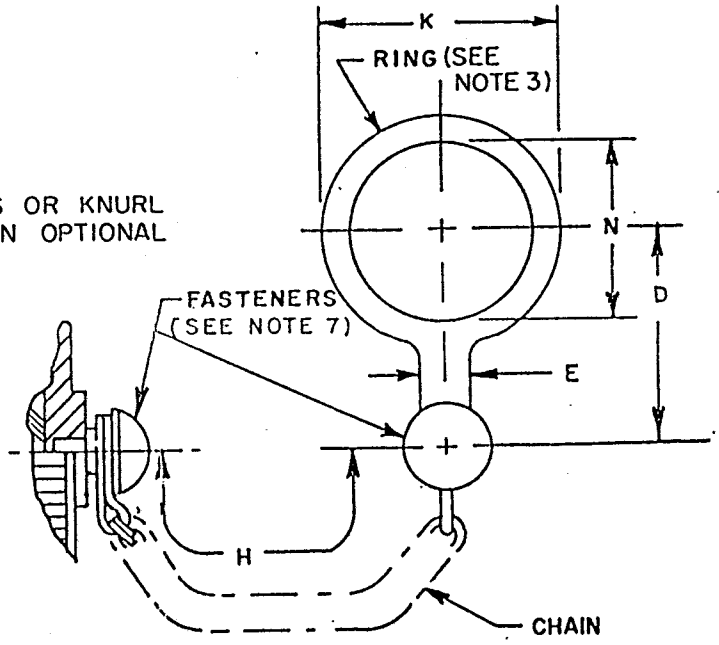

STYLE N

Ⓗ denotes changes

P.A AF - 85 Other Cust Army - CR Navy - AS	International interest	TITLE COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS27502
Procurement Specification MIL-C-38999		SUPERSEDES:	PAGE 1 OF 3

5935-3613-02

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261023T16:42Z
Check the source to verify that this is the current version before use.

User activities: Army - Navy - Air Force -

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 15, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 8 Mar 68 REVISED Ⓖ 5 Oct 84 Ⓗ 31 Mar 88

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 15, 99
DLA - ES

User activities: Army -
Navy -
Air Force -

FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Procurement Specification	P.A	International interest
MIL-C-38999	AF - 85 Other Cust Army - CR Navy - AS	

SUPERSEDES

TITLE

COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE, BAYONET COUPLING, SERIES I

MILITARY STANDARD

MS27502

PAGE 2 OF 3

FED. SUP CLASS 5935


A Max dia	Q Max dia	Shell size	D Max	D Min	H +.50, -.25 Standard chain Length	L Max	LL Max	E Min ring throat	K Max dia	N Max dia	J ±.015
.82	.86	9	1.03	.71	3.0	.82	1.1	.23	1.03	.70	.105
.94	.98	11	1.13	.74					1.21	.84	
1.10	1.16	13	1.23	.93	3.5				1.40	1.01	
1.22	1.28	15	1.29	.99					1.60	1.14	
1.34	1.41	17	1.35	1.05					1.70	1.26	
1.46	1.52	19	1.41	1.11					1.80	1.39	
1.58	1.65	21	1.47	1.18	4.0				1.92	1.51	
1.70	1.77	23	1.54	1.24					2.10	1.64	
1.83	1.89	25	1.60	1.30					2.20	1.76	.138

APPROVED 8 Mar 68 REVISED (H) For

s see pages 1 and 2

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T16:42Z
Check the source to verify that this is the current version before use.

Example of part number

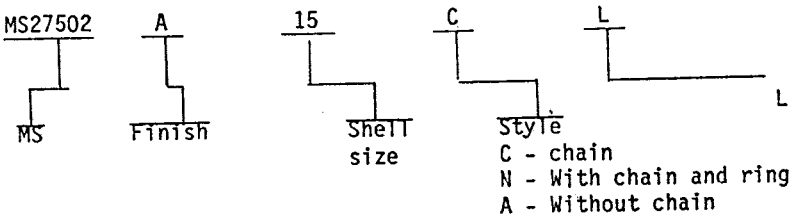

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.74	18.8	1.13	28.7	1.39	35.3	1.77	45.0
.010	0.25	.82	20.8	1.14	29.0	1.40	35.6	1.80	45.7
.015	0.38	.84	21.3	1.16	29.5	1.41	35.8	1.83	46.5
.030	0.76	.86	21.8	1.18	30.0	1.46	37.1	1.89	48.0
.094	2.39	.93	23.6	1.21	30.7	1.47	37.3	1.92	48.7
.1	2.5	.94	23.9	1.22	31.0	1.51	38.4	2.10	53.3
.105	2.67	.98	24.9	1.23	31.2	1.52	38.6	2.20	55.9
.138	3.51	.99	25.1	1.24	31.5	1.54	39.1	3.0	76.2
.167	4.24	1.01	25.7	1.26	32.0	1.58	40.1	3.5	88.9
.23	5.8	1.03	26.2	1.28	32.5	1.60	40.6	4.0	101.6
.25	6.4	1.05	26.7	1.29	32.8	1.64	41.7		
.50	12.7	1.10	27.9	1.30	33.0	1.65	41.9		
.70	17.8	1.1	28.0	1.34	34.0	1.70	43.2		
.71	18.0	1.11	28.2	1.35	34.3	1.76	44.7		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Material: Cover: Impact extruded or machined aluminum alloy.
   Disk: Silicone elastomer.
   Ring: Stainless steel passivated, .030 maximum thickness.
   Chain: Stainless steel, passivated, conforming to RR-C-271, type II, class 3.
   Fastener: Stainless steel, passivated.
4. Finish: See MIL-C-38999.
(H) 5. In the event of conflict between the text of this standard and the referenced cited herein, the text of this standard shall take precedence.
(H) 6. Referenced Government documents of the issue listed in that issue of the Department Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. The chain shall rotate freely on the cover fastener.
8. Applicable connectors: MIL-C-27599 series I and MIL-C-38999 series I.
(H) 9. The protective cover and chain assembly shall withstand a static tensile load of 35 pounds applied along the B reference for 5 minutes.
10. Disk shall be bonded or mechanically retained.
(H) 11. Not for space born applications.

User activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 15, 99
DLA - ES

Revi ities: Army -
Navy -
Air Force -

-d is approved for use by all Departments and Agencies of the
:. Selection for all new engineering and design applications
se shall be made from this document when applicable.

This military
Department of
and for repeti

APPROVED 8 Mar 68 REVISED (H) For changes see pages 1 and 2

P.A AF - 85 Other Cust Army - CR Navy - AS	International interest	TITLE COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS27502
Procurement Specification MIL-C-38999		SUPERSEDES:	PAGE 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.