
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704 0188

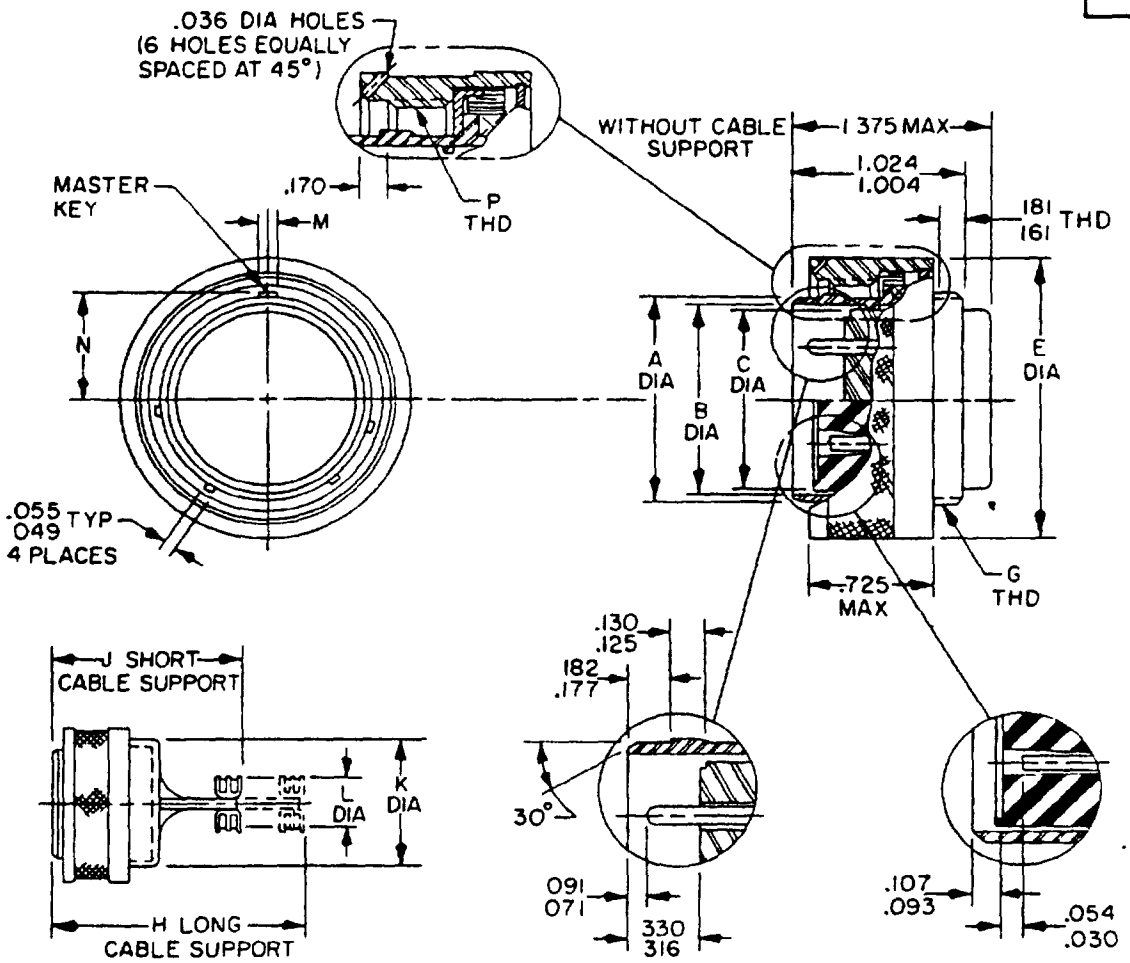


| Inches | mm | Inches | mm |
|---|---|---|---|
| .030 | 0.76 | .161 | 4.09 |
| .036 | 0.91 | .170 | 4.32 |
| .049 | 1.24 | .177 | 4.50 |
| .054 | 1.37 | .181 | 4.60 |
| .055 | 1.40 | .182 | 4.62 |
| .071 | 1.80 | .316 | 8.03 |
| .091 | 2.31 | .330 | 8.38 |
| .093 | 2.36 | .725 | 18.42 |
| .107 | 2.72 | 1.004 | 25.50 |
| .125 | 3.18 | 1.024 | 26.01 |
| .130 | 3.30 | 1.375 | 34.92 |

INACTIVE FOR AIR FORCE NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT AFTER 14 NOV 1977.

Use MIL-C-83723, Series III, connector which is interchangeable.

(D) denotes change

| | | |
|---|---|---|
| PREPARING ACTIVITY Air Force - 85<br>CUSTODIANS ARMY NAVY<br>AIR FORCE 85 DLA ES<br>REVIEW Air Force - 11, 17, 99<br>USER<br>PROJECT NUMBER 5935-F361-06 | MILITARY SPECIFICATION SHEET<br>TITLE<br>CONNECTOR, ELECTRICAL, PLUG, RATCHET LOCI COUPLING, FIREWALL SERIES | SPECIFICATION SHEET NUMBER<br>MS27615D(USAF) 7 Sept 90<br>SUPERSEDING<br>MS27615C 14 Nov 77<br>AMSC N/A FSC 5935 |
| DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited | | Page 1 of 7 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704 0188

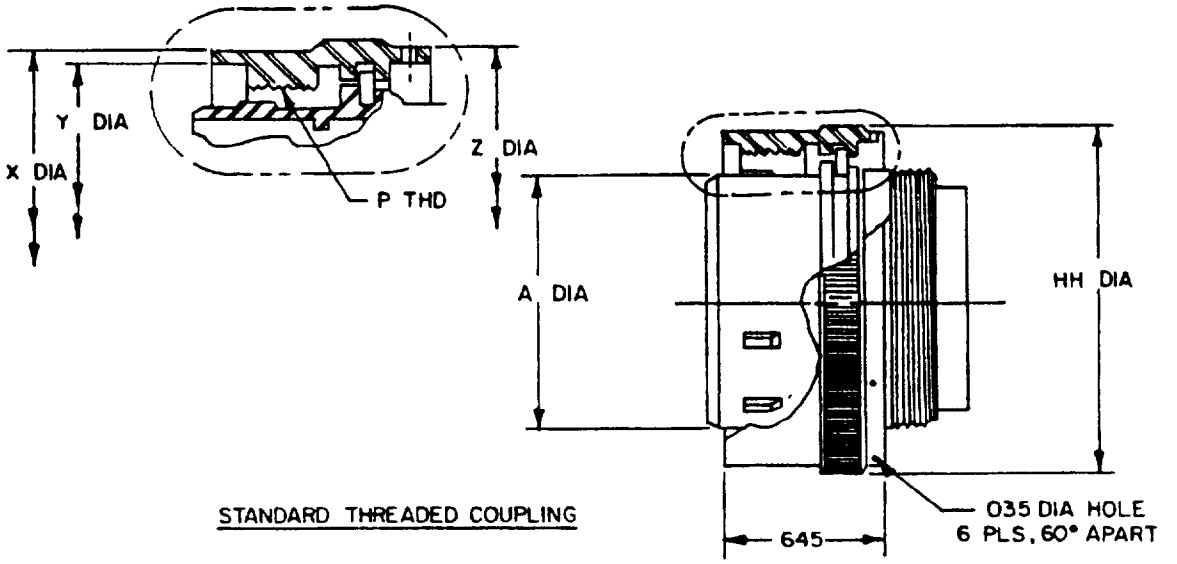


STANDARD THREADED COUPLING

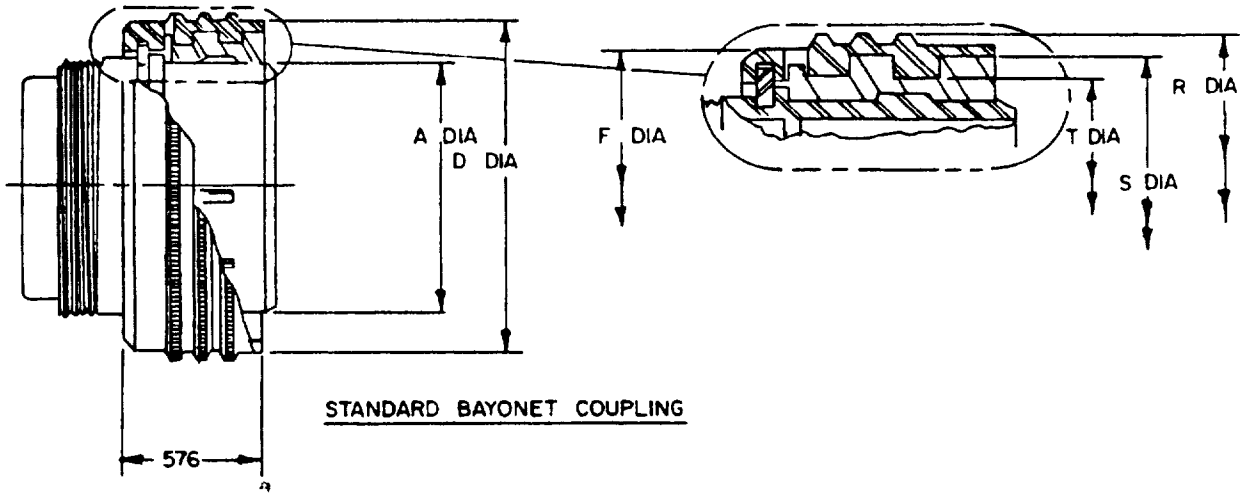


STANDARD BAYONET COUPLING

| Inches | mm |
|---|---|
| .035 | 0.89 |
| .576 | 14.63 |
| .645 | 16.38 |

Ⓓ denotes change

| | | |
|---|---|---|
| PREPARING ACTIVITY Air Force - 85<br>CUSTODIANS ARMY NAVY<br>AIR FORCE 85 DLA ES<br>REVIEW Air Force - 11, 17, 99<br>USER<br>PROJECT NUMBER 5935-F361-06 | MILITARY SPECIFICATION SHEET<br>TITLE<br>CONNECTOR, ELECTRICAL, PLUG<br>RATCHET LOCK COUPLING, FIREWALL<br>SERIES | SPECIFICATION SHEET NUMBER<br>MS27615D(USAF)<br>SUPERSEDING<br>MS27615C 14 Nov 77<br>AMSC N/A FSC 5935 |
| DISTRIBUTION STATEMENT | | Page 2 of 7 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS ... ATION
SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN
THE SOLICITATION MIL-C-26500

Form Approved
OMB No 0704 0188

| Shell size (see note) | A dia +.000 (0.00) -.005 (0.13) | B dia +.003 (0.08) -.006 (0.15) | C dia max | D dia ±.005 (0.13) | E dia ±.005 (0.13) | F dia ±.005 (0.13) | G 36NS-2A | H dim max | HH dia max | J dim max |
|---|---|---|---|---|---|---|---|---|---|---|
| 12 | .696 (17.68) | .634 (16.10) | .508 (14.73) | N/A | 1.11 (28.2) | N/A | .7334 (18.628) | 2.045 (51.94) | 1.086 (27.58) | N/A |
| 14 | .765 (19.43) | .703 (17.86) | .627 (15.92) | 1.059 (26.40) | 1.175 (29.84) | 1.016 (25.81) | .8032 (20.401) | 2.145 (54.48) | 1.149 (29.18) | 1.875 (47.62) |
| 16 | .892 (22.66) | .830 (21.08) | .754 (19.15) | 1.186 (30.12) | 1.302 (33.07) | 1.143 (29.03) | .9302 (23.627) | 2.245 (57.02) | 1.275 (32.38) | 1.875 (47.62) |
| 18 | .998 (25.35) | .936 (23.77) | .860 (21.84) | 1.292 (32.82) | 1.408 (35.76) | 1.249 (31.72) | 1.0362 (26.319) | 2.345 (59.56) | 1.383 (35.13) | 1.875 (47.62) |
| 22 | 1.248 (31.70) | 1.186 (30.12) | 1.110 (28.19) | 1.542 (39.17) | 1.658 (42.11) | 1.499 (38.07) | 1.2862 (32.669) | 2.575 (65.40) | 1.633 (41.49) | 1.875 (47.62) |
| 24 | 1.373 (34.87) | 1.311 (33.30) | 1.235 (31.37) | 1.667 (42.34) | 1.78 (45.2) | 1.624 (41.25) | 1.4111 (35.842) | 2.675 (67.94) | 1.758 (44.65) | N/A |
| 28 | 1.623 (41.22) | 1.561 (39.65) | 1.488 (37.80) | N/A | 2.038 (51.76) | N/A | 1.6611 (42.192) | 2.645 (67.18) | 2.008 (51.00) | N/A |

NOTE. Form size 12, 24, and 28 in bayonet series not released.

Ⓓ denotes change

THIS SPECIFICA APPROVED FOR USE BY all Departments
and Agencies of the Department of Defense

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY NAVY
AIR FORCE 85 DLA ES
REVIEW USER Air Force - 11, 17, 99
PROJECT NUMBER 5935-F361-06

**MILITARY SPECIFICATION SHEET**

TITLE
CONNECTOR, ELECTRICAL, PLUG RATCHET LOCK COUPLING, FIREWALL SERIES

SPECIFICATION SHEET NUMBER
MS27615D(USAF)

SUPERSEDING
MS27615C 14 Nov 77

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT



DD Form 672, MAY 88

Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

AREA SAFT
AMSC N/A
DISTRIBUTION STATEMENT A: APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

Form Approved
OMB No 0704 0188

| Shell size (See note) | K dia | L dia | M dim ±.003 (0.08) | N dim ±.003 (0.08) | P UNEF-28 | R dia max | S dia ±.0035 (0.008) | T dim +.005 (0.13) -.000 (0.00) | W ±.006 (0.15) | X ±.005 (0.13) | Y ±.004 (0.10) | Z ±.004 (0.10) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 12 | .788 (20.02) | .435 (11.05) | .084 (2.13) | .370 (9.40) | .875-20 (22.22) | N/A | N/A | N/A | N/A | .984 (25.0) | .928 (25.12) | .982 (24.94) |
| 14 | .862 (21.89) | .504 (12.80) | .084 (2.13) | .405 (10.29) | .937-20 (23.80) | 1.087 (27.61) | 1.0055 (25.565) | .900 (22.86) | .282 (7.16) | 1.054 (26.77) | .998 (25.34) | .962 (24.43) |
| 16 | .989 (25.12) | .686 (17.42) | .115 (2.92) | .468 (11.87) | 1.062-18 (26.97) | 1.214 (30.84) | 1.1335 (28.790) | 1.028 (26.11) | .402 (10.21) | 1.181 (30.00) | 1.125 (28.57) | 1.089 (27.66) |
| 18 | 1.095 (27.81) | .794 (20.17) | .115 (2.92) | .521 (13.23) | 1.187-18 (30.15) | 1.320 (33.53) | 1.2395 (31.483) | 1.134 (28.08) | .556 (14.12) | 1.287 (32.68) | 1.231 (33.55) | 1.195 (30.35) |
| 22 | 1.345 (34.16) | 1.038 (26.36) | .115 (2.92) | .646 (16.41) | 1.437-18 (36.50) | 1.570 (39.88) | 1.4895 (37.833) | 1.384 (35.15) | .608 (15.44) | 1.537 (39.03) | 1.481 (37.61) | 1.445 (36.70) |
| 24 | 1.595 (40.51) | 1.162 (29.51) | .115 (2.92) | .708 (17.98) | 1.562-18 (39.67) | 1.695 (43.05) | 1.6148 (41.016) | 1.511 (38.38) | N/A | 1.662 (42.21) | 1.606 (40.79) | 1.570 (39.87) |
| 28 | 1.845 (46.86) | 1.412 (35.86) | .115 (2.92) | .833 (21.16) | 1.812-16 (46.02) | N/A | N/A | N/A | N/A | 1.912 (48.56) | 1.856 (47.14) | 1.820 (46.22) |

NOTE: Form size 12, 24, and 28 in bayonet series not released.

Ⓓ denotes change

| | | |
|---|---|---|
| PREPARING ACTIVITY Air Force - 85<br>CUSTODIANS ARMY NAVY<br>AIR FORCE 85 DLA ES<br>REVIEW Air Force - 11, 17, 99<br>USER<br>PROJECT NUMBER 5935-F361-06 | MILITARY SPECIFICATION SHEET<br>TITLE<br>CONNECTOR, ELECTRICAL, PLUG, RATCHET LOCK COUPLING, FIREWALL SERIES | SPECIFICATION SHEET NUMBER<br>MS27615D(USAF)<br>SUPERSEDING<br>MS27615C 14 Nov 77<br>AMSC N/A FSC 5935 |
| DISTRIBUTION STATEMENT | | Page 4 of 7 |



Source: https://assist.dla.mil -- Downloaded: 20260-23T16:45Z
Check the source to verify that this is the current version before use.

EQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SP ITION
T AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS S IED IN
THE SOLICITATION MIL-C-26500

Form Approved
OMB No 0704 0188

Weights of assembly less contacts and cable support (weights in pounds)

| Size | 12 | 12 | 14 | 14 | 14 | 14 | 16 | 16 | 18 | 18 | 18 | 22 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Config-uration | 03 | 12 | 04 | 07 | 12 | 15 | 10 | 24 | 08 | 14 | 31 | 19 |
| Pin | .068 | .066 | .069 | .067 | .068 | .069 | .094 | .086 | .097 | .095 | .092 | .132 |
| mm | 1.73 | 1.68 | 1.75 | 1.70 | 1.73 | 1.75 | 2.39 | 4.72 | 2.46 | 2.41 | 2.34 | 3.35 |
| Socket | .072 | .071 | .072 | .071 | .072 | .073 | .097 | .093 | .102 | .101 | .098 | .136 |
| mm | 1.83 | 1.80 | 1.83 | 1.80 | 1.83 | 1.85 | 2.46 | 2.36 | 2.59 | 2.56 | 2.49 | 3.45 |

| Size | 22 | 22 | 24 | 24 | 28 | 28 |
|---|---|---|---|---|---|---|
| Config-uration | (D) 12 | 55 | 30 | 43 | 40 | 42 |
| Pin | .135 | .138 | .160 | .162 | .209 | .208 |
| mm | 3.43 | 3.51 | 4.06 | 4.11 | 5.31 | 5.28 |
| Socket | .140 | .144 | .165 | .188 | .211 | .214 |
| mm | 3.56 | 3.66 | 4.19 | 4.78 | 5.36 | 5.44 |

(D) denotes change

| | | |
|---|---|---|
| PREPARING ACTIVITY Air Force - 85<br>CUSTODIANS ARMY NAVY<br>AIR FORCE 85 DLA ES<br>REVIEW Air Force - 11, 17, 99<br>USER<br>PROJECT NUMBER 5935-F361-06 | MILITARY SPECIFICATION SHEET<br>TITLE<br>CONNECTOR, ELECTRICAL, PLUG RATCHET LOCK COUPLING, FIREWALL SERIES | SPECIFICATION SHEET NUMBER<br>MS27615D(USAF)<br>SUPERSEDING<br>MS27615C 14 Nov 77<br>AMSC N/A FSC 5935 |
| DISTRIBUTION STATEMENT | | Page 5 of 7 |

THIS SPECIFICATI APPROVED FOR USE BY all Departments
and Agencies of the Department of Defense.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704 0188

Nomenclature breakdown
(see sheet 3)

MS27615 - K 12 T D8 P 06 - P

- MS27615 — Basic MS no.
- K — Class
- 12 — Form size
- T — T = threaded, B = bayonet — Coupling
- D8 — Insert arrangement, S = ratchet lock
- P — Contact gender: P = Pin, S = Socket
- 06 — Alternate key position (omit for normal)
- P — Cable support: H = long support, J = short support (omit for no support)

NOTES:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only.
4. The connector described in this MS drawing is classified as class K firewall connector The shell sizes range from 12 to 28 and shall conform to the applicable portions of MIL-C-26500.
5. (D) The contacts shall be crimp type contacts and shall conform to MIL-C-39029
6. (D) For insert arrangements and alternate insert (keying) positions. See MIL-STD-1554.
7. Material and finishes:
   a. The shells shall be of stainless steel material, type 300 series in accordance with MIL-C-862 and shall be passivated in accordance with MIL-STD-171.
   (D) b. The contacts shall be of telnic bronze and shall be rhodium plated in accordance with MIL-C-39029.
   c The rigid insulations shall be of fired aluminum oxide (ceramic) material.
   d. Cable supports shall be of 310 stainless steel, casting alloy and shall be passivated in accordance with MIL-STD-171.
   (D) e. Contact retainers - material optional.
   f. Seals and grommets shall be of silicone rubber.
8. (D) The contacts shall be crimped with a tool conforming to MIL-C-22520/1 crimping tool
9. All dimensions shown are in inches and are after plating dimensions The four keys and/or keyways shall be within .004 of true position relative to the master key
10. Requirements for class K connectors
    a. The connectors described herein shall meet all the environmental and electrical requirements of MIL-C-26500.
    b. In addition to the requirements of MIL-C-26500, the connectors shall meet the following requirements:
    (D) (1) Fireproof. A connector plug mated to its applicable receptacle assembly shall be mounted as used in service on a fixture fabricated in accordance with figure 9 of MIL-C-5015 and subjected to a 1,093°C flame for a period of 60 minutes. The flame shall be directed at the connector, and shall completely encompass the connector. The temperature of the flame shall be measured at .250 inch, vertical distance from the rear of the connector. The flame shall be produced by using propane fuel with a high air-to-fuel mixture at a flow rate equivalent to an input of 33,000 to 37,000 BTU/HR The assembly shall be vibrated continuously at 33 CPS with total excursion of .250 inch for 60 minutes. The contacts shall carry the following dc current for the first 5 minutes of the test.

(D) denotes change

| | | | |
|---|---|---|---|
| PREPARING ACTIVITY: Air Force - 85<br>CUSTODIANS: ARMY — NAVY — AIR FORCE 85 — DLA ES<br>REVIEW: Air Force - 11, 17, 99<br>USER<br>PROJECT NUMBER 5935-F301-06 | MILITARY SPECIFICATION SHEET<br>TITLE: CONNECTOR, ELECTRICAL, PLUG RATCHET LOCK COUPLING, FIREWALL SERIES | SPECIFICATION SHEET NUMBER: MS27615D(USAF)<br>SUPERSEDING: MS27615C — 14 Nov 77<br>FSCM N/A — FSC 5935 | |
| DISTRIBUTION STATEMENT | | | Page 6 of 7 |

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T16:45:
Check the source to verify that this is the current version before use.

REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS S ATION
SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN
THE SOLICITATION MIL-C-26500

Form Approved
OMB No 0704 0188

| Contact size | Amperes |
|---|---|
| 12 | 41. |
| 16 | 22. |
| 20 | 7.5 |

During the next minute of test, 110/125 volts at 60 CPS shall be applied between adjacent contacts and between contacts and the shell without exceeding 2 amperes of line current. Throughout the test, there shall be no passing of flames through the connector, nor shall there be any secondary combustion at the rear of the panel mounted connector. There shall be no adapters or extensions other than the standard cable clamp assembled to the connectors during the fireproof test.

(2) Insulation resistance, fireproof: After the flame test, the connectors shall be allowed to cool to room temperature, the mated connectors shall then be subjected to a test potential of 500 V dc. The insulation resistance of the connectors shall be greater than 2,000 megohms.

(3) Dielectric withstanding voltage, fireproof. After exposure to the flame and insulation resistance tests, the mated connectors shall be subjected to 1500 V ac rms. Applied between adjacent contacts and the contacts closet to the shell, there shall be no evidence of breakdown or flashover.

(4) Contact retention, fireproof. After exposure to the flame, insulation resistance and delelectric withstanding tests, the individual contact locking mechanism shall withstand the axial loads specified in the table

| Contact size | Axial load (lbs.) (fireproof) |
|---|---|
| 12 | 23 |
| 16 | 18 |
| 20 | 12 |

The load shall be applied to the contact as specified in MIL-C-26500 and shall be applied at a rate of one pound per second.

11. The class K connector plug described herein shall include a ratchet locking mechanism within the plug assembly. The ratchet locking mechanism engages only when the mating shells bottoms out (metal to metal) indicating completion of mating of the shells. The ratchet locking mechanism will not require safety wiring.
12. The dimension and weight requirements shall be as specified in the tables shown on the MS drawings.
13. Contacts are not assembled into the connectors, but are furnished separately in containers.
14. Dust caps are supplied for front and back end of the connectors.
15. (D) When part number designates a cable support, the connector and cable support will be furnished unassembled.

THIS SPECIFICATION APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

(D) denotes change

| | | |
|---|---|---|
| PREPARING ACTIVITY Air Force - 85<br>CUSTODIANS ARMY NAVY<br>AIR FORCE 85 DLA ES<br>REVIEW Air Force - 11, 17, 99<br>USER<br>PROJECT NUMBER 5935-F361-06 | MILITARY SPECIFICATION SHEET<br>TITLE<br>CONNECTOR, ELECTRICAL, PLUG RATCHET LOCK COUPLING, FIREWALL SERIES | SPECIFICATION SHEET NUMBER<br>MS27615D(USAF)<br>SUPERSEDING<br>MS27615C 14 Nov 77<br>AMSC N/A FSC 5935 |
| DISTRIBUTION STATEMENT | | Page 7 of 7 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.