INCH-POUND

MS28055B
13 July 2007
SUPERSEDING
MS28055A
8 February 1960

DETAIL SPECIFICATION SHEET

FLANGES, MOUNTING, ATTACHABLE, AIRCRAFT INSTRUMENT

Inactive for new design as of 20 October 1999.

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet, MIL-F-6836, "Flanges, Mounting, Attachable, Aircraft Instrument", and figure 1.

REQUIREMENTS:

1. The material shall be in accordance with MIL-F-6836.

2. The finish shall be in accordance with MIL-F-6836.

3. The drills shall be in accordance with AND10387, "Drill Sizes and Drilled Hole Tolerances Twist".

4. Unless otherwise specified, tolerances in decimals are ±0.005.

NOTES:


1. Remove all burrs and sharp edges.

2. Dimensions are in inches.

3. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

4. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

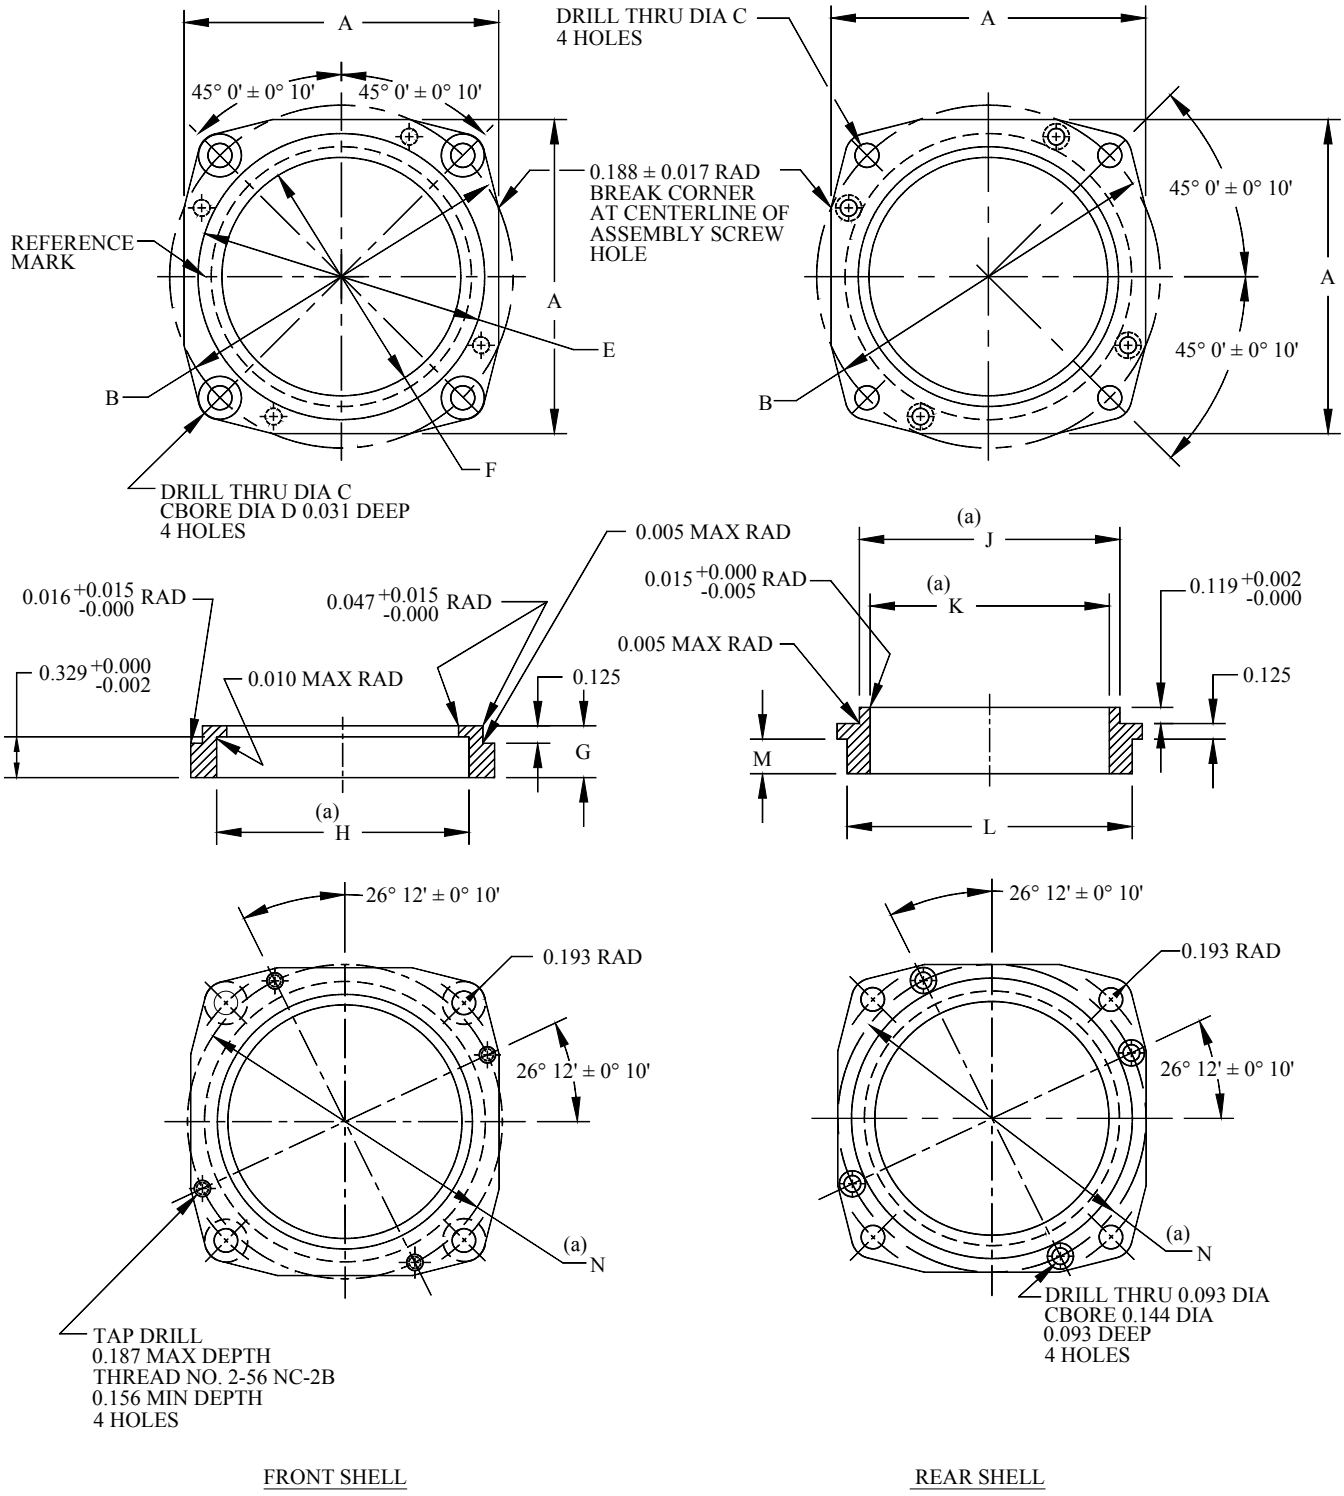

NOTE: (a) diameters must be concentric and in correct relation to outside contour within 0.005 TIR.

FIGURE 1. Dimensions and tolerances.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.


TABLE I. Dimensions and specifications.

Size	Part	A ±0.015	B ±0.003 DIA	C ±0.002 DIA	D ±0.006 DIA	E ±0.010 DIA	F ±0.006 DIA	G ±0.010	(a)H ±0.002 DIA	(a)J ±0.002 DIA	(a)K ±0.003 DIA	L ±0.004 DIA	M ±0.006	(a)N ±0.003 DIA
04	Front shell	1.735	1.855	0.149	0.237	1.490	1.438	0.505	1.580	--	--	--	--	1.724
05	Rear shell	1.735	1.855	0.149	--	--	--	--	--	1.575	1.513	N/A	0.000	1.724
06	Front shell	2.375	2.625	0.170	0.281	2.245	1.875	0.375	2.017	--	--	--	--	2.437
07	Rear shell	2.375	2.625	0.170	--	--	--	--	--	2.012	1.951	2.250	0.255	2.437
08	Front shell	3.250	3.500	0.170	0.281	3.120	3.105	0.505	3.247	--	--	--	--	3.413
09	Rear shell	3.375	3.500	0.170	--	--	--	--	--	3.242	3.143	N/A	0.000	3.413
10	Flange	Consists of: One MS28055-04 front shell, one MS28055-05 rear shell, four AN500 undrilled 2-56 assembly screws, four AN500 undrilled 6-32 mounting screws, and four NASM21042 6-32 mounting nuts.												
11	Flange	Consists of: One MS28055-06 front shell, one MS28055-07 rear shell, four AN500 undrilled 2-56 assembly screws, four AN500 undrilled 8-32 mounting screws, and four NASM21042 8-32 mounting nuts.												
12	Flange	Consists of: One MS28055-08 front shell, one MS28055-09 rear shell, four AN500 undrilled 2-56 assembly screws, four AN500 undrilled 8-32 mounting screws, and four NASM21042 8-32 mounting nuts.												

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION:

1. Part or identification number (PIN). The PIN to be used for attachable aircraft instrument mounting flanges acquired to this specification is created as follows:

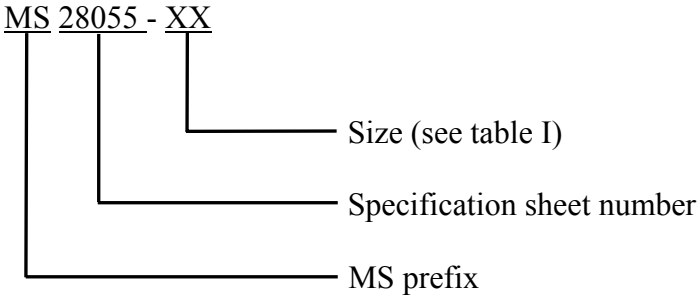

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - MI
Navy - AS
Air Force - 99

Preparing Activity:
DLA - GS1

(Project 1680-2006-002)

Review Activity:
Air Force - 11

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.