

User activities: Army - CG, MC, OS, SH
Navy - Air Force - 14, 19
Review activities: Army - AR, MI
Navy - AS, YD
Air Force - 11, 99
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


FED. SUP CLASS
5935



VIEW SHOWING PLUG CAP
MS17350
ADAPTER ASSEMBLY
TYPE A




VIEW SHOWING RECEPTACLE CAP
MS17349
TYPE B
ADAPTER ASSEMBLY



STAMP PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN APPROXIMATE POSITION SHOWN

VIEW AT M

CANCELED, FOR PROCUREMENT USE MIL-C-85049/3

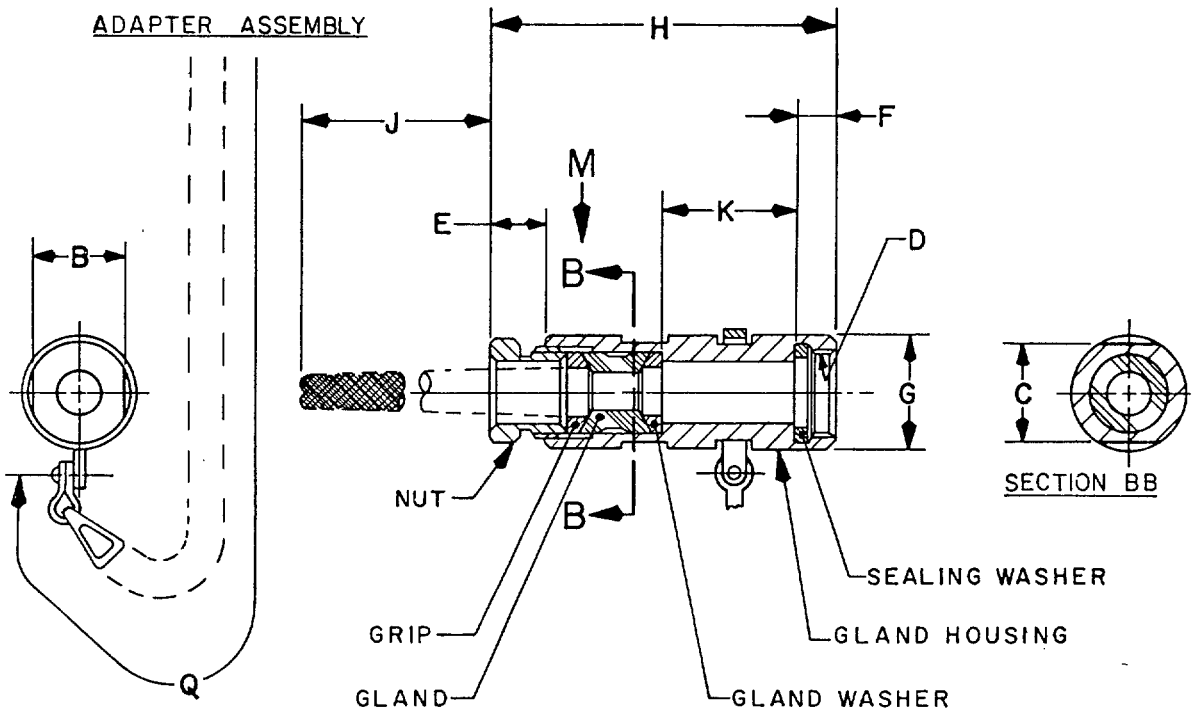

APPROVED 25 May 1967
REVISED (A) 12 AUGUST 1987

(A) ENTIRE STANDARD REVISED

P.A Navy - EC Other Cust Army - CR AF - 85	International interest	TITLE ADAPTER, (STRAIGHT THRU) CABLE SEALING AND GRIPPING	MILITARY STANDARD MS90571
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 1 OF 6

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-3605-13

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://standards.globalspec.com/std/1000/dla/MS90571-2023-10-23T01:30Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - AS, YD
Air Force - 11, 99

User activities: Army -
Navy - CG, MC, OS, SH
Air Force - 14, 19

Adapter size number	Size	Cable range		B	C	D	E	F	G	H	J	K
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	±.016	Dia +.010 -.020	Max	Approx free length	+.015 -.025
1	12	.337	.281	.750	.812	0.7500-20 UNEF	.539	.479	.938	2.935	3.344	.621
2	12	.281	.219	.750	.812	0.7500-20 UNEF	.539	.479	.938	2.935	2.844	.621
3	14	.438	.400	.875	.938	0.8750-20 UNEF	.539	.479	1.062	3.248	4.344	.871
4	16	.605	.511	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	5.188	1.121
5	16	.530	.436	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	4.688	1.121
6	16	.405	.316	1.000	1.062	1.0000-20 UNEF	.597	.479	1.188	3.712	3.688	1.121
7	18	.699	.605	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	6.188	1.371
8	18	.625	.560	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	6.188	1.371
9	18	.455	.361	1.062	1.125	1.1250-18 UNEF	.597	.479	1.312	4.024	4.188	1.371
10	20	.828	.715	1.125	1.250	1.2500-18 UNEF	.625	.479	1.438	4.115	6.688	1.371
11	20	.562	.449	1.125	1.250	1.2500-18 UNEF	.625	.479	1.438	4.115	5.188	1.371
12	22	.900	.787	1.250	1.375	1.3750-18 UNEF	.597	.479	1.562	4.150	7.188	1.371
13	22	.750	.637	1.250	1.375	1.3750-18 UNEF	.597	.479	1.562	4.150	6.688	1.371

APPROVED 25 May 1967 REVISED (A) ENTIRE STANDARD REVISED

FED. SUP CLASS 5935

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A Navy - EC
Other Cust Army - CR
AF - 85

International interest

Procurement Specification MIL-C-22992

SUPERSEDES:

TITLE
ADAPTER, (STRAIGHT THRU) CABLE SEALING AND GRIPPING

MILITARY STANDARD
MS90571

PAGE 2 OF 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - AS, YD
Air Force - 11, 99

User activities: Army -
Navy - CG, MC, OS, SH
Air Force - 14, 19

DD FORM 1 MAY 73 **672**

P.A Navy - EC
Other Cust Army - CR
AF - 85

International interest

Procurement Specification MIL-C-22992

SUPERSEDES:

TITLE
ADAPTER, (STRAIGHT THRU) CABLE SEALING AND GRIPPING

MILITARY STANDARD
MS90571

PAGE 3 OF 6

FED. SUP CLASS 5935

Adapter size number	Size	Cable range Max dia	Cable range Min dia	B +.000 -.010	C +.000 -.010	D Thread Class 2B-LH	E Free length max	F ±.016	G Dia +.010 -.020	H Max	J Approx free length	K +.015 -.025
14	24	1.109	.984	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	7.688	1.371
15	24	1.000	.875	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	7.188	1.371
16	24	.880	.755	1.500	1.625	1.6250-18 UNEF	.597	.479	1.812	4.212	6.688	1.371
17	28	1.310	1.185	1.750	1.875	1.8750-16 UN	.597	.479	2.062	4.275	8.688	1.372
18	28	1.230	1.105	1.750	1.875	1.8750-16 UN	.597	.479	2.062	4.275	8.188	1.372
19	28	1.180	1.055	1.750	1.875	1.8750-16 UN	.597	.479	2.062	4.275	8.188	1.372
20	32	1.531	1.406	2.000	2.062	2.0625-16 UN	.597	.479	2.312	4.337	10.688	1.371
21	32	1.445	1.320	2.000	2.062	2.0625-16 UN	.539	.479	2.312	4.337	9.688	1.371
22	32	1.375	1.250	2.000	2.062	2.0625-16 UN	.597	.479	2.312	4.337	9.688	1.371
23	36	1.656	1.531	2.250	2.312	2.3125-16 UN	.597	.479	2.562	4.399	12.688	1.370
24	36	1.562	1.437	2.250	2.312	2.3125-16 UN	.597	.479	2.562	4.399	11.188	1.370

APPROVED 25 May 1967 **REVISED** (A) ENTIRE STANDARD REVISED

Source: http://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

Adapter size number	Size	Cable range		L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
		Max dia	Min dia				
1	12	.337	.281	0.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	.281	.219	0.8750-0.1P-0.2L-DS	1.094	.765	5.00
3	14	.438	.400	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
4	16	.605	.511	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
5	16	.530	.436	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
6	16	.405	.316	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
7	18	.699	.605	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
8	18	.625	.560	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
9	18	.455	.361	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
10	20	.828	.715	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
11	20	.562	.449	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
12	22	.900	.787	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
13	22	.750	.637	1.5000-0.1P-0.2L-DS	1.688	.980	6.00

APPROVED 25 May 1967
REVISED (A) ENTIRE STANDARD REVISED

User activities: Army - CG, MC, OS, SH
Navy - 14, 19
Air Force - 14, 19

Review activities: Army - AR, MI
Navy - AS, YD
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

Adapter size number	Size	Cable range		L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
		Max dia	Min dia				
1	12	.337	.281	0.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	.281	.219	0.8750-0.1P-0.2L-DS	1.094	.765	5.00
3	14	.438	.400	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
4	16	.605	.511	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
5	16	.530	.436	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
6	16	.405	.316	1.1250-0.1P-0.2L-DS	1.344	.980	5.00
7	18	.699	.605	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
8	18	.625	.560	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
9	18	.455	.361	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
10	20	.828	.715	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
11	20	.562	.449	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
12	22	.900	.787	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
13	22	.750	.637	1.5000-0.1P-0.2L-DS	1.688	.980	6.00

APPROVED 25 May 1967 REVISED (A) ENTIRE STANDARD REVISED

User activities: Army - CG, MC, OS, SH
Navy -
Air Force - 14, 19

Review activities: Army - AR, MI
Navy - AS, YD
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - EC Other Cust Army - CR AF - 85	International interest	TITLE ADAPTER, (STRAIGHT THRU) CABLE SEALING AND GRIPPING	MILITARY STANDARD MS90571
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 5 OF 6

DD FORM 1 MAY 73 672 (Coordinated) Previous editions are obsolete.


Source: https://assist.dla.mil - Downloaded: 2020-10-23T20:39Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.062	1.57	.8750	22.225	1.3750	34.925	2.5000	63.500
.219	5.56	.875	22.23	1.375	34.93	2.562	65.07
.281	7.14	.880	22.35	1.406	35.71	2.719	69.06
.316	8.03	.900	22.86	1.437	36.51	2.844	72.24
.337	8.56	.938	23.83	1.445	36.53	2.935	74.55
.361	9.17	.980	24.89	1.469	37.31	3.248	82.50
.400	10.16	.984	24.99	1.5000	38.100	3.344	84.94
.405	10.29	1.0000	25.400	1.500	38.10	3.688	93.68
.436	11.07	1.000	25.40	1.531	38.74	3.712	94.28
.438	11.13	1.055	26.80	1.562	39.67	4.024	102.21
.449	11.40	1.062	26.97	1.6250	41.275	4.115	104.52
.455	11.56	1.094	27.79	1.625	41.28	4.150	105.41
.479	12.17	1.105	28.07	1.656	42.06	4.188	106.38
.511	12.98	1.109	28.17	1.688	42.88	4.212	106.98
.530	13.46	1.121	28.47	1.7500	44.450	4.275	108.59
.560	14.22	1.1250	28.575	1.750	44.45	4.344	110.34
.597	14.27	1.125	28.58	1.812	46.02	4.377	111.18
.316	15.16	1.180	29.97	1.8750	47.625	4.399	111.73
.605	15.38	1.185	30.10	1.875	47.63	4.688	119.08
.621	15.77	1.188	30.17	1.938	49.23	5.188	131.78
.625	15.88	1.219	30.96	2.0000	50.800	6.188	157.18
.637	16.18	1.230	31.24	2.000	50.80	6.688	169.88
.699	17.75	1.2500	31.750	2.062	52.37	7.188	182.58
.715	18.16	1.250	31.75	2.0625	52.387	7.688	195.28
.7500	19.050	1.312	33.32	2.219	56.36	8.188	207.98
.750	19.05	1.320	33.53	2.2500	57.150	8.688	220.68
.755	19.18	1.344	34.14	2.250	57.15	9.688	246.08
.765	19.43	1.370	34.80	2.312	58.42	10.688	271.48
.787	19.99	1.371	34.82	2.3125	58.74	11.688	296.88
.812	20.62	1.372	34.85	2.469	62.71	12.688	322.28
.871	22.12						

REQUIREMENTS:

1. Adapters are for use with classes R and C connectors shown on MS17343, MS17344, MS17345, and MS17347.
2. Adapter finish shall be designated by the letter C (conductive) or N (nonconductive).
3. Adapter assembly type shall be designated as A or B. Type A is for use with connector MS17344; type B is for use with connectors MS17343, MS17345, and MS17347. Adapter, cap, and chain is considered a complete assembly.
4. Part number shall include finish, adapter size number, and type as shown in example below:

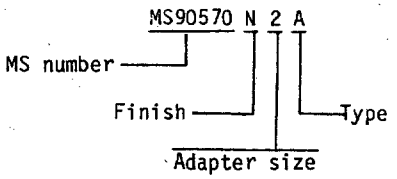

5. Chain shall be passivated corrosion resistant (stainless) steel in accordance with type II, class 3, trade number 8 of RR-C-271 and shall be within one link of length specified herein.

NOTES:

1. All dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ±.016 (0.41 mm).
4. It is intended that connectors and their associated accessories be of the same finish (see requirement 4).
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 25 May 1967 REVISED (A) ENTIRE STANDARD REVISED

User activities: Army - CG, MC, OS, SH
Navy - 14, 19
Air Force -

Review activities: Army - AR, MI
Navy - AS, YD
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	International interest	TITLE	MILITARY STANDARD
Navy - EC Other Cust Army - CR AF - 85		ADAPTER, (STRAIGHT THRU) CABLE SEALING AND GRIPPING	MS90571
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 6 OF 6

DD FORM 1 MAY 73 672 (Coordinated Electronics Associated Industries Document)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.