
FED. SUP. CLASS, 5306

MS9061 (ASG)

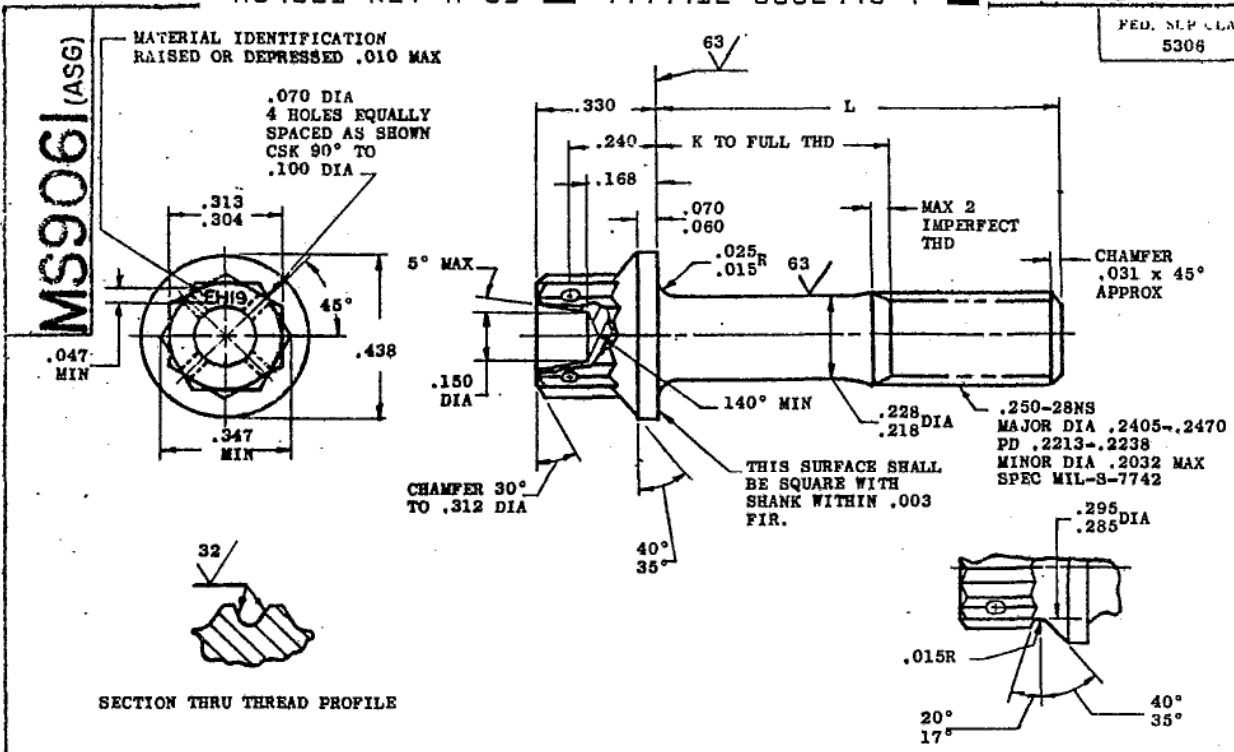

PART NO.	L	K +.000 -.060	APPROX WEIGHT LB /100	PART NO.	L	K +.000 -.060	APPROX WEIGHT LB /100	PART NO.	L	K +.000 -.060	APPROX WEIGHT LB /100
				MS9061-23	1.562	.812	2.50	MS9061-41	3.625	2.875	4.85
MS9061-06	.500	(a)	1.29	MS9061-24	1.625	.875	2.57	MS9061-42	3.750	3.000	4.99
MS9061-07	.562	(a)	1.36	MS9061-25	1.688	.938	2.64	MS9061-43	3.875	3.125	5.13
MS9061-08	.625	(a)	1.44	MS9061-26	1.750	1.000	2.72	MS9061-44	4.000	3.250	5.27
MS9061-09	.688	(a)	1.51	MS9061-27	1.875	1.125	2.86	MS9061-45	4.125	3.375	5.42
MS9061-10	.750	(a)	1.58	MS9061-28	2.000	1.250	3.00	MS9061-46	4.250	3.500	5.56
MS9061-11	.812	(a)	1.65	MS9061-29	2.125	1.375	3.14	MS9061-47	4.375	3.625	5.71
MS9061-12	.875	.125	1.72	MS9061-30	2.250	1.500	3.29	MS9061-48	4.500	3.750	5.85
MS9061-13	.938	.188	1.79	MS9061-31	2.375	1.625	3.43	MS9061-49	4.625	3.875	6.00
MS9061-14	1.000	.250	1.86	MS9061-32	2.500	1.750	3.57	MS9061-50	4.750	4.000	6.14
MS9061-15	1.062	.312	1.93	MS9061-33	2.625	1.875	3.71	MS9061-51	4.875	4.125	6.29
MS9061-16	1.125	.375	2.00	MS9061-34	2.750	2.000	3.85	MS9061-52	5.000	4.250	6.43
MS9061-17	1.188	.438	2.08	MS9061-35	2.875	2.125	4.00	MS9061-53	5.125	4.375	6.56
MS9061-18	1.250	.500	2.15	MS9061-36	3.000	2.250	4.14	MS9061-54	5.250	4.500	6.70
MS9061-19	1.312	.562	2.22	MS9061-37	3.125	2.375	4.29	MS9061-55	5.375	4.625	6.84
MS9061-20	1.375	.625	2.29	MS9061-38	3.250	2.500	4.43	MS9061-56	5.500	4.750	6.99
MS9061-21	1.438	.688	2.36	MS9061-39	3.375	2.625	4.58	MS9061-57	5.625	4.875	7.13
MS9061-22	1.500	.750	2.43	MS9061-40	3.500	2.750	4.72	MS9061-58	5.750	5.000	7.28
								MS9061-59	5.875	5.125	7.42
								MS9061-60	6.000	5.250	7.57

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .013 FIR.

MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735
MANUFACTURING SPECIFICATION: AMS 7478
PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645
SURFACE ROUGHNESS: AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°
DO NOT USE UNASSIGNED PART NUMBERS.

(A) INACTIVE FOR NEW DESIGN AFTER 31 DECEMBER 1963.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 15 Aug 60 REVISED (A) 20 Nov 63

CUSTODIANS	OTHER INT.
Navy - Wags USAF - ASD	A - N - AF -

MILITARY STANDARD

BOLT, MACHINE - CRES AMS5735, DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, .250-28

MS9061 (ASG)

PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET	OF
NONE		1	1

DD FORM 672-1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 20261023T13:09Z
Check the source to verify that this is the current version before use.