MIL-F-82D

27 March 1969
SUPERSEDING
MIL-F-82C
29 October 1964

MILITARY SPECIFICATION

FOOD CARRIER, INTERLOCKING POT, HAND; WITH FIVE 4-QUART POTS AND COVERS

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers a carrier frame into which five 4-quart pots with covers are stacked and interlocked.

* 1.2 Classification.- The carrier frames and pots with covers furnished under this specification shall be of the following items as specified (see 6.2).

Item I - Carrier frame with five 4-quart pots and covers.
Item II - 4-quart pot with cover.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-N-290 - Nickel Plating (Electrodeposited).
QQ-S-741 - Steel, Carbon: Structural Shapes, Plates, and Bars.
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 20260-16T04:42Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-10727 - Tin Plating - Electrodeposited or Hot Dipped, for Ferrous and Nonferrous Metals.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.
MS 20613 - Rivet, Solid-Universal Head, Steel, Carbon, and Steel, Corrosion-Resistant.

DRAWINGS

ARMY NATICK LABORATORIES

2-9-155 - Food Carrier, Interlocking Pot, Hand; with Five - 4-Quart Pots and Covers; Assembly, Complete.
2-9-156 - Food Carrier, Interlocking Pot, Hand; with Five - 4-Quart Pots and Covers; Frame Assembly and Details.
2-9-157 - Food Carrier, Interlocking Pot, Hand; with Five - 4-Quart Pots and Covers; Locking Device Assembly and Details.
2-9-158 - Food Carrier, Interlocking Pot, Hand; with Five - 4-Quart Pots and Covers; Pot and Cover Details.

(Miniature copy of Drawing 2-9-155, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T04:42Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

Specification A 167-63 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

Specification A 511-64 - Seamless Stainless Steel Mechanical Tubing.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19106.)

NATIONAL SANITATION FOUNDATION (NSF)

Standard No. 2 - Food Service Equipment

Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, P. O. Box 1468, Ann Arbor, Michigan 48106.)

NATIONAL CLASSIFICATION BOARD

National Motor Freight Classification

(Application for copies shall be addressed to the National Classification Board, 1616 P. Street, N. W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois, 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- When specified (see 6.2), before production is commenced, a sample food carrier or pot, as applicable shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

* 3.2 NSF Certification.- The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the pots and covers he proposes to furnish under this specification meet the applicable requirements of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the pots and covers shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment, or:

(2) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the pots and covers are being procured, indicating that the pots and covers have been tested and conform to NSF Standard No. 2, shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

3.3 Materials.- The materials shall conform to the applicable specifications and requirements specified hereinafter. Materials not definitely specified shall be of the quality normally used by the manufacturer for food handling equipment provided the completed item complies with all provisions of this specification.

3.3.1 Steel, corrosion-resisting.-

* 3.3.1.1 Sheet.- Corrosion-resisting steel sheet shall conform to type 302 or 304 of ASTM A 167-63.

* 3.3.1.2 Tube, seamless.- Corrosion-resisting steel tube shall conform to any of the steels listed in ASTM A 511-64.

3.3.2 Steel, carbon.- Carbon steel shall conform to QQ-S-741.

3.4 Design and construction.- The construction of all components and assemblies of the items covered herein shall conform to the requirements of this specification and as shown on Drawings 2-9-155 through 2-9-158.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T04:42Z
Check the source to verify that this is the currentversion before use.

3.4.1 Frame, carrier.- The carrier frame shall be fabricated from material specified in 3.3.2. The ring, item 2-2 on Drawing 2-9-156, shall be attached to the carrier frame by rivets. Riveting shall be accomplished in such a manner as to allow the ring to revolve.

* 3.4.2 Pot and cover.- Each pot and cover shall be seamless formed from material specified in 3.3.1.1. The handles for the pot shall be fabricated from tube specified in 3.3.1.2 having nominal 0.035 (20 gauge) thickness, and located as shown on Drawing 2-9-158.

3.4.3 Locking devices.- The food carrier shall have four sliding locking devices. The upper two shall be a combination lock for the top cover and pot, and the lower two for the pot only. The cam guide shall hold the locking device in any vertical position when the cam is not holding the locking device tight against the pot or top cover. The locking devices shall hold the pots and covers, when applicable, securely and shall be capable of holding from one to five pots.

3.5 Finish.- Sharp edges and corners, burrs, and slivers shall be removed. The pots, covers, and locking devices shall have a commercial number 4 or better finish. The carrier frame shall be nickel or tin plated. Nickel plating shall conform to class 2, type IV of QQ-N-290, and tin plating shall conform to type I or II of MIL-T-10727 with a plating thickness not less than 0.0003-inch.

3.6 Marking for identification.- The letters "U.S." in characters not less than 1/4 inch high and the manufacturer's name, trade name, or trademark readily identifiable with said manufacturer shall be indented centrally on the bottom of each pot, the top of each cover and on the inside of the carrier frame. The surface opposite these marks shall show no signs of unevenness, penetration, or distortion.

3.7 Workmanship.- The pots, covers, and carrier frame shall be clean and free of dents, cuts, and tool marks.

* 3.7.1 Metal fabrication.- All metal used in the fabrication of all components shall be free of kinks, unspecified bends, and slivers. Shearing shall be done neatly and accurately. Bends shall be made accurately to provide uniformity of size and shape.

* 3.7.2 Welding.- Surfaces of all parts to be welded shall have oxide, scale, grease, and other foreign matter removed. The finished welds shall be continuous, adherent, smooth, and free of cracks, pits, imbedded foreign material, flux, and scale. Welds shall be ground flush prior to assembling to the frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Institute of Applied

* 3.7.3 Riveting.- Holes for rivets shall be accurately punched or drilled. Rivets shall be tight and fully peened with heads in full contact with the riveted surfaces.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects listed in table I and for the dimensions specified.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.1.1 Tin or nickel coating.- Plating thickness of the carrier frame shall be tested for thickness in accordance with the applicable specification referenced in 3.4. The lot shall be the number of carrier frames offered for inspection at one time. The sample unit shall be one frame. The inspection level shall be S-1 with an acceptable quality level (AQL) of 6.5, expressed in terms of defects per hundred units.

* 4.3.2 End item inspection.- A lot shall consist of all food carriers with pots and covers or all pots and covers, as applicable, offered for inspection at one time. The sample unit shall be one completely fabricated carrier or pot with cover.

* 4.3.2.1 Visual examination.- The end item shall be examined for defects classified in table I. The inspection level shall be II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Sharp edges or corners, burr, or sliver.	X	
	Component not finished as specified.		X
Construction, design, and workmanship (carrier frame, pot, and cover)	Any part missing.	X	
	Any part fractured, punctured, dented, creased, bowed, malformed, kinked or contains unspecified sharp bends.	X	
	Any component not connected or joined as specified.	X	
Carrier frame	Sharp edges or projections which could mar the surfaces of pots or covers.	X	
Ring	Not free fit at frame (does not revolve)	X	
Locking device	Cam guide does not hold locking device in vertical position.	X	
Body, pot	Not rolled as specified.		X
Cover, pot	Not rolled as specified.		X
Welding	Not smooth, or contains pits, holes, or fissures.	X	
	Welds not fused with base metal.	X	
	Rough edges or projecting fins.	X	
	Scale, grease, or foreign matter not removed.	X	
Rivets	Not securely set.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Identification marking	Incomplete, illegible, missing, wrong size, or location.		X
	Not indented.	X	
	Metal penetrated.	X	
	Surface opposite markings distorted or uneven.		X

4.3.2.2 Dimensional examination.- Inspection shall be made of the carrier frame, pots and covers for compliance with dimensions specified herein and on the drawings. Any deviation from the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE II.- Preparation for delivery defects

Examination	Defect
Marking, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Content	Number per container is more or less than required.

4.3.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

4.4 Standard compliance.- The supplier shall have available for the Government representative, proof of compliance with the requirements of NSF Standard as required by 3.2.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each complete carrier, with all components secured in place, shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 200 of PPP-B-636. Box closure shall be in accordance with the appendix of PPP-B-636.

* 5.1.2 Level C.- The complete carriers shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.-

* 5.2.1.1 Complete carrier.- Four complete carriers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.1.2 Component packing when procured separately.-

* 5.2.1.2.1 Food pots and covers.- Twelve food pots with covers in place shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.1.1, except that the wall liner shall not be required. The food pots shall be arranged in stacks of 3 each, 2 in length and 2 in width. Each shipping container shall be provided with half slotted, full height fiberboard partitions, fabricated from material conforming to V3c of PPP-F-320, to provide individual cells for each stack of food pots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

5.2.1.2.2 Frames.- Ten frames, cushioned with corrugated fiberboard between frames to prevent abrasion, shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.1.1.

5.2.2 Level B.-

* 5.2.2.1 Complete carrier.- Four complete carriers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method III of the appendix of PPP-B-636.

5.2.2.2 Component packing when procured separately.-

5.2.2.2.1 Food pots and covers.- Twelve food pots with covers in place shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.2.1, except that the wall liner shall not be required. The food pots shall be arranged as specified in 5.2.1.2.2. Each shipping container shall be provided with half slotted, full height fiberboard partitions fabricated from the same material as the shipping container, to provide individual cells for each stack of food pots.

* 5.2.2.2.2 Frames.- Ten frames, cushioned with corrugated fiberboard between frames to prevent abrasion, shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.2.1.

* 5.2.2.3 When specified (see 6.2), the shipping container shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636. The shipping container material may also be grade V4s of PPP-F-320.

* 5.2.3 Level C.- Complete carriers, covers, frames, and food pots packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification rules or National Motor Freight rules, as applicable.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), complete carriers, covers, frames, and food pots packed as specified shall be palletized in accordance with Load Type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The food carriers covered by this specification are primarily used to carry prepared foods from cooking areas to eating areas in land installations and ships. A secondary use could be food storage where edibles require preliminary work prior to preparation for serving.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Item required (see 1.2).
(c) First article.- When preproduction sample is waived (see 3.1).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.3).
(e) When palletization is not required (see 5.3).
(f) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).

* 6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - SA, MC, MS
Air Force - 84, 85


User activity:
Navy - CG

Preparing activity:

Army - GL

Project No. 7330-0289

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

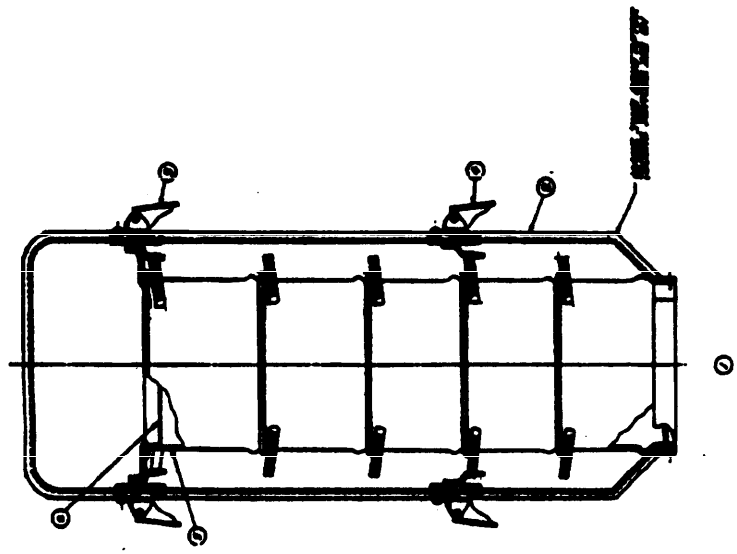

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-F-82D
Food Carrier, Interlocking Pot, Hand; with Five 4-Quart Pots and Covers

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD. FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:42Z
Check the source to verify that this is the current version before use.