
INCH-POUND
MIL-PRF-81/1G
3 June 2025
SUPERSEDING
MIL-PRF-81/1F
24 April 2017

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, VARIABLE, CERAMIC DIELECTRIC, STYLE CV11

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81.

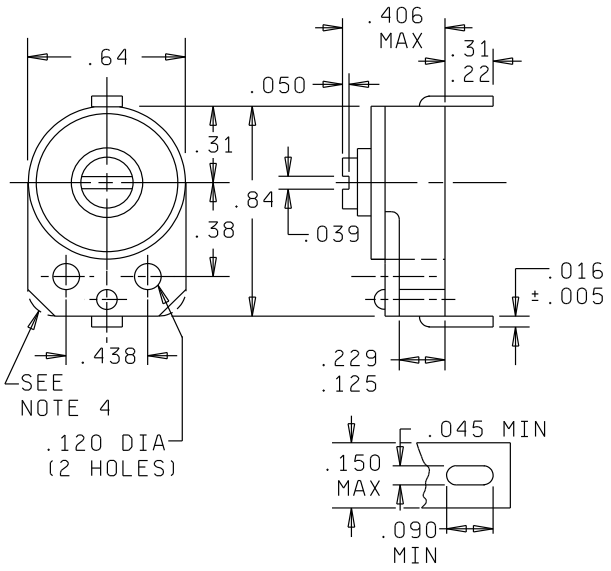

Inches	mm
.005	0.13
.016	0.41
.039	0.99
.045	1.14
.050	1.27
.090	2.29
.120	3.05
.125	3.18
.150	3.81
.22	5.59
.229	5.82
.31	7.87
.38	9.65
.406	10.31
.438	11.13
.64	16.26
.84	21.34

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Unless otherwise specified, tolerances are ± .03 inch (0.76 mm) for two decimal places and ± .010 inch (0.25 mm) for three decimal places.
4. Limiting dimensions as shown.

FIGURE 1. Dimensions and configurations.

AMSC N/A
FSC 5910

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Capacitance value: See table I.

DC rated voltage: See table I.

Operating temperature range: -55°C to +85°C.

Characteristics: See table I.

Dielectric withstanding voltage (DWV): In accordance with MIL-PRF-81, terminal to terminal.

TABLE I. Style CV11.

Part or Identifying Number (PIN)	Capacitance (pF)		DC rated voltage (volts)	Characteristics				
				Symbol	Capacitance change from value at +25°C			
					At -55°C		At +85°C	
	Minimum	Maximum			Minimum (percent)	Maximum (percent)	Minimum (percent)	Maximum (percent)
CV11A070	1.5	7.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11A120	3.0	12.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11A250	4.5	25.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11B130	3.0	13.0	500	B	-1.0	+3.5	-2.5	-0.5
CV11B200	5.0	20.0	500	B	-1.0	+3.5	-2.5	-0.5
CV11C300	4.0	30.0	500	C	-1.0	+6.5	-4.0	-1.0
CV11C450	7.0	45.0	500	C	-1.0	+6.5	-4.0	-1.0
CV11D060	2.0	6.0	500	D	+1.5	+8.2	-5.0	-1.5
CV11D300	4.0	30.0	500	D	+1.5	+8.2	-5.0	-1.5
CV11D450	7.0	45.0	500	D	+1.5	+8.2	-5.0	-1.5

Torque: Not less than 4 ounce-inches nor more than 24 ounce-inches.

Fatigue:

Torque: Not less than 4 ounce-inches nor more than 36 ounce-inches.

Moisture resistance:

Capacitance change: Shall not change more than ± 10 percent of initial value or 0.5 pF, whichever is greater.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:39Z
Check the source to verify that this is the current version before use.

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AR, MI
Air Force – 19

Preparing activity:
DLA - CC

(Project 5910-2025-028)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:39Z
Check the source to verify that this is the current version before use.