
INCH-POUND
MIL-PRF-81/4H
3 June 2025
SUPERSEDING
MIL-PRF-81/4G
24 April 2017

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, VARIABLE, CERAMIC DIELECTRIC, STYLES CV31 AND CV32

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81.

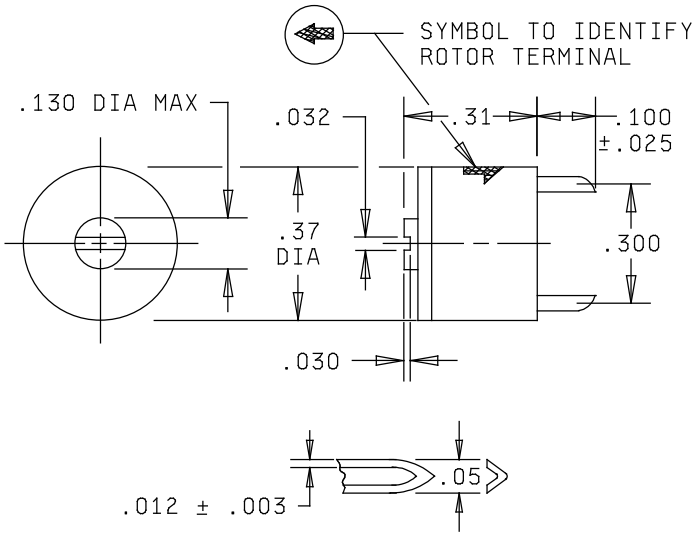

Style CV31

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:40Z
Check the source to verify that this is the current version before use.

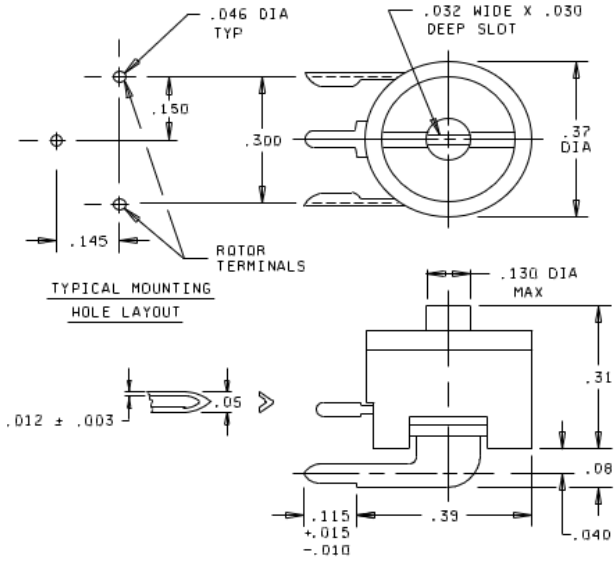

Inches	mm	Inches	mm
.003	0.08	.08	2.03
.01	0.25	.100	2.54
.012	0.30	.115	2.92
.015	0.38	.130	3.30
.025	0.64	.145	3.68
.030	0.76	.150	3.81
.032	0.81	.300	7.62
.040	1.02	.31	7.87
.046	1.17	.37	9.40
.05	1.27	.39	9.91

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Unless otherwise specified, tolerances are ± .02 inch (0.51 mm) for two-place decimals and ± .010 inch (0.25 mm) for three-place decimals.

Style CV32

FIGURE 1. Dimensions and configurations - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Capacitance value: See table I.

DC rated voltage: See table I.

Operating temperature range: -55°C to +125°C.

Characteristics: See table I.

TABLE I. Styles CV31 and CV32.

Part or Identifying Number (PIN) 1/	Capacitance (pF)		DC rated voltage (volts)	Characteristics				
				Symbol	Capacitance change from value at +25°C			
					At -55°C		At +85°C	
	Minimum	Maximum			Minimum (percent)	Maximum (percent)	Minimum (percent)	Maximum (percent)
CV3 - A080	2.0	8.0	350	A	-4.5	+2.0	-2.5	+2.0
CV3 - A180	5.5	18.0	350	A	-4.5	+2.0	-2.5	+2.0
CV3 - B110	2.5	11.0	350	B	-1.0	+3.5	-2.5	-0.5
CV3 - B250	7.0	25.0	350	B	-1.0	+3.5	-2.5	-0.5
CV3 - C100	3.0	10.0	350	C	-1.0	+6.5	-4.0	-1.0
CV3 - C250	8.0	25.0	350	C	-1.0	+6.5	-4.0	-1.0
CV3 - D150	3.0	15.0	200	D	+1.5	+8.2	-5.0	-1.5
CV3 - D350	9.0	35.0	200	D	+1.5	+8.2	-5.0	-1.5
CV3 - E600	15.0	60.0	200	E	+3.0	+14.0	-10.0	-3.0

1/ The complete PIN will include an additional digit to indicate style CV31 or CV32.

Dielectric withstanding voltage (DWV): In accordance with MIL-PRF-81, terminal to terminal.

Torque: Not less than 1 ounce-inch nor more than 6 ounce-inches.

Fatigue:

Torque: Not less than 1 ounce-inch nor more than 10 ounce-inches.

Life:

Capacitance change: Shall not exceed ± 8 percent of initial value or 0.5 pF, whichever is greater.

Changes from pervious issue: The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:40Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2025-029)

Review activity:
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:40Z
Check the source to verify that this is the current version before use.