
INCH-POUND
MIL-PRF-81/6G
24 April 2017
SUPERSEDING
MIL-PRF-81/6F
21 April 2011


PERFORMANCE SPECIFICATION SHEET

CAPACITOR, VARIABLE, CERAMIC DIELECTRIC, STYLES CV35 AND CV36

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81.

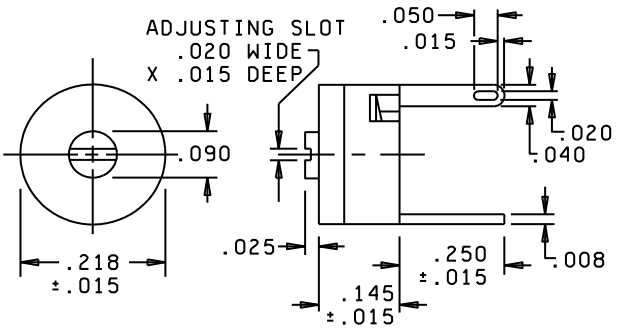




RECOMMENDED
MOUNTING HOLES

Inches	mm
.008	0.20
.015	0.38
.020	0.51
.025	0.64
.040	1.02
.065	1.65
.090	2.29
.145	3.68
.195	4.95
.218	5.54
.250	6.35

Style CV35

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:41Z
Check the source to verify that this is the current version before use.

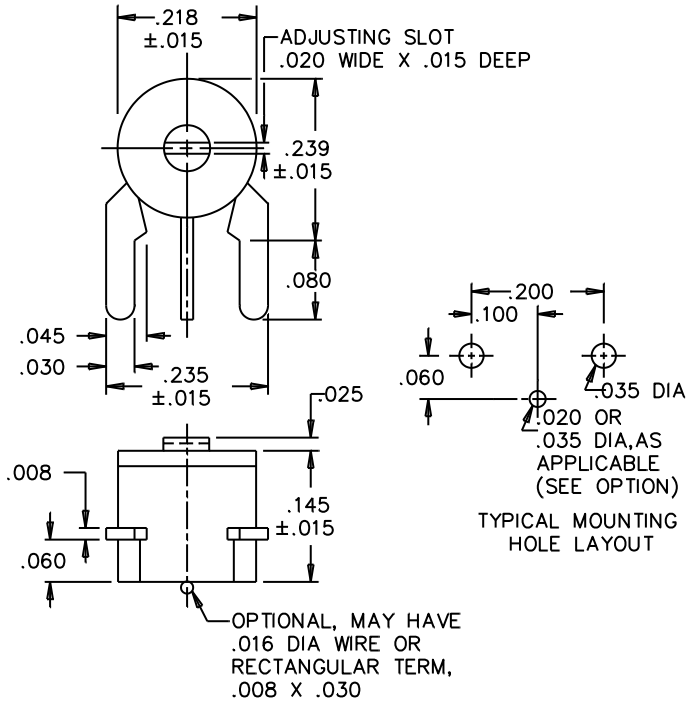

Inches	mm
.008	0.20
.015	0.38
.016	0.41
.020	0.51
.025	0.64
.030	0.76
.035	0.89
.045	1.14
.060	1.52
.080	2.03
.100	2.54
.145	3.68
.200	5.08
.218	5.54
.235	5.97
.239	6.07

Style CV36

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 inch.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Capacitance value: See table I.

DC rated voltage: See table I.

Operating temperature and storage range: -55°C to +125°C.

Characteristics: See table I.

Dielectric withstanding voltage (DWV): In accordance with MIL-PRF-81, terminal to terminal, except the magnitude of the test voltage shall be a dc potential of 200 V_{dc}.

TABLE I. Styles CV35 and CV36.

Part or Identifying Number (PIN) 1/	Capacitance (pF)		DC rated voltage (volts)	Characteristic						
				Symbol	Capacitance change from value at +25°C					
					At -55°C		At +85°C		At +125°C	
	Min.	Max.			Min. (percent)	Max. (percent)	Min. (percent)	Max. (percent)	Min. (percent)	Max. (percent)
CV35A030	1.0	3.0	100	A	-4.5	+2.0	-2.5	+2.0	-4.2	+3.4
CV36A030	1.25	3.0	100	A	-4.5	+2.0	-2.5	+2.0	-4.2	+3.4
CV3 - A050 2/	2.0	5.0	100	A	-4.5	+2.0	-2.5	+2.0	-4.2	+3.4
CV3 - A090	2.5	9.0	100	A	-4.5	+2.0	-2.5	+2.0	-4.2	+3.4
CV3 - A200	3.5	20.0	100	A	-4.5	+2.0	-2.5	+2.0	-4.2	+3.4
CV3 - A150 2/	5.0	15.0	100	A	-4.5	+2.0	-2.5	+2.0	-4.2	+3.4
CV3 - A250	5.0	25.0	100	A	-4.5	+2.0	-2.5	+2.0	-4.2	+3.4
CV3 - C400	7.0	40.0	100	C	-1.0	+6.5	-4.0	-1.0	-6.7	-1.7
CV3 - G400	7.0	40.0	25	G	-0.0	+14.0	-8.0	-3.0	-14.0	-5.0

1/ The complete PIN will include an additional character to indicate CV35 or CV36 (where applicable).
2/ Characteristic F is canceled without replacement.

Dissipation factor (DF):

Characteristic C and G: Shall be not more than 0.5 percent.

Torque: Not less than 0.3 ounce-inch nor more than 3 ounce-inches.

Vibration, high frequency:

DF: Shall be not more than 0.5 percent for characteristics C and G.

DWV:

Magnitude of test voltage: 200 volts dc.

Fatigue:

Torque: Not less than .3 ounce-inches, nor more than 3 ounce-inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:41Z
Check the source to verify that this is the current version before use.

Life:

Qualification test:

Capacitance change: Shall not exceed ±8 percent of initial value or 0.5 pF, whichever is greater.

Group C: Conditions and requirements are the same as that for qualification except that capacitance change shall not exceed ±5 percent of initial value or 0.5 pF, whichever is greater.

Moisture resistance:

DF: Shall not be more than 0.5 percent for characteristic A and 1.25 percent for characteristics C and G.

Changes from previous issue: The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activity:
Air Force – 19, 99

(Project 5910-2017-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:41Z
Check the source to verify that this is the current version before use.