INCH-POUND


MIL-PRF-27/59D
6 May 2005
SUPERSEDING
MIL-PRF-27/59C
7 February 1984

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, POWER, 100 VOLT AMPERES, 400 HZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the transformers described herein shall consist of this specification and MIL-PRF-27.

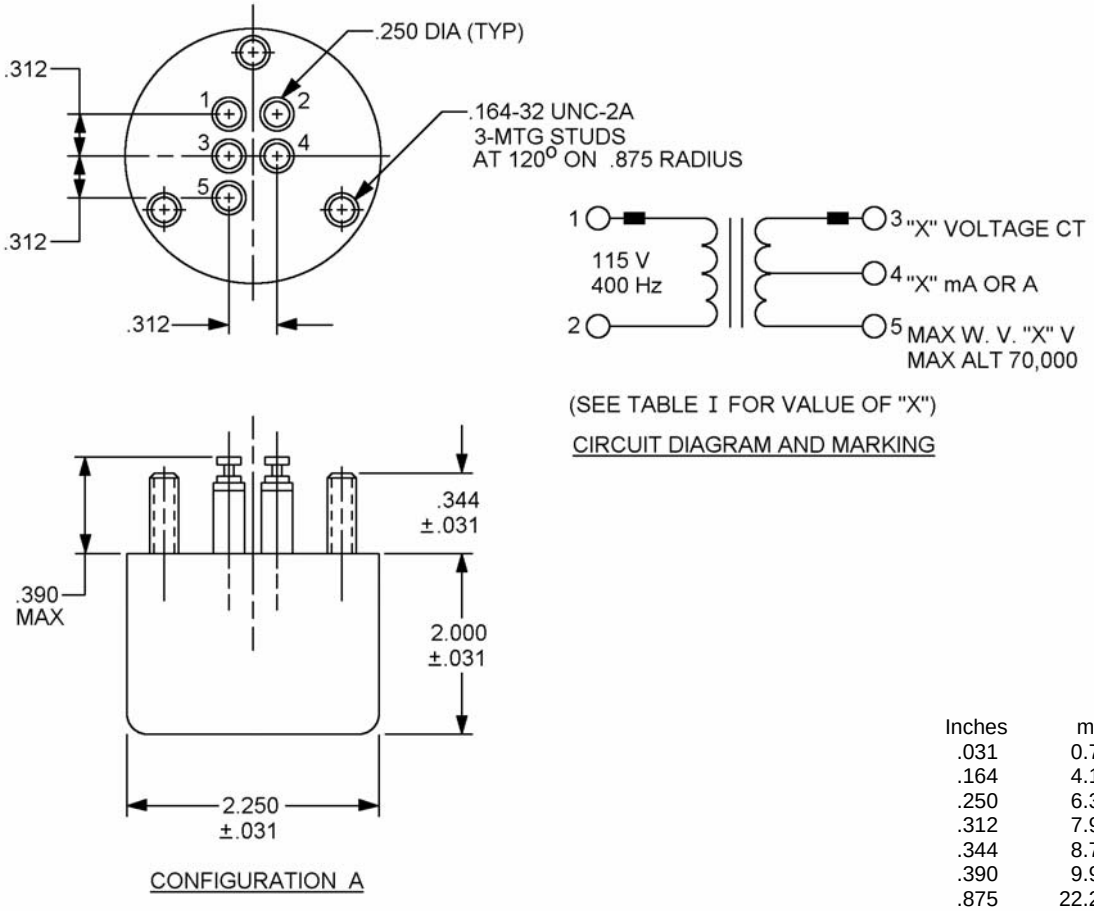

Inches	mm
.031	0.79
.164	4.17
.250	6.35
.312	7.92
.344	8.74
.390	9.91
.875	22.22
2.000	50.80
2.250	57.15

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:22Z
Check the source to verify that this is the current version before use.

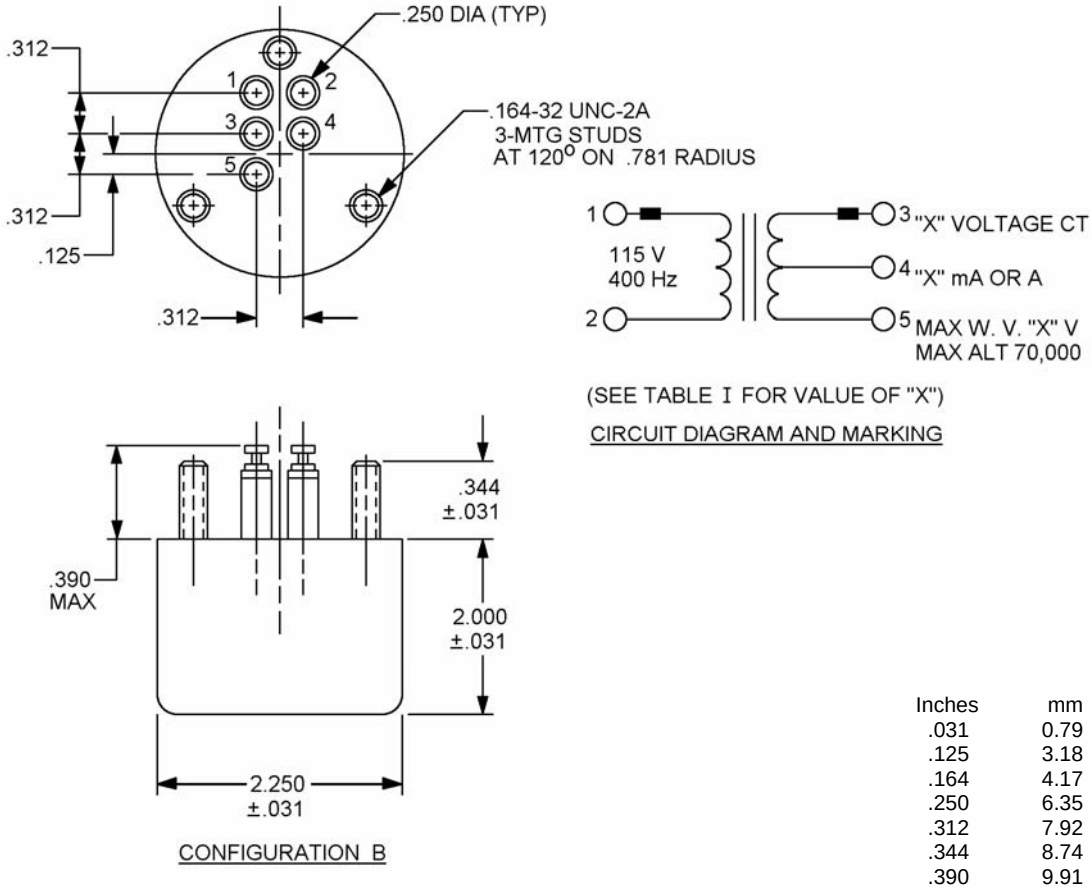

Inches	mm
.031	0.79
.125	3.18
.164	4.17
.250	6.35
.312	7.92
.344	8.74
.390	9.91
.781	19.84
2.000	50.80
2.250	57.15

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on terminal position dimensions is ±.015 (0.38 mm).
4. Marking shall be on the side of the case.
5. When numbers in parentheses, i.e. (1-2), are used, they indicate the winding and the extreme terminals of the winding.
6. Secondary electrical values shall be marked as specified in table I, as applicable.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses i.e. (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings: See table I.

Primary voltage (1-2): 115 volts ±10 percent, 400 Hz ±5 percent.

Design and construction:

Dimensions and configuration: See figure 1.

Weight: 18.7 ounces, maximum.

Duty cycle: Continuous.

Case: Metal enclosed (configuration A) or epoxy fiberglass enclosed (Configuration B).

Material: Steel (Configuration A) or epoxy fiberglass (Configuration B).

Altitude: 70,000 feet, maximum.

Operating temperature range: -55°C to +130°C maximum.

Terminals: Feed thru.

Terminal height: .390 inch (9.91 mm), maximum.

Terminal strength: Method 211 of MIL-STD-202, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 2.8 times the maximum working voltage specified in table I.

At reduced barometric pressure: 1.25 times the maximum working voltage specified in table I.

Electrical characteristics:

No load: With 115 volts, 400 Hz across (1-2): Current in (1-2) shall not exceed 75 mA rms.

Rated load: With 115 volts, 400 Hz across (1-2) and a resistive load with current as specified in table I in (3-5), the voltage across (3-5) shall be as specified in table I.

Efficiency: 93 percent minimum at rated load.

Polarity: Additive with terminals 2 and 3 connected.

Regulation: $\dfrac{Voltage\ (no\ load) - Voltage\ (rated\ load)}{Voltage\ (rated\ load)} \quad x \quad 100$

Shall not exceed 2.5 percent.

Phase shift: 1.0 electrical degree between primary and secondary voltage at rated load, maximum.

Temperature rise: 43°C, maximum with 115 volts, 400 Hz across (1-2) at ambient temperature of 87°C.

Vibration: MIL-STD-202, method 204, test condition D.

Marking location: See figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:22Z
Check the source to verify that this is the current version before use.

VERIFICATION:

Extent of qualification:

Qualification testing and approval to M27/49-44 A or B, M27/51-44 A or B, M27/53-44 A or B, M27/56-44 and M27/66-27 shall be sufficient to grant qualification approval to MIL-PRF-27/48 through MIL-PRF-27/66 inclusive, all parts.

Qualification testing and approval to M27/59-36 shall be sufficient to grant qualification approval to M27/59-01 through M27/59-36. Qualification testing and approval to M27/59-72 shall be sufficient to grant qualification approval to M27/59-37 through M27/59-72. Qualification testing and approval to M27/59-36 and M27/59-72 shall be sufficient to grant qualification approval to M27/59-01 through M27/59-72.

Part or Identifying Number (PIN) example:

M	27/59	-01
MIL specification item	Specification sheet no.	Dash no.

TABLE I. Electrical ratings.

Dash number	Secondary voltage (3-5) (V rms) ±3%	Secondary current (3-5) (amps rms)	Working voltage (V rms max)	Configuration
01	12	8.33	325	A
02	12.6	7.94	325	A
03	13	7.69	325	A
04	15	6.67	325	A
05	16	6.25	325	A
06	18	5.56	325	A
07	20	5.00	325	A
08	22	4.55	325	A
09	24	4.17	325	A
10	26	3.85	325	A
11	28	3.57	325	A
12	30	3.33	325	A
13	33	3.03	325	A
14	36	2.78	325	A
15	39	2.56	325	A
16	43	2.33	325	A
17	47	2.13	325	A
18	51	1.96	325	A
19	56	1.79	325	A
20	62	1.61	325	A
21	68	1.47	325	A
22	75	1.33	325	A
23	82	1.22	325	A
24	91	1.10	325	A
25	100	1.00	325	A
26	110	0.91	325	A
27	115	0.87	325	A
28	120	0.83	325	A
29	130	0.77	325	A
30	150	0.67	325	A
31	180	0.56	325	A
32	200	0.50	440	A
33	220	0.45	440	A
34	240	0.42	440	A
35	270	0.37	580	A
36	300	0.33	580	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings - Continued.

Dash number	Secondary voltage (3-5) (V rms) ±3%	Secondary current (3-5) (amps rms)	Working voltage (V rms max)	Configuration
37	12	8.33	325	B
38	12.6	7.94	325	B
39	13	7.69	325	B
40	15	6.67	325	B
41	16	6.25	325	B
42	18	5.56	325	B
43	20	5.00	325	B
44	22	4.55	325	B
45	24	4.17	325	B
46	26	3.85	325	B
47	28	3.57	325	B
48	30	3.33	325	B
49	33	3.03	325	B
50	36	2.78	325	B
51	39	2.56	325	B
52	43	2.33	325	B
53	47	2.13	325	B
54	51	1.96	325	B
55	56	1.79	325	B
56	62	1.61	325	B
57	68	1.47	325	B
58	75	1.33	325	B
59	82	1.22	325	B
60	91	1.10	325	B
61	100	1.00	325	B
62	110	0.91	325	B
63	115	0.87	325	B
64	120	0.83	325	B
65	130	0.77	325	B
66	150	0.67	325	B
67	180	0.56	325	B
68	200	0.50	440	B
69	220	0.45	440	B
70	240	0.42	440	B
71	270	0.37	580	B
72	300	0.33	580	B

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:22Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR
Navy – EC
Air Force – 11

Preparing activity:
DLA - CC

(Project 5950-1199)

Review activities:
Army – CR4, MI
Navy – AS, MC, OS
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:22Z
Check the source to verify that this is the current version before use.