INCH-POUND


MIL-PRF-27/64D
W/AMENDMENT 2
1 August 2022
SUPERSEDING
MIL-PRF-27/64D
W/AMENDMENT 1
12 August 2016

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, POWER, 75 VOLT AMPERES, 400 HZ, ELECTROSTATIC SHIELDED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the transformers described herein shall consist of this specification and MIL-PRF-27.

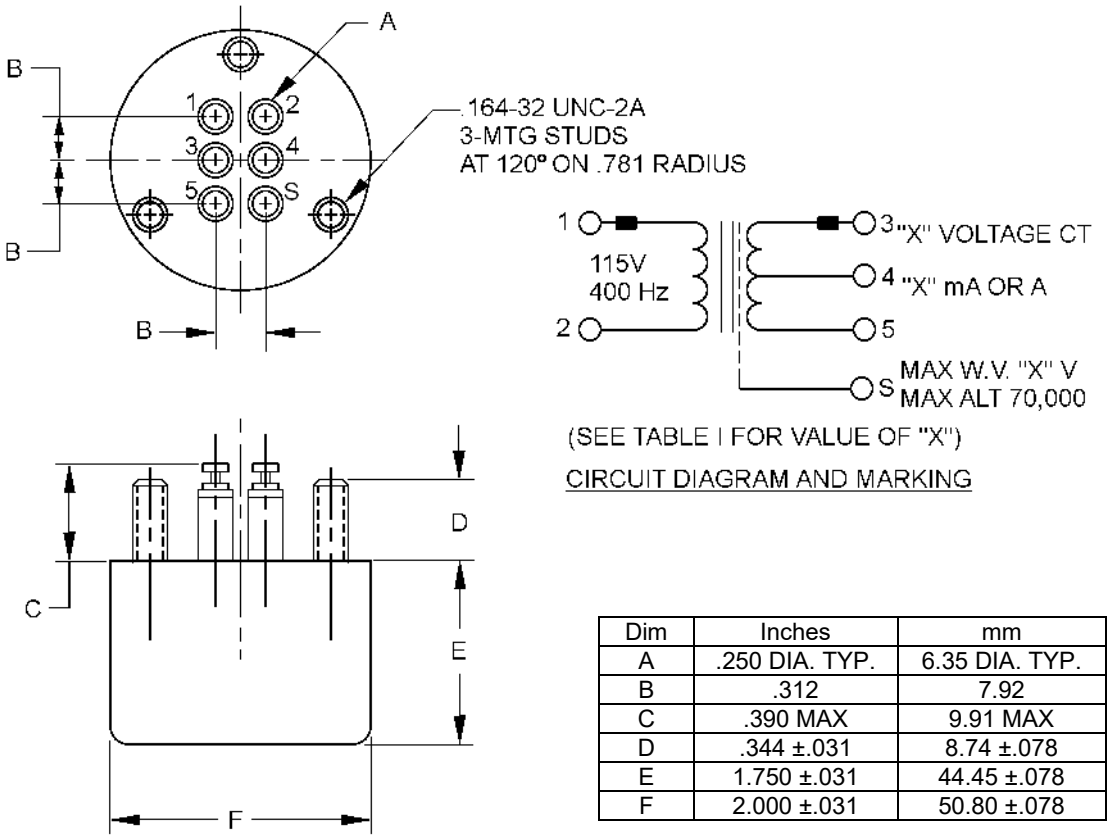

Dim	Inches	mm
A	.250 DIA. TYP.	6.35 DIA. TYP.
B	.312	7.92
C	.390 MAX	9.91 MAX
D	.344 ±.031	8.74 ±.078
E	1.750 ±.031	44.45 ±.078
F	2.000 ±.031	50.80 ±.078

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:23Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on terminal position dimensions is ±.015 (0.38 mm).
4. Marking shall be on the side of the case.
5. Terminals are color coded for permanent identification in addition to terminal marking shown. Ground terminal "S" is black.
6. Secondary electrical values shall be marked as specified in table I, as applicable.

FIGURE 1. Dimensions and configuration – continued.

REQUIREMENTS: (When numbers in parentheses i.e. (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings: See table I.

Primary voltage (1-2): 115 volts ±10 percent, 400 Hz ±5 percent.

Design and construction:

Dimensions and configuration: See figure 1.

Weight: 13.5 ounces, maximum.

Duty cycle: Continuous.

Case: Metal enclosed.

Material: Steel.

Altitude: 70,000 feet, maximum.

Operating temperature range: -55°C to +130°C maximum.

Terminals: Feed thru.

Terminal height: .390 inch (9.91 mm), maximum.

Terminal strength: MIL-STD-202-211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 2.8 times the maximum working voltage specified in table I.

At reduced barometric pressure: 1.25 times the maximum working voltage specified in table I.

Electrical characteristics:

No load: With 115 volts, 400 Hz across (1-2): Current in (1-2) shall not exceed 60 mA rms.

Rated load: With 115 volts, 400 Hz across (1-2) and a resistive load with current as specified in table I in (3-5), the voltage across (3-5) shall be as specified in table I.

Efficiency: 92 percent minimum at rated load.

Electrostatic shielding: The voltage ratio shall be a minimum of 5 to 1 at 20 kHz.

Polarity: Additive with terminals 2 and 3 connected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:23Z
Check the source to verify that this is the current version before use.

Regulation: $\frac{Voltage\ (no\ load) - Voltage\ (rated\ load)}{Voltage\ (rated\ load)} \quad x \quad 100$

Shall not exceed 3 percent.

Phase shift: 1.0 electrical degree between primary and secondary voltage at rated load, maximum.

Temperature rise: 40°C, maximum with 115 volts, 400 Hz across (1-2) at ambient temperature of 90°C.

Vibration: MIL-STD-202-204, test condition D.

Marking location: See figure 1.

VERIFICATION:

Extent of qualification:

Qualification testing and approval to M27/49-44 A or B, M27/51-44 A or B, M27/53-44 A or B, M27/56-44 and M27/66-27 shall be sufficient to grant qualification approval to MIL-PRF-27/48 through MIL-PRF-27/66 inclusive, all parts.

Qualification testing and approval to M27/64-38 shall be sufficient to grant qualification approval to M27/64-01 through M27/64-38.

Part or Identifying Number (PIN) example:

M	27/64	-01
MIL specification item	Specification sheet no.	Dash no.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:23Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Dash number	Secondary voltage (3-5) (V rms) ±3%	Secondary current (3-5) (amps rms)	Working voltage (V rms max)
01	10	7.50	325
02	11	6.82	325
03	12	6.25	325
04	12.6	5.95	325
05	13	5.77	325
06	15	5.00	325
07	16	4.69	325
08	18	4.17	325
09	20	3.75	325
10	22	3.41	325
11	24	3.13	325
12	26	2.89	325
13	28	2.68	325
14	30	2.50	325
15	33	2.27	325
16	36	2.08	325
17	39	1.92	325
18	43	1.74	325
19	47	1.60	325
20	51	1.47	325
21	56	1.34	325
22	62	1.21	325
23	68	1.10	325
24	75	1.00	325
25	82	0.92	325
26	91	0.82	325
27	100	0.75	325
28	110	0.68	325
29	115	0.65	325
30	120	0.63	325
31	130	0.58	325
32	150	0.50	325
33	180	0.42	325
34	200	0.38	440
35	220	0.34	440
36	240	0.31	440
37	270	0.28	580
38	300	0.25	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:23Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-PRF-27/48	MIL-PRF-27/49	MIL-PRF-27/50	MIL-PRF-27/51	MIL-PRF-27/52
MIL-PRF-27/53	MIL-PRF-27/54	MIL-PRF-27/55	MIL-PRF-27/56	MIL-PRF-27/57
MIL-PRF-27/58	MIL-PRF-27/59	MIL-PRF-27/60	MIL-PRF-27/61	MIL-PRF-27/62
MIL-PRF-27/63	MIL-PRF-27/65	MIL-PRF-27/66	MIL-STD-202-204	MIL-STD-202-211

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Review activities:
Army – CR4, MI
Navy – AS, MC, OS
Air Force – 19

Preparing activity:
DLA - CC

(Project 5950-2022-062)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:23Z
Check the source to verify that this is the current version before use.