MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, SHEILD TERMINATION, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

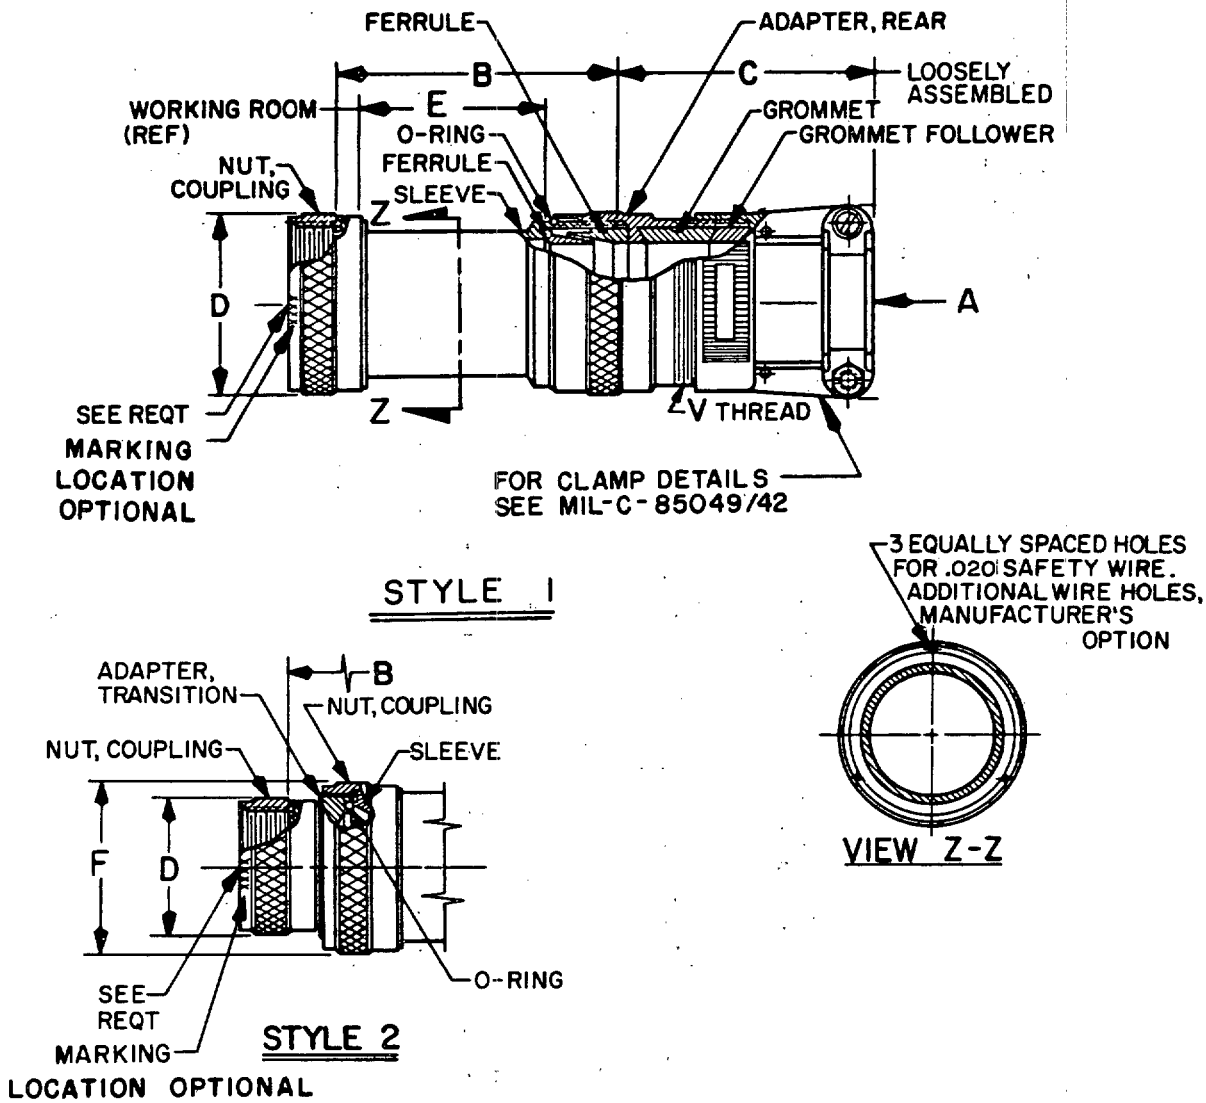


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
01	3				4	.125	.250	1	2.00	1.544	.669
02									3.00		
03					6	.250	.437	2	2.75	1.544	.669
04									3.75		
05		8	8S	8	4	.125	.250	1	2.00	1.544	.617
06									3.00		
07					6	.250	.437	2	2.75	1.544	.617
08									3.75		
09		10	10S,10SL	10	4	.125	.312	1	2.00	1.544	.734
10									3.00		
11					6	.250	.437	2	2.75	1.544	.734
12									3.75		
13	7	12	12,12S	12	6	.250	.437	1	2.00	1.544	.858
14									3.00		
15					10	.350	.625	2	2.75	1.844	.858
16									3.75		
17	12	14	14,14S	14	10	.350	.575	1	2.00	1.844	.984
18									3.00		
19					12	.500	.750	2	2.75	1.916	.984
20									3.75		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
01	1.06	.625-24 UNEF	—
02	2.06		
03	1.81	.750-20 UNEF	.858
04	2.81		
05	1.06	.625-24 UNEF	—
06	2.06		
07	1.81	.750-20 UNEF	.858
08	2.81		
09	1.06	.625-24 UNEF	—
10	2.06		
11	1.81	.750-20 UNEF	.858
12	2.81		
13	1.06	.750-20 UNEF	—
14	2.06		
15	1.67	1.000-20 UNEF	1.112
16	2.67		
17	0.92	1.000-20 UNEF	—
18	1.92		
19	1.67	1.187-18 UNEF	1.218
20	2.67		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
21	19	16	16,16S	16	12	.500	.700	1	2.00	1.916	1.112
22									3.00		
23					16	.625	.937	2	2.75	2.000	1.112
24									3.75		
25	27	18	18	18	10	.350	.625	1	2.00	1.844	1.218
26									3.00		
27					12	.500	.750	1	2.00	1.916	1.218
28									3.00		
29					16	.625	.937	2	2.75	2.000	1.218
30									3.75		
31	37	20	20	20	10	.350	.625	1	3.00	1.844	1.345
32									4.00		
33					12	.500	.750	1	3.00	1.916	1.345
34									4.00		
35					16	.625	.937	2	3.75	2.000	1.345
36									4.75		
37					20	.875	1.250	2	3.75	2.230	1.345
38									4.75		
39		22	22	22	10	.350	.625	1	3.00	1.844	1.468
40									4.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
21	0.92	1.187-18 UNEF	—
22	1.92		
23	1.67	1.437-18 UNEF	1.468
24	2.67		
25	0.92	1.000-20 UNEF	—
26	1.92		
27	0.92	1.187-18 UNEF	—
28	1.92		
29	1.67	1.437-18 UNEF	1.468
30	2.67		
31	1.92	1.000-20 UNEF	—
32	2.92		
33	1.92	1.187-18 UNEF	—
34	2.92		
35	2.67	1.437-18 UNEF	1.468
36	3.67		
37	2.67	1.750-18 UNS	1.969
38	3.67		
39	1.92	1.000-20 UNEF	—
40	2.92		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
41					12	.500	.750	1	3.00	1.916	1.468
42									4.00		
43					16	.625	.937	1	3.00	2.000	1.468
44		22	22	22					4.00		
45					20	.875	1.250	2	3.75	2.230	1.468
46									4.75		
47					12	.500	.750	1	3.00	1.916	1.593
48									4.00		
49					16	.625	.812	1	3.00	2.000	1.593
50									4.00		
51		24	24	24	16	.625	.937	1	3.00	2.000	1.593
52									4.00		
53					20	.875	1.250	2	3.75	2.230	1.593
54									4.75		
55					12	.500	.750	1	3.00	1.916	1.969
56									4.00		
57					16	.625	.937	1	3.00	2.000	1.969
58			28						4.00		
59					20	.875	1.250	1	3.00	2.230	1.969
60									4.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
41	1.92	1.187-18 UNEF	–
42	2.92		
43	1.92	1.437-18 UNEF	–
44	2.92		
45	2.67	1.750-18 UNS	1.969
46	3.67		
47	1.92	1.187-18 UNEF	–
48	2.92		
49	1.92	1.437-18 UNEF	–
50	2.92		
51	1.92	1.437-18 UNEF	–
52	2.92		
53	2.67	1.750-18 UNS	1.969
54	3.67		
55	1.92	1.187-18 UNEF	–
56	2.92		
57	1.92	1.437-18 UNEF	–
58	2.92		
59	1.92	1.750-18 UNS	–
60	2.92		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
61			28		24	1.000	1.375	1	3.00	1.500	1.969
62									4.00		
63			32		16	.625	.937	1	3.00	1.156	2.219
64									4.00		
65					20	.875	1.250	1	3.00	1.375	2.219
66									4.00		
67					24	1.000	1.375	1	3.00	1.500	2.219
68									4.00		
69					28	1.250	1.625	1	3.00	1.781	2.219
70									4.00		
71			36		20	.875	1.250	1	4.00	1.375	2.469
72									5.00		
73					24	1.000	1.375	1	4.00	1.500	2.469
74									5.00		
75					28	1.250	1.625	1	4.00	1.781	2.469
76									5.00		
77					32	1.437	1.875	2	4.88	1.830	2.469
78									5.88		
79			40		20	.875	1.250	1	4.00	1.375	2.719
80									5.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
61	1.92	2.000-18 UNS	-
62	2.92		
63	1.92	1.437-18 UNEF	-
64	2.92		
65	1.92	1.750-18 UNS	-
66	2.92		
67	1.92	2.000-18 UNS	-
68	2.92		
69	1.92	2.250-16 UN	-
70	2.92		
71	2.92	1.750-18 UNS	-
72	3.92		
73	2.92	2.000-18 UNS	-
74	3.92		
75	2.92	2.250-16 UN	-
76	3.92		
77	3.80	2.500-16 UN	2.719
78	4.80		
79	2.92	1.750-18 UNS	-
80	3.92		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
81			40		24	1.000	1.375	1	4.00	2.024	2.719
82									5.00		
83					28	1.250	1.625	1	4.00	2.550	2.719
84									5.00		
85					32	1.437	1.875	1	4.00	2.600	2.719
86									5.00		
87			44		20	.875	1.250	1	4.00	2.230	2.969
88									5.00		
89					24	1.000	1.375	1	4.00	2.024	2.969
90									5.00		
91					28	1.250	1.625	1	4.00	2.550	2.969
92									5.00		
93					32	1.437	1.875	1	4.00	2.600	2.969
94									5.00		
95			48		20	.875	1.250	1	4.00	2.230	3.219
96									5.00		
97					24	1.000	1.375	1	4.00	2.024	3.219
98									5.00		
99					28	1.250	1.625	1	4.00	2.550	3.219
100									5.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
81	2.92	2.000-18 UNS	-
82	3.92		
83	2.92	2.250-16 UN	-
84	3.92		
85	2.92	2.500-16 UN	-
86	3.92		
87	2.92	1.750-18 UNS	-
88	3.92		
89	2.92	2.000-18 UNS	-
90	3.92		
91	2.92	2.250-16 UN	-
92	3.92		
93	2.92	2.500-16 UN	-
94	3.92		
95	2.92	1.750-18 UNS	-
96	3.92		
97	2.92	2.000-18 UNS	-
98	3.92		
99	2.92	2.250-16 UN	-
100	3.92		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
101			48		32	1.437	1.875	1	4.00	2.600	3.219
102									5.00		
103	61				12	.500	.750	1	3.00	1.916	1.653
104									4.00		
105					16	.625	.937	1	3.00	2.000	1.653
106									4.00		
107					20	.875	1.250	2	3.75	2.230	1.653
108									4.75		
109					24	1.000	1.375	2	3.75	2.024	1.653
110									4.75		
111	7	12	12,12S	12	10	.350	.500	1	2.00	1.844	.858
112	19	16	16,16S	16	6	.250	.437	1	2.00	1.544	1.112
113									3.00		
114	7	12	12,12S	12	4	.125	.312	1	2.00	1.544	.858
115									3.00		
116	12	14	14,14S	14	6	.250	.437	1	2.00	1.544	.984
117									3.00		
118	19	16	16,16S	16	10	.350	.625	1	2.00	1.844	1.112
119									3.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
101	2.92	2.500-16 UN	–
102	3.92		
103	1.92	1.187-18 UNEF	–
104	2.92		
105	1.92	1.437-18 UNEF	–
106	2.92		
107	2.67	1.750-18 UNS	1.969
108	3.67		
109	2.67	2.000-18 UNS	1.969
110	3.67		
111	1.00	1.000-20 UNEF	–
112	1.00	.750-20 UNEF	–
113	2.00		
114	1.00	.625-24 UNEF	–
115	2.00		
116	1.00	.750-20 UNEF	–
117	2.00		
118	0.92	1.000-20 UNEF	–
119	1.92		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
120	27	18	18	18	4	.125	.312	1	2.00	1.544	1.218
121									3.00		
122					6	.250	.437	1	2.00	1.544	1.218
123									3.00		
124	37	20	20	20	6	.250	.437	1	3.00	1.544	1.345
125									4.00		
126		22	22	22	4	.125	.312	1	3.00	1.544	1.468
127									4.00		
128					6	.250	.437	1	3.00	1.544	1.468
129									4.00		
130		24	24	24	10	.350	.625	1	3.00	1.844	1.593
131									4.00		
132			36		12	.500	.750	1	4.00	1.916	2.469
133									5.00		
134			40		12	.500	.750	1	4.00	1.916	2.719
135									5.00		
136		10	10S,10SL	10	6	.250	.375	1	2.00	1.544	.734
137									3.00		
138	7	12	12,12S	12	10	.350	.500	1	2.00	1.844	.858
139									3.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
120	0.92	.625-24 UNEF	–
121	1.92		
122	0.92	.750-20 UNEF	–
123	1.92		
124	1.92	.750-20 UNEF	–
125	2.92		
126	1.92	.625-24 UNEF	–
127	2.92		
128	1.92	.750-20 UNEF	–
129	2.92		
130	1.92	1.000-20 UNEF	–
131	2.92		
132	2.92	1.187-18 UNEF	–
133	3.92		
134	2.92	1.187-18 UNEF	–
135	3.92		
136	1.06	.750-20 UNEF	–
137	2.06		
138	1.06	1.000-20 UNEF	–
139	2.06		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
140	37	20	20	20	16	.625	.904	1	3.00	2.000	1.345
141									4.00		
142		22	22	22	20	.875	1.029	1	3.00	2.230	1.468
143									4.00		
144		24	24	24	20	.875	1.144	1	3.00	2.230	1.593
145									4.00		
146			36		32	1.437	1.840	1	4.00	2.600	2.469
147									5.00		
148					16	.625	.937	1	4.00	2.000	2.469
149									5.00		
150	12	14	14,14S	14	4	.125	.312	1	2.00	1.544	.984
151									3.00		
152	19	16	16,16S	16	4	.125	.312	1	2.00	1.544	1.112
153									3.00		
154			44		16	.625	.937	1	4.00	2.000	2.969
155									5.00		
156			40		16	.625	.937	1	4.00	2.000	2.719
157									5.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
140	1.92	1.437-18 UNEF	-
141	2.92		
142	1.92	1.750-18 UNEF	-
143	2.92		
144	1.92	1.750-18 UNEF	-
145	2.92		
146	2.92	2.500-16 UNEF	-
147	3.92		
148	2.92	1.437-18 UNEF	-
149	3.92		
150	0.92	.625-24 UNEF	-
151	1.92		
152	0.92	.625-24 UNEF	-
153	1.92		
154	2.92	1.437-18 UNEF	-
155	3.92		
156	2.92	1.437-18 UNEF	-
157	3.92		

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.020	.51	1.750	44.45	2.230	56.64	3.75	95.2
.062	1.57	1.844	46.84	2.343	59.51	4.00	101.6
.937	23.80	1.916	48.67	2.550	64.77	4.75	120.6
1.125	28.58	2.000	50.80	2.600	66.04	4.88	124.0
1.312	33.32	2.024	51.41	2.750	69.85	5.00	127.0
1.531	38.89	2.093	53.16	3.000	76.20	5.88	149.4
1.544	39.22						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configurations: See figure 1.

Interface dimensions shall conform to MS3155 (design standard).

Material and finish:
Accessory components shall be as shown in table I.
Grommet and O-Ring: Silicone, per ZZ-R-765, class 3A or 3B.
Clamp assembly screws: 316 series corrosion resistant steel.

Cable sealing ranges: See table II.

TABLE I. Material and finish for accessory components.


Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	W 1/ N
Body	Corrosion resistant steel 316 series per QQ-S-763	B, S

1/ Not for Navy use.

TABLE II. Cable sealing ranges.

Dash number	Cable sealing range		Test plug diameter (inches)	
	Minimum Dia (inches)	Maximum Dia (inches)	Min	Max
02	.125	.250	.109	.125
06	.125	.250	.109	.125
10	.125	.312	.109	.125
14	.250	.437	.234	.250
18	.350	.575	.334	.350
22	.500	.700	.484	.500
26	.350	.625	.334	350
32	.350	.625	.334	.350
40	.350	.625	.334	.350
48	.500	.750	.484	.500
56	.500	.750	.484	.500
64	.625	.937	.609	.625
72	.875	1.250	.859	.875
80	.875	1.250	.859	.875
88	.875	1.250	.859	.875
96	.875	1.250	.859	.875

Part number: See example below:

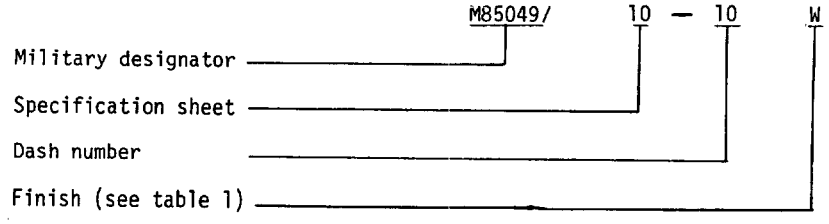

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.


Simplified assembly instructions shall be packaged with each accessory.

Applications:
a. These accessories are for shield termination and environmental applications. Armor shield termination and environmental applications may be achieved by reversing the ferrules and grommets.
b. Style 2 applies when the cable diameter exceeds the E diameter of MS3155.
c. For assembly instructions see figure 2 of MIL-C-85049/25.

Qualification:
See MIL-C-85049, category 1A.

QPL evaluation activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

Supersession data:

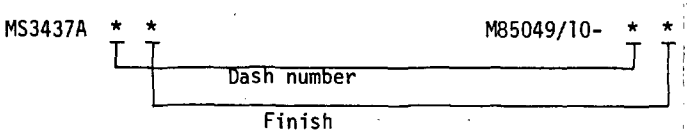

old	new
A and C	W
N	N
D	W
S	S
	B

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85049/10

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.