METRIC
MIL-PRF-62062C(AT)
12 February 1996
SUPERSEDING
MIL-B-62062B(AT)
28 April 1989

PERFORMANCE SPECIFICATION

BLOWER, GENERATOR COOLING: 28 VOLT DC

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of 28 volt (V) direct current (dc) blower designed for use in combination with a 300 ampere (A) generator on military tracked vehicles.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 2920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplements thereto cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-F-13927 - Fungus Resistance Test; Automotive Components.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
MIL-STD-461 - Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.
MIL-STD-462 - Electromagnetic Interference Characteristics Measurement of.
MIL-STD-889 - Dissimilar Metals.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ARMY

10889713 - Generator, Engine Accessory.
10889998 - Generator, Engine Accessory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

10898759 - Blower, Electrical Rotating Equipment.
10898795 - Generator, Engine Accessory.

(Copies of these drawings are available from the U.S. Army Tank-automotive and Armaments Command, AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AIR MOVEMENT & CONTROL ASSOCIATION INC. (AMCA)

AMCA 210 - Laboratory Methods of Testing Fans for Rating.

(Copies of AMCA Standards may be obtained from the Air Movement & Control Association Inc., 30 W. University, Arlington Heights, IL 60004-1893.)

AMERICAN SOCIETY FOR QUALITY CONTROL (ASQC)

ASQC Z1.4 - Sampling Procedures and Tables for Inspections by Attributes (DoD adopted).

(Copies of ASQC Standards may be obtained from the American Society for Quality Control, P.O. Box 305, 611 E. Wisconsin Ave., Milwaukee, WI 53201-4606.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B117 - Standard Practice for Operating Salt Spray (Fog) Testing Apparatus (DoD Adopted).
ASTM B633 - Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel (DoD Adopted).

(Copies of ASTM Standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a first article sample shall be subjected to the first article inspection in accordance with 4.3.

3.2 Materials. Materials used shall be in accordance with the manufacturer's materials specification for blowers. The materials shall be capable of meeting all of the operational and environmental requirements specified herein (see 4.8.1).

3.2.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs (see 4.8.1 and 6.4.1).

3.2.2 Dissimilar metals. Dissimilar metals as defined by MIL-STD-889 shall not be used in contact with each other. Where such contact is unavoidable, the metal shall be protected against electrolytic corrosion. When protection is used, it shall be of such type that a low impedance path is offered to radio frequency currents (see 4.8.1).

3.2.3 Metal treatments.

3.2.3.1 Ferrous surfaces. Ferrous metal surfaces shall be cleaned in accordance with best commercial practice (see 4.8.1 and 4.8.2).

3.2.3.2 Aluminum alloy surfaces. Aluminum surfaces shall be cleaned and treated or anodized in accordance with best commercial practice (see 4.8.1 and 4.8.2).

3.2.3.3 Zinc plated surfaces. Zinc plated surfaces shall conform to type II, class Fe/Zn 12 of ASTM B633 (see 4.8.1 and 4.8.2).

3.3 Design and construction. Unless otherwise specified (see 6.2), the blower shall be fabricated in accordance with drawing 10898759 and as specified herein (see 4.8.1 and 4.8.2).

3.3.1 Interchangeability. Blowers shall have external dimensions that fall within the envelope outline of Drawing 10898759. Electrical connectors, shafts and mounting dimensions and their locations shall conform to the detail requirements of the drawing. Military standard parts shall be used whenever possible (see 4.8.1 and 4.8.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

3.4 Performance.

3.4.1 Airflow. When operating at 25 ± 3 degrees Celsius (°C) with an input voltage of 27 V dc and an input current of not more than 14.5 A, the blower shall deliver not less than 4.2 cubic meters per minute (m^3/min) at 1.49 kilopascals (kPa) back pressure (see 4.8.3).

3.4.2 Electromagnetic compatibility. The blower shall meet the requirements of MIL-STD-461D limits CE102 and RE102-3 (see 4.8.4).

3.4.3 Dielectric strength. The blower shall withstand a voltage of 500 V root-mean-square (rms) at 60 cycles per second (cps) for 1 minute. There shall be no puncture of solid insulation, no continuing sparkover, no breakdown of dielectric material and no damage to the insulation sufficient to cause failure of the motor (see 4.8.5).

3.4.4 Environmental.

3.4.4.1 High temperature. The blower shall evidence no thrown solder, thrown impregnating compound, damaged insulation, raised armature windings, or raised commutator bars or other damage after storage and subsequent operation at 71 ± 3°C temperature (see 4.8.6.1).

3.4.4.2 Low temperature. The blower shall evidence no thrown solder, thrown impregnating compound, damaged insulation, raised armature windings, or raised commutator bars or other damage after storage and subsequent operation at -18 ± 3°C temperature (see 4.8.6.2).

3.4.4.3 Vibration. The blower shall show no loosening of parts, objectionable operating characteristics, noise, wear, physical distortion or failure of components during and after exposure to simple harmonic motion having an amplitude of 0.03 inch in the frequency range of 10 to 55 Hertz (Hz) to 10 Hz with a sweep time of 1 minute (see 4.8.6.3). After being subjected to the vibration, the blower shall meet the requirements of 3.4.1.

3.4.4.4 Shock. The blower shall show no change in physical, electrical, or material characteristics after exposure to a sawtooth shock pulse of 30 gravity units (g) for 11 milliseconds (ms) (see 4.8.6.4). After being subjected to the shock, the blower shall meet the requirements of 3.4.1.

3.4.4.5 Sand and dust. After exposure to fine dust (up to 150 microns in size) blown at 762 ± 152 meters per minute (m/min) (see 4.8.6.5), the blower shall meet the requirements of 3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

3.4.4.6 Corrosion resistance. The blower shall evidence no damage affecting its operation and shall meet the requirements of 3.4.1 after exposure to salt spray consisting of 5 ± 1 parts per mass of sodium chloride dissolved in 95 parts of water (see 4.8.6.6) for 200 hours.

3.4.4.7 Fungus resistance. After prolonged exposure to the test organisms aspergillus flavus, aspergillus versi color, aspergillus niger, penicillium funiculosum, and chaetomium globosum, the blower shall evidence no microbial growth that would adversely affect its performance and shall subsequently meet the requirements of 3.4.1 (see 4.8.6.7).

3.4.5 Endurance. The blower shall operate satisfactorily for 1000 continuous hours at 27 V while delivering not less than 4.2 m^3/min of air at 1.49 kPa back pressure (see 4.8.7).

3.5 Painting. All exterior surfaces of the blower, except the electrical connections and the mating surfaces at the blower end, shall be primed and painted in accordance with best commercial practice (see 4.8.2).

3.6 Identification and marking.

3.6.1 Nameplate. Each blower shall have a nameplate affixed to the blower exterior as specified on the drawing (see 3.3) or, if not specified, in a conspicuous place. All nameplates shall include the following information as a minimum (see 4.8.2):

Blower, 28 V dc
Military part number
Federal stock number
Manufacturer's identification
Manufacturer's serial number
US

3.7 Workmanship. The workmanship shall be such as to assure a product free of rust, burrs, and scratches. All electrical connections shall be mechanically secured before being soldered or brazed to preclude the possibility of becoming loose due to vibration or shock. All solder cleaning agents and flux shall be noncorrosive. All traces of flux shall be chemically neutralized and removed after soldering (see 4.8.2).

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:13Z
Check the source to verify that this is the currentversion before use.

a. First article inspection (see 4.3).
   1. Preproduction inspection (see 4.3.1).
   2. Initial production inspection (see 4.3.2).
b. Conformance inspection (see 4.4).
   1. Examinations (see 4.5).
   2. Tests (see 4.6).
c. Control tests (see 4.7).

4.2 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature: 23 ± 10°C.
b. Barometric pressure: 725 (+50, -75) mm mercury (Hg).
c. Relative humidity: 50 ± 30 percent.

4.3 First article inspection. Unless otherwise specified (see 6.2), first article inspection shall be performed on preproduction or initial production samples as specified herein.

4.3.1 Preproduction inspection. When specified (see 6.2), the preproduction sample shall consist of four blowers. Preproduction inspection shall consist of inspection as specified in table I in the order specified in table II.

4.3.2 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select four blowers produced under the production contract for initial production inspection. Initial production units shall be inspected as specified in table I in the order specified in table II.

TABLE I. Classification of inspection.

Title	Requirement	Inspection	First article inspection				Conformance inspection		Control
			Sample units				Examination	Tests acceptance (100%)	
			1	2	3	4			
Materials and construction	3.2, 3.2.2 thru 3.3.1	4.8.1	X	X	X	X			
Defects (see table III)	3.2.3 thru 3.3.1, 3.5, 3.6 and 3.7	4.8.2	X	X	X	X	X		
Airflow	3.4.1	4.8.3	X					X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of inspection - Continued.

Title	Requirement	Inspection	First article inspection				Conformance inspection		Control
			Sample units				Examination	Tests acceptance (100%)	
			1	2	3	4			
Electromagnetic compatibility	3.4.2	4.8.4		X					
Dielectric strength	3.4.3	4.8.5	X		X	X			X
High temperature	3.4.4.1	4.8.6.1	X		X				
Low temperature	3.4.4.2	4.8.6.2	X			X			
Vibration	3.4.4.3	4.8.6.3	X			X			X
Shock	3.4.4.4	4.8.6.4	X			X			X
Sand and dust	3.4.4.5	4.8.6.5				X			
Corrosion resistance	3.4.4.6	4.8.6.6				X			
Fungus resistance	3.4.4.7	4.8.6.7			X				
Endurance	3.4.5	4.8.7	X						

TABLE II. Order of preproduction testing.

Sample	Inspection	Title
1	4.8.5	Dielectric strength
	4.8.6.1	High temperature
	4.8.6.2	Low temperature
	4.8.6.3	Vibration
	4.8.6.4	Shock
	4.8.7	Endurance
	4.8.3	Airflow
2	4.8.4	Electromagnetic compatibility
3	4.8.5	Dielectric strength
	4.8.6.1	High temperature
	4.8.6.7	Fungus resistance
4	4.8.5	Dielectric strength
	4.8.6.2	Low temperature
	4.8.6.3	Vibration
	4.8.6.6	Corrosion resistance
	4.8.6.4	Shock
	4.8.6.5	Sand and dust

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:13Z
Check the source to verify that this is the current version before use.

TABLE III. Order of initial production testing.

Inspection	Title
4.8.5	Dielectric strength
4.8.6.1	High temperature
4.8.6.2	Low temperature
4.8.6.3	Vibration
4.8.6.4	Shock
4.8.7	Endurance
4.8.3	Airflow

4.4 Conformance inspection. Conformance inspection shall include the examinations of 4.5 and the tests of 4.6 and 4.7.

4.5 Examination.

4.5.1 Sampling. Samples from an inspection lot for conformance inspection shall be selected in accordance with ASQC Z1.4. Each sample selected shall be inspected as specified herein for the defects listed in table IV. Conformance to a lot shall be accepted when zero (0) defects are found and rejected when one (1) or more defects are found.

TABLE IV. Classification of defects.

Category	Defect	Method of examination
Critical	None	
Major:		
101	Nonconformance in design and construction (see 3.3 thru 3.3.1).	Visual
102	Incorrect dimensions affecting interchangeability (see 3.3 and 3.3.1).	Visual and SIE 1/
103	Defective leads and connectors (see 3.3.1).	Visual
104	Motor position alignment incorrect after shrunk fit assembly (see 3.3).	Visual and SIE 1/
105	Faulty workmanship affecting performance (see 3.7).	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects - Continued.

Category	Defect	Method of examination
Minor:		
201	Incorrect dimension not affecting interchangeability (see 3.3 and 3.3.1).	SIE 1/
202	Improper finish (see 3.2.3 and 3.5).	Visual
203	Improper marking (see 3.6).	Visual
204	Faulty workmanship affecting appearance (see 3.2.3 and 3.6).	Visual

1/ SIE = Standard Inspection Equipment.

4.6 Acceptance tests (100 percent). Each blower shall be subjected to the test specified in table I. Failure of the test shall be cause for rejection.

4.7 Control tests. Control tests shall be conducted on one blower from each lot of 400 units consecutively produced, except that not more than 2 blower tests shall be conducted in a 2 month period. The blowers shall be subjected to the tests specified in table I.

4.8 Method of inspection.

4.8.1 Materials and construction. Conformance to 3.2 through 3.2.3 and 3.3.1 shall be determined by inspection of contractor records providing proof or certification that design, construction, processing and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.8.2 Defects. Conformance to 3.2.3 through 3.3.1 shall be determined by examination for the defects listed in table IV, and 3.5 through 3.7. Examination shall be visual or by measurement with Standard Inspection Equipment (SIE).

4.8.3 Airflow. To determine conformance to 3.4.1, the blower shall be subjected to the applicable airflow test procedures of AMCA standard 210.

4.8.4 Electromagnetic compatibility. To determine conformance to 3.4.2, the blower shall be tested in accordance with MIL-STD-462D.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:13Z
Check the source to verify that this is the currentversion before use.

4.8.5 Dielectric strength. To determine conformance to 3.4.3, the potential shall be applied to the armature and field terminals with the ground brush raised off the commutator and with the field ground disconnected. Capacitors incorporated in the motor circuit shall be disconnected during the test. Disassembly shall be required for ungrounding and examination. After the examination, the blower shall be reassembled and subjected to testing as specified in 4.8.3.

4.8.6 Environmental.

4.8.6.1 High temperature. To determine conformance to 3.4.4.1, the blower shall be stored in a test chamber at 71 ± 3°C for a period of 24 hours. The blower shall then be operated for a period of four hours at the 71 ± 3°C temperature. During operation the voltage input to the blower shall be between 27 and 29 V with the input to the blower at not more than 14.5 A.


4.8.6.2 Low temperature. To determine conformance to 3.4.4.2, the blower shall be stored in a test chamber at -18 ± 3°C for a period of 24 hours. The blower shall then be operated for a period of four hours at the -18 ± 3°C temperature. During operation the voltage input to the blower shall be between 27 and 29 V with the input to the blower at not more than 14.5 A.

4.8.6.3 Vibration. To determine conformance to 3.4.4.3, the blower shall be mounted rigidly along any of the principal axes using a mounting apparatus which is free from resonances over the test frequency range. The blower shall be subjected to a simple harmonic motion having an amplitude of 0.03 inch (0.06-inch maximum total excursion), the frequency being varied uniformly between the approximate limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for a period of 24 hours in each of 3 mutually perpendicular directions (total 72 hours). During the latter 1/2 hour of each two hour period of vibration the blower shall be operated continuously at full load speed. Full load speed shall be obtained by adjustment of the line voltage to 28.5 V.

4.8.6.4 Shock. To determine conformance to 3.4.4.4, subject the blower to a sawtooth waveform shock pulse with a 30 g peak value and a duration of 11 ms. The waveform shall conform to figure 1. The velocity change (Vi) shall be 1.62 m/sec. After having been subjected to the test specified in 4.8.3, the blower shall be disassembled and examined to determine conformance to 3.4.4.1 through 3.4.4.4.

4.8.6.5 Sand and dust. To determine conformance to 3.4.4.5, the blower shall be subjected to the test specified in method 110A of MIL-STD-202F except that chamber air speed shall be 762 ± 152 m/min.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:13Z
Check the source to verify that this is the current version before use.

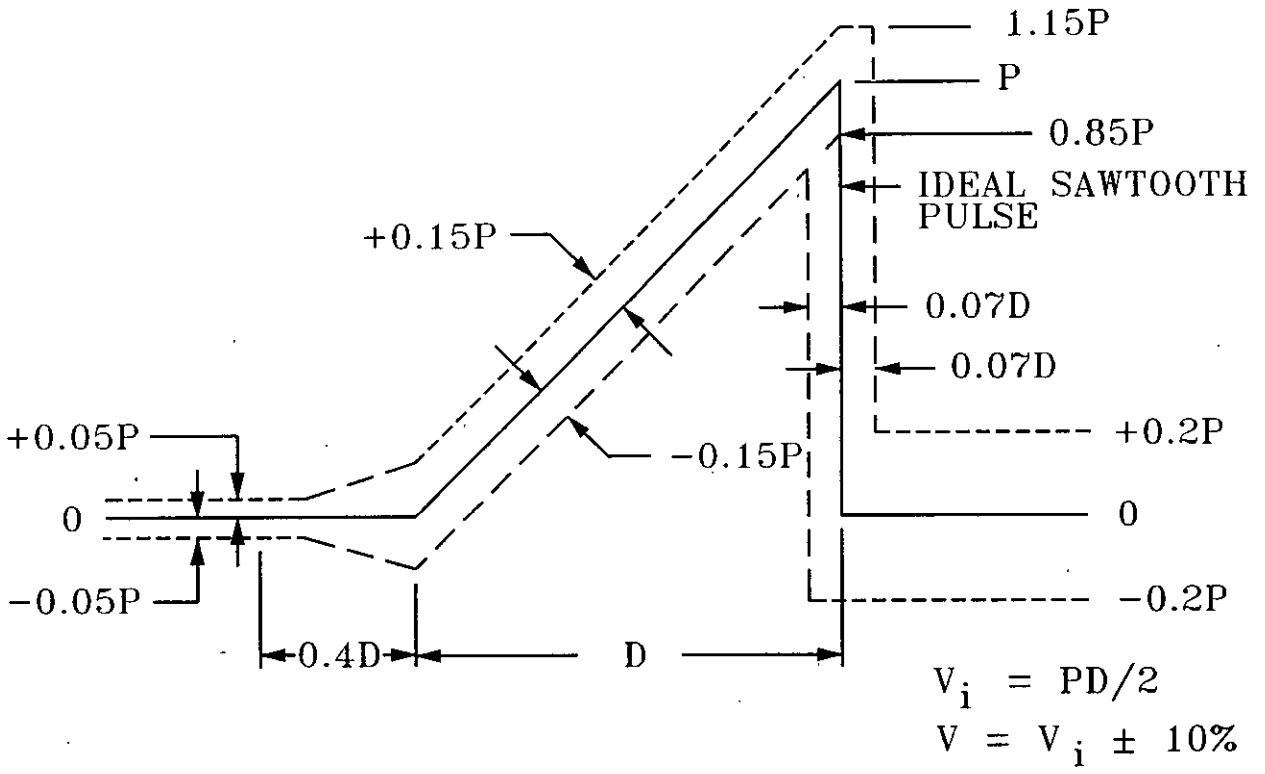

NOTE:
The oscillogram should include a time about 3D long with the pulse approximately in the center. The integration to determine the velocity change should extend from .4D before the pulse to .1D beyond the pulse. The peak acceleration magnitude of the sawtooth pulse is P and its duration is D. Any measured acceleration pulse which can be contained between the broken line boundaries is a nominal terminal-peak sawtooth pulse of nominal peak value, P, and nominal duration, D. The velocity-change associated with the measured acceleration pulse is V.

FIGURE 1. Tolerances for terminal-peak sawtooth shock pulse.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

4.8.6.6 Corrosion resistance. To determine conformance to 3.4.4.6, the blower shall be tested in accordance with the salt spray test specified in ASTM B117, except that the length of the test shall be 200 hours. After the corrosion test the blower shall be operated for one hour at 27 V before being subjected to the test specified in 4.8.3.

4.8.6.7 Fungus resistance. To determine conformance to 3.4.4.7, the blower shall be tested in accordance with class 2, method B of MIL-F-13927 except that the test period shall be a continuous 90 days. The blower shall be removed from the test cabinet without disassembly and without disturbing any fungus growths that have developed. Upon completion of the examination and replacement of access port covers, the blower shall be operated for one hour at 27 V before being subjected to the test specified in 4.8.3.

4.8.7 Endurance. To determine conformance to 3.4.5, the blower shall be subjected to continuous operation through the following test sequence:

a. 700 hours at 25 ± 3°C ambient temperature, 27 V input, motor axis horizontal.
b. 150 hours at 25 ± 3°C ambient temperature, 27 V input, motor axis 45 degrees, commutator down.
c. 150 hours at 25 ± 3°C ambient temperature, 27 V input, motor axis 45 degrees, commutator up.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Blowers covered by this specification are intended for use in combination with basic generator Drawing 10898795 and varying duct configurations on the M88 vehicle (see Drawing 10889998) and the M60A1 tank (see Drawing 10889713).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
c. If first article inspection is not required (see 3.1 and 4.3).
d. Title, number, and date of drawing, if other than as specified (see 3.3).
e. If inspection conditions are other than specified (see 4.2).
f. If preproduction inspection is required (see 4.3.1).
g. If preproduction inspection sample size shall be other than as specified (see 4.3.1).
h. If initial production inspection is not required (see 4.3.2).
i. If initial production inspection sample size shall be other than as specified (see 4.3.2).
j. Packaging requirements (see 5.1).

6.3 Supersession data. This performance specification supersedes MIL-B-62062B(AT), dated 28 April 1989.

6.4 Definitions.

6.4.1 Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (see 6.4.2).

6.4.2 Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C. 1342 et seq.) or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.5 Subject term (key word) listing.

Airflow
Corrosion resistance
Dielectric strength
Electromagnetic compatibility
Fungus resistance
Interchangeability

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Review activity:
DLA - CS

Preparing activity:
Army - AT

(Project 2920-0464)

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2. 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-PRF-62062C(AT)	960212

3. DOCUMENT TITLE

BLOWER, GENERATOR COOLING: 28 VOLT DC

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
	(810) 574-8745	786-8745
c. ADDRESS (Include Zip Code) Commander U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2024-07-07 07:52
Check the source to verify that this is the current version before use.