

MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE
(FOR MIL-S-12883/44, MIL-S-12883/45, and MIL-S-12883/46 RELAY SOCKETS)


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

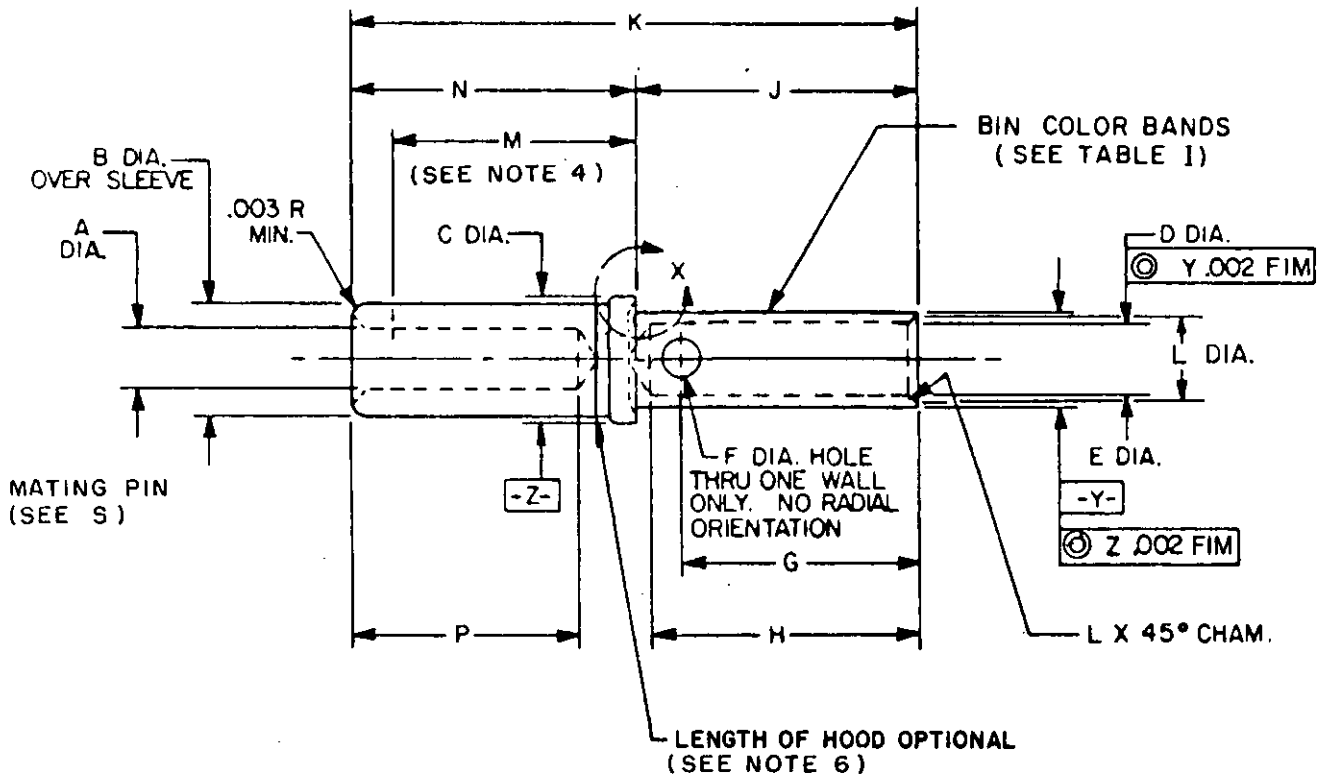

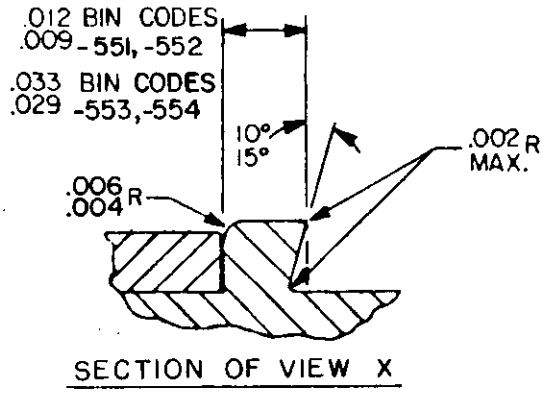

SECTION OF VIEW X

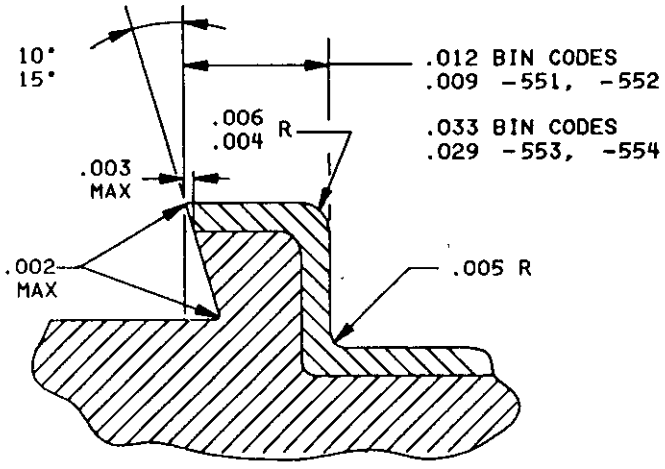

Optional configuration

FIGURE 1. Socket contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions shown apply after plating.
4. Distance between rear of contact shoulder and point at which a gauge pin, of same basic diameter as mating pin contact and a square face, first engages socket contact spring member.
5. Axial concentricity: All diameters to be concentric within .004 FIM except as noted.
6. Maximum cap of .010 inch (0.25 mm) between hood and body of the contact.

INCHES	MM	INCHES	MM	INCHES	MM
.002	0.05	.0390	0.991	.0835	2.121
.003	0.08	.0400	1.016	.0855	2.172
.004	0.10	.0410	1.041	.091	2.31
.005	0.13	.042	1.07	.094	2.39
.006	0.15	.0420	1.066	.101	2.57
.009	0.23	.044	1.12	.103	2.62
.012	0.30	.046	1.17	.108	2.74
.018	0.46	.0465	1.181	.120	3.05
.0180	0.457	.048	1.22	.127	3.23
.0200	0.508	.0480	1.219	.130	3.30
.022	0.56	.0570	1.448	.137	3.48
.023	0.58	.0590	1.499	.139	3.53
.027	0.69	.060	1.52	.145	3.68
.029	0.74	.0600	1.524	.150	3.81
.0290	0.737	.0610	1.549	.158	4.01
.031	0.79	.0615	1.562	.160	4.06
.0310	0.787	.0630	1.600	.166	4.22
.0320	0.813	.064	1.63	.170	4.32
.033	0.84	.066	1.68	.175	4.44
.0335	0.851	.068	1.73	.180	4.57
.0340	0.864	.070	1.78	.188	4.78
.0355	0.902	.076	1.93	.327	8.31
				.349	8.86

Dimensions.

BIN Code	A Dia	B Max Dia	C Dia	D Dia	E Dia	F Dia	G	H	J	K Ref	L Dia	M Min	N	P	Test Pin Gauge Dia
551	.033 .031	.060	.0615 .0600	.0200 .0180	.0480 .0465	.022 .018	.145 .139	.175 .160	.170 .160	.327	.0340 .0320	.130	.166 .158	.137 .120	.0310 .0290
552	.033 .031	.060	.0615 .0600	.0355 .0335	.0480 .0465	.022 .018	.145 .139	.175 .160	.170 .160	.327	.0420 .0400	.130	.166 .158	.137 .120	.0310 .0290
553	.044 .042	.076	.094 .091	.048 .046	.070 .068	.027 .023	.145 .139	.175 .160	.170 .160	.349	.0590 .0570	.150	.188 .180	.137 .120	.0410 .0390
554	.066 .064	.108	.130 .127	.068 .066	.103 .101	.027 .023	.145 .139	.175 .160	.170 .160	.349	.0855 .0835	.150	.188 .180	.137 .120	.0635 .0615

FIGURE 1. Socket contact - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Qualification:

The (socket) contact shall be tested on a fully configured relay socket with the applicable MIL-R-6106 relay used as mating plug or pin. (See MIL-S-12883/44, MIL-S-12883/45 or MIL-S-12883/46 for applicable mating relay).

Design, construction, and physical dimensions: See figure 1 and table I.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size (ref)	Wire barrel size	Type	Class
	1st	2nd	3rd				
551	Green	Green	Brown	22	28	A	A
552	Green	Green	Red	22	22		
553	Green	Green	Orange	20	20		
554	Green	Green	Yellow	16	16		

Electrical performance:

Mating electrical contact: Relay pin (see figure 1 for pin size).

Environmental performance:

Temperature range: -70°C to +125°C.

Mechanical performance:

Vibration (sinusoidal): In accordance with MIL-STD-202 method 204, condition G, with the following exceptions:

a. The frequency range shall be varied logarithmically between the limits of 10 and 3000 Hz.

b. The procedure of MIL-STD-202 method 201 may be applied during 10-55 Hz band of the vibration frequency.

Vibration (random): In accordance with MIL-STD-810.

a. $0.4g^2/Hz$.

b. 50-2000 Hz.

Mechanical shock: Perform as specified in MIL-STD-202 method 213, condition C, except peak value shall be 200 g's.

Insertion and withdrawal force: The insertion and withdrawal forces shall be as specified in MIL-C-39029. Gauge pin diameter of dimension table of figure 1 shall be used in lieu of that specified in MS3797.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.

Probe damage: Testing will be in accordance with MIL-C-39029 with the exceptions listed in table II.

TABLE II. Probe damage.

BIN code	Test probe diameter (inches)	Bending moment (max in-lb) 1/
551, 552	.0310 .0290	.50
553	.0410 .0390	1.0
554	.0635 .0615	2.0

1/ Depth of insertion shall be full depth of bore.

Tools: Associated contact tools shall be as specified in table III.

TABLE III. Tools.

BIN code	Basic crimping tool	Positioner	Installing and removal tool
551	M22520/7-01	M22520/7-11	M81969/16-04
552	M22520/7-01	M22520/7-11	M81969/16-04
553	M22520/7-01	M22520/7-12	M81969/16-01
554	M22520/7-01	M22520/7-13	M81969/16-02

Military part numbers: See table IV.

TABLE IV. Military part numbers.

BIN code	Military part number
551	M39029/101-551
552	M39029/101-552
553	M39029/101-553
554	M39029/101-554

QPL evaluation activity: Defense Electronics Supply Center (DESC-E), Dayton, Ohio 45444-5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC, SH, MC
Air Force - 11, 15, 99
DLA - ES

User activities:
Army - AT, ME, AV
Navy - OS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3498)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.