Inch-Pound

MIL-C-39029/102A
AMENDMENT 1
21 June 1999

MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL, CONNECTOR, PIN, CRIMP REMOVABLE,
COAXIAL, SIZE 12, (FOR MIL-C-38999 SERIES I, II, III AND IV CONNECTORS)

This amendment forms a part of MIL-C-339029/102, dated 31 March 1988, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Figure 1, replace the “INNER SCOKET CONTACT (CRIMP)” detail drawing, with the following:
“

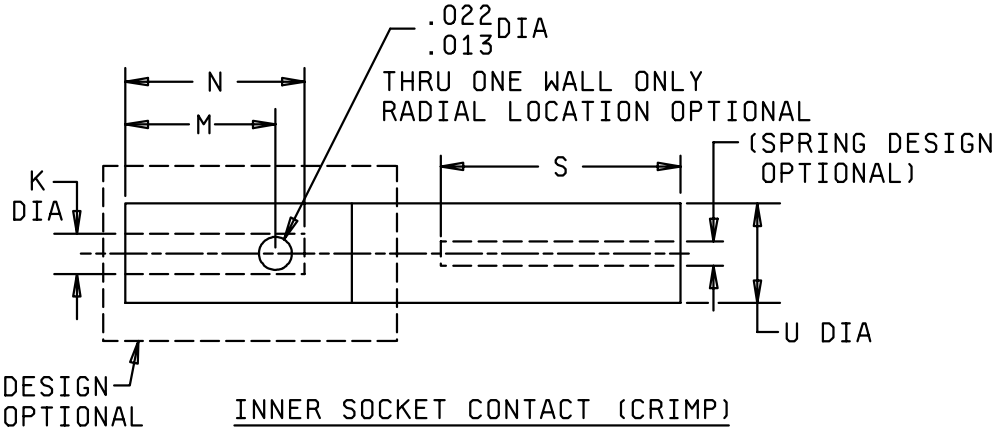

“

PAGE 2

Figure 1:

Delete the “L ref” dimension from the table.

Change the “U” dimension in the table as follows: “ From: .034/.031 To: .0350/.0310 “

Replace the N dimension with “ N: .084 min, .100 max ”.
Replace the M dimension with “ M: .063 min, .088 max ”.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.

PAGE 3

Table II, Inner Contact Column Heading, add " 1/ ".
At the end of table II, add: " 1/ The inner contact may be crimped or soldered ".

PAGE 4

Change Voltage Standing Wave Ratio (VSWR) as follows:

In subparagraph a, delete:
" (1) Pin and socket contacts fully mated.
(2) Pin and socket contacts .050 ± .005 inches from full engagement.
(3) Pin and socket contacts .100 ± .005 inches from full engagement."

Substitute:
" (1) Pin and socket contacts engaged, .755 ± .005 from retention shoulder to retention shoulder.
(2) Pin and socket contacts engaged, .783 ± .005 from retention shoulder to retention shoulder.
(3) Pin and socket contacts engaged, .810 ± .005 from retention shoulder to retention shoulder."

In subparagraph b (5), delete the words " fully mate" and substitute "mate per engagement position 1".

In subparagraph b (12), delete:
" (12) Repeat (5) through (11) with pin and socket contacts .050 ± .005 and .100 ± .005 inches from full engagement."

Substitute:
" (12) Repeat (5) through (11) with pin and socket contacts mated per engagement positions 2 & 3.

PAGE 5

Change Random Vibration as follows:

Delete subparagraph a, and substitute the following:
" a. Test condition V. Use the vibration envelope shown on figure 2 herein".

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.

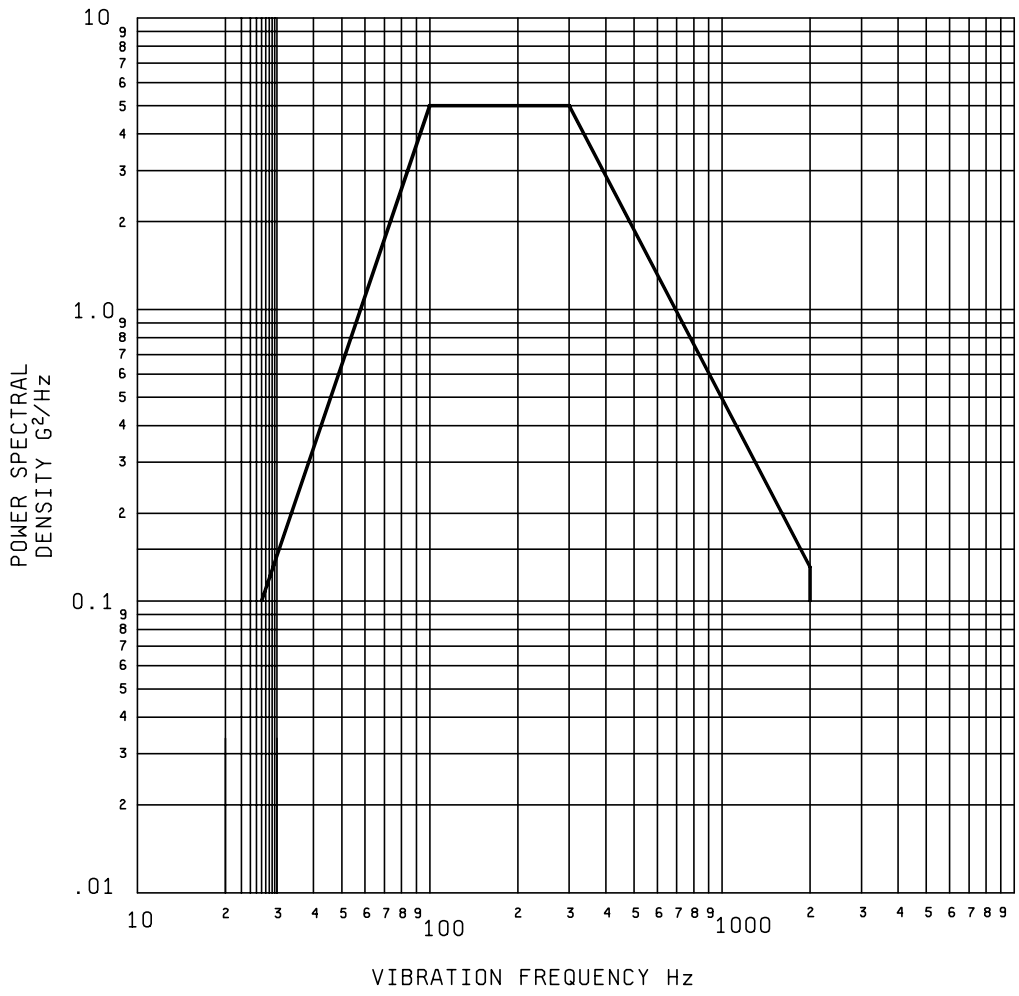

Figure 2. Vibration envelope.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity
DLA - CC

(Project 5935-4194)

Review activities:
Army - AR, AV
Navy - EC, MC, OS
Air Force - 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:46Z
Check the source to verify that this is the current version before use.