INCH-POUND

MIL-C-39029/109(AT)
30 April 1990

MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, SOCKET, MULTIPLE WIRES

This specification is approved for use by the U.S. Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

This requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39029

CONFIGURATION (see figure 1):

Notes:

1. Remove all burrs and sharp edges.
2. All diameters are to be concentric within .004 TIR.
3. Dimensional limits and surface texture apply after plating.
4. Dimensions apply before slotting.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:47Z
Check the source to verify that this is the current version before use.

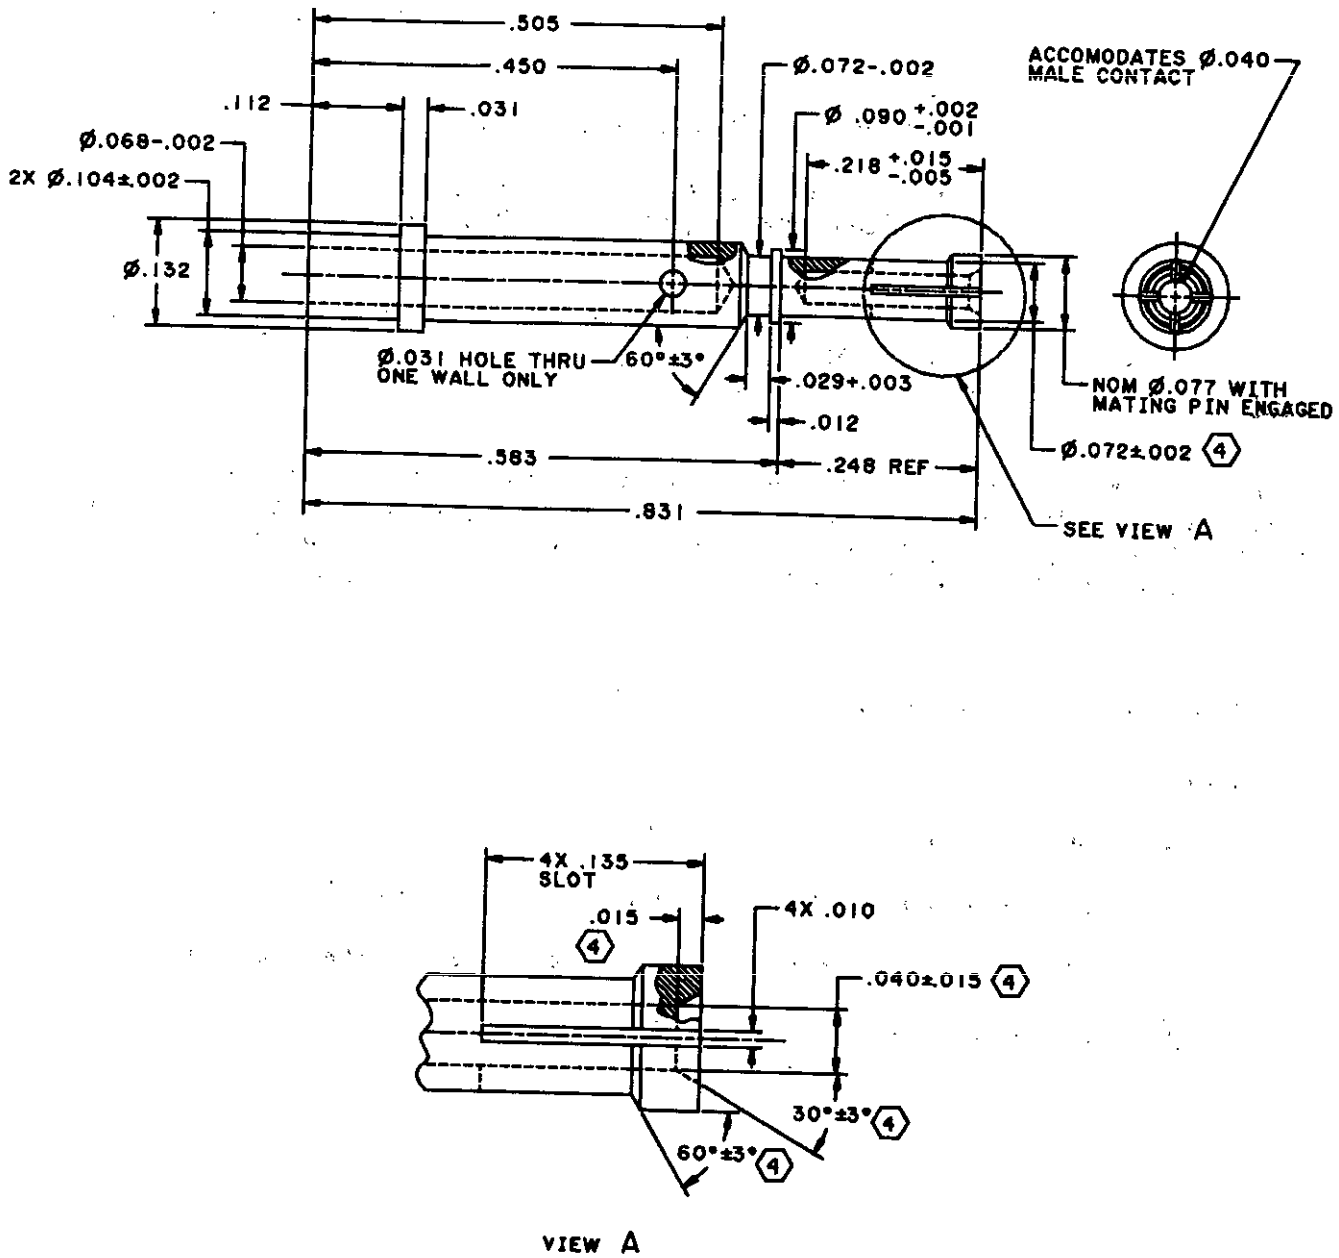


FIGURE 1. Contact, electrical connector, pin, crimp removable, socket, multiple wires.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Materials: Phosphor bronze, per QQ-B-750, Spring temper, except tensile strength: 91-99 KSI, composition A.

Optional material: Beryllium copper, per ASTM B196, ASTM B197, temper 1/4 H.

Protective finish: Plate per MIL-C-39029, type D, min .00005 gold over .00005 nickel.

Class A: Maximum operating temperature: 125°C.

Military part number: M39029/109.

Crimp with MIL-C-22520 (WEP) crimping tools as follows:

Crimping tool: part number M22520/2-01.

Positioner: part number M22520/2-08.

Turret: Daniels TH 514 head.

Mating contact: MS18135.

Usage information: M1 Tank.

Applicable military installing and removal tool: M81969/1-02.

The following requirements are not applicable:

Contact resistance
Engagement and separation force
Dielectric withstanding voltage
Insulation resistance
Wire types required for testing
Low signal level contact resistance
Vibration and shock

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project 5935-A381-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:47Z
Check the source to verify that this is the current version before use.