
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE (FOR MIL-C-28840 CONNECTORS)

This specification sheet is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

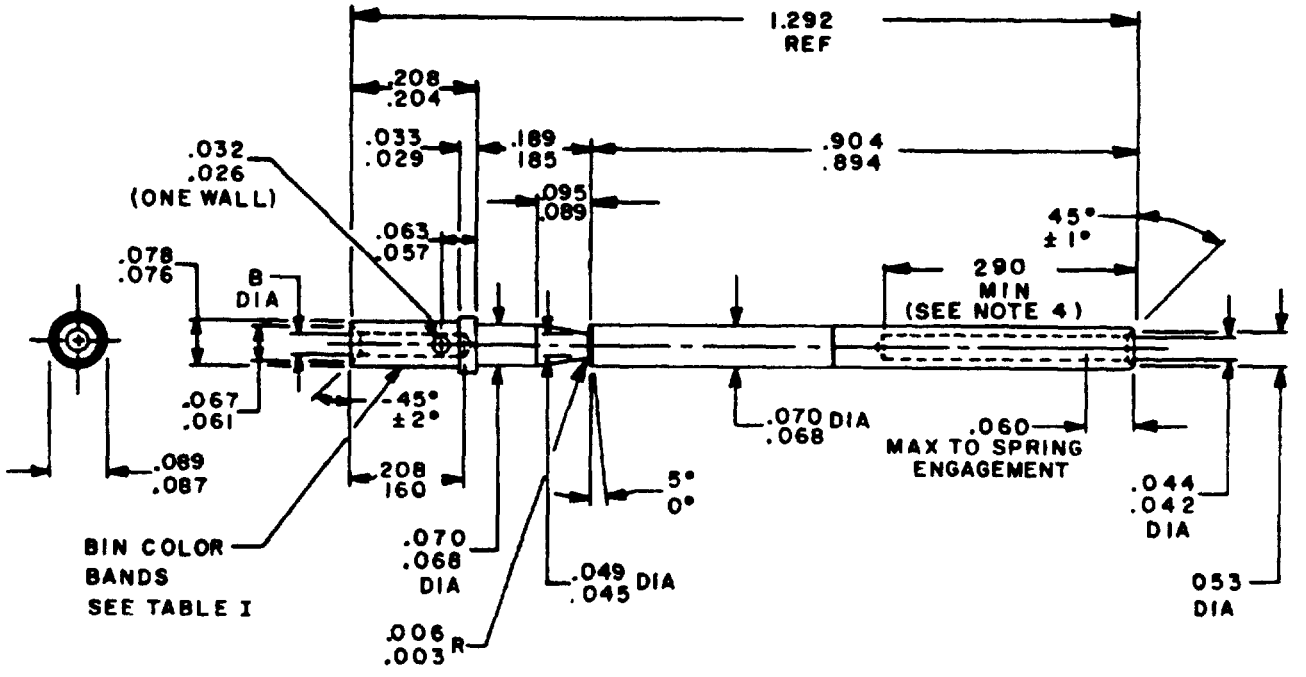

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	0.08	.045	1.14	.068	1.73	.185	4.70
.006	0.15	.049	1.24	.070	1.78	.189	4.80
.026	0.66	.053	1.35	.076	1.93	.204	5.18
.029	0.74	.057	1.45	.078	1.98	.208	5.28
.032	0.81	.060	1.52	.087	2.21	.380	9.65
.033	0.84	.061	1.55	.089	2.26	.390	9.91
.042	1.07	.063	1.60	.095	2.41	.894	22.71
.044	1.12	.067	1.70	.160	4.06	.904	22.96
						1.292	32.82

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions apply after plating
(D) 4. Contact engagement area for localized finish option

FIGURE 1. Dimensions and configuration.

(D) denotes changes

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions, design characteristics, and configuration: See figure 1 and table I.

Tools See table II.

(D) Localized finish option: Applicable. Contacts shall be finished as specified in the localized finish requirements of MIL-C-39029. The 0.290 inch minimum length requirement in the figure is the "F" length of the area "X" specified in MIL-C-39029 for contacts having separate pressure members. Nickel underplate is required.

Vibration: Method 2005 of MIL-STD-1344, test condition III. Following the test, the contacts shall be tested for endurance in accordance with MIL-STD-167/1.

High impact shock: High impact shock test shall be conducted in accordance with MIL-C-28840, using a MIL-C-28840 qualified connector that has been approved for listing on the applicable qualified products list.

Mating contact. MIL-C-39029/83.

QPL evaluating activity Naval Weapons Support Center, Crane, Indiana 47522.

(D) Porosity test (localized finish): If localized finish is used, porosity shall be tested in accordance with method 1017 of MIL-STD-1344. Immersion in nitric acid is not applicable.

TABLE I. Design characteristics.

BIN code	B dia.	Color bands			Mating end size	Wire barrel size	Type	Class	C 1/ dia.
		1st	2nd	3rd					
509	.050 .048	Green	Black	White	20	20	A	B	.032 .026
452	.0355 .0335	Yellow	Green	Red	20	22	A	B	.032 .026
453	.0200 .0180	Yellow	Green	Orange	20	28	A	B	.022 .018

1/ Hole - one wall.

TABLE II. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
509	M22520/34-01	M22520/34-02	M81969/33-01	M81969/34-01
452	M22520/34-01	M22520/34-02	M81969/33-01	M81969/34-01
453	M22520/34-01	M22520/34-02	M81969/33-01	M81969/34-01

Military part number The military part number shall be in accordance with table III.

TABLE III. Military part number.

BIN code	Military part number	Supersedes part number
509	M39029/84-509	
452	M39029/84-452	M39029/84-20-22
453	M39029/84-453	M39029/84-20-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:42Z
Check the source to verify that this is the current version before use.

Low signal level contact resistance (type A): See table IV.

Contact resistance (type A) with silver plated wire: See table V.

Tensile strength (type A) See table VI.

TABLE IV. Low signal level contact resistance (type A).

Mating end size	Wire barrel size	Wire size	Maximum contact resistance (milliohms) Initial	After conditioning
20	22	22	15	17
		26	31	38
20	28	28	50	60
		30	75	88

TABLE V. Contact resistance (type A) with silver plated wire.

Mating end size	Wire barrel size	Wire size range	Test current (amperes)	Maximum voltage drop (millivolts) 25°C ±3°C		25°C ±3°C After conditioning		200°C +3°C -0°C	
				Max	Max avg	Max	Max avg	Max	Max avg
20	22	22	5.0	73	66	88	75	125	94
		26	2.0	53	48	64	55	91	69
20	28	28	1.5	54	49	65	56	92	69
		30	1.0	60	55	73	62	103	78

TABLE VI. Tensile strength (type A).

Mating end size	Wire barrel size	Wire size	Axial load (pounds) Silver tin-plated copper wires Initial condition values	Silver tin-plated copper wires Thermal condition values	Nickel-plated copper wire Initial condition values	Nickel-plated copper wire Thermal condition values	High strength copper alloy wire
20	22	22	12	7.5	8	6.0	22
		26	5	4.0	3	2.5	10
20	28	28	3	2.25	2	1.50	5.5
		30	1.5	1.13	1.5	1.13	3.4

User activity:
Navy - OS

Agent
DLA - ES

Preparing activity
Navy - EC

(Project 5935-N264-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:42Z
Check the source to verify that this is the current version before use.