
MILITARY SPECIFICATION SHEET


CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, THERMOCOUPLE, (FOR MIL-C-5015 MS3450 SERIES AND MIL-C-83723 SERIES II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

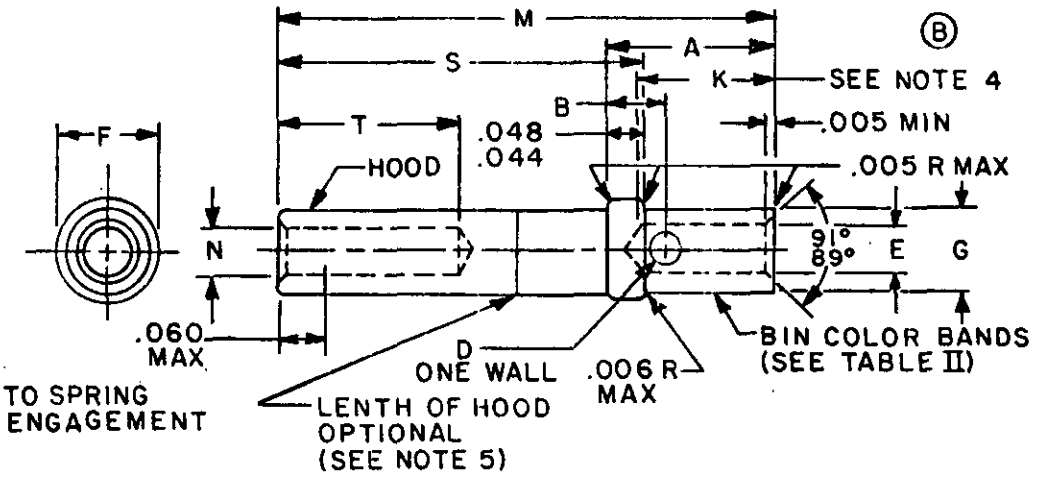

Ⓑ Size 16S - 16 Bin Codes 510 thru 513
Size 16 - 16 Bin Codes 462 thru 465

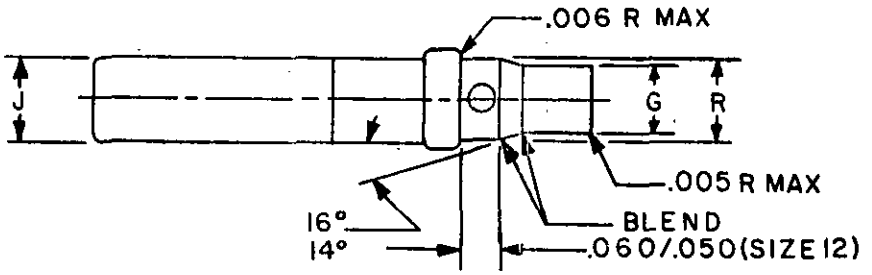

Ⓑ Size 12 - 12 Bin Codes 466 thru 469

FIGURE 1. Socket contact electrical.

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:43Z
Check the source to verify that this is the current version before use.

FSC 5935

INCHES	MM	INCHES	MM	INCHES	MM
.003	0.08	.098	2.49	.189	4.80
.005	0.13	.100	2.54	.231	5.87
.006	0.15	.101	2.57	.237	6.02
.020	0.51	.102	2.59	.250	6.35
.029	0.74	.103	2.62	.290	7.37
.033	0.84	.113	2.87	.295	7.49
.036	0.91	.130	3.30	.300	7.62
.042	1.07	.133	3.38	.399	10.13
.065	1.65	.147	3.73	.430	10.92
.066	1.68	.150	3.81	.656	16.66
.068	1.73	.155	3.94	.666	16.92
.073	1.85	.160	4.06	.846	21.74
.079	2.01	.161	4.09	.856	21.74
.097	2.46	.186	4.72	.911	23.14
				1.101	27.97

Ⓑ **DIMENSIONS**

BIN code	A	B	D DIA	E DIA	F DIA	G DIA	J DIA	K	M REF	N DIA	R	S	T
510 thru 513				.068	.133	.103	.113	.280	.911	.068		.666 .656	.560 .399
462 thru 465	.300 .290	.082 .070	.042 .036	.066	.130	.101	.106	.250	1.101	.065		.856	.560 .430
466 thru 469				.102 .098	.189 .186	.150 .147	.161 .154			.100 .097	.160 .155	.846	.710 .587

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions shown apply after plating.
Ⓑ 4. The K bore shall not break through to the T bore.
5. Maximum gap of .010 inch between hood and body of the contact.
6. Unless otherwise specified, surface finish shall be 63/.

FIGURE 1. Socket contact electrical - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:43Z
Check the source to verify that this is the current version before use.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st.	2nd.	3rd.				
510	Green	Brown	Black	16S	16	See table IV for composition	B
511	Green	Brown	Brown	16S	16		
512	Green	Brown	Red	16S	16		
513	Green	Brown	Orange	16S	16		
462	Yellow	Blue	Red	16	16		
463	Yellow	Blue	Orange	16	16		
464	Yellow	Blue	Yellow	16	16		
465	Yellow	Blue	Green	16	16		
466	Yellow	Blue	Blue	12	12		
467	Yellow	Blue	Violet	12	12		
468	Yellow	Blue	Gray	12	12		
469	Yellow	Blue	White	12	12		

(B) TABLE II. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
462 thru 465 / 510 thru 513	M22520/1-01 / M22520/7-01	M22520/1-02 Blue / M22520/7-03	M81969/14-03	M81969/14-03
466 thru 469	M22520/1-01	M22520/1-02 Yellow	M81969/14-04	M81969/14-04

(B) TABLE III. Materials, plating, and tensile strength.

BIN CODE	MATERIALS	PLATING	WIRE SIZE	AXIAL LOAD LBF-MIN	WIRE SIZE	AXIAL LOAD LBF-MIN	WIRE SIZE	LOAD LBF-MIN
510	Constantan	None	16	45	18	40	20	35
511	Alumel	None	16	130	18	110	20	50
512	Chromel	None	16	135	18	125	20	60
513	Iron	Cad. Plate	16	45	18	40	20	35
462	Constantan	None	16	42	18	40	20	35
463	Alumel	None	16	130	18	110	20	50
464	Chromel	None	16	135	18	125	20	55
465	Iron	Cad. Plate	16	50	18	45	20	40
466	Constantan	None	12	100	14	85	16	70
467	Alumel	None	12	210	14	200	16	130
468	Chromel	None	12	210	14	200	16	135
469	Iron	Cad. plate	12	100	14	85	16	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Mating contacts: MIL-C-39029/85.

Tools: See table II.

Materials and plating: See table III.

Tensile strength: See table III.

Vibration: Test condition VI, letter J of method 2005 of MIL-STD-1344, except duration shall be 8 hours in the longitudinal direction and 8 hours in the perpendicular direction (16 hours total).

Shock (specified pulse): Test condition D of method 2004 of MIL-STD-1344, except the pulse shall be approximate half sine wave of 300 g ±15 percent magnitude with a duration of 3 milliseconds ±1.

QPL evaluating activity: Defense Electronics Supply Center (DESC-E), Dayton, Ohio 45444.

International interest: NEPR 57.

Part numbers: See table IV.

TABLE IV. Part number and BIN code.

BIN code	Part number	Supersedes
510	M39029/86-510	---
511	M39029/86-511	---
512	M39029/86-512	---
513	M39029/86-513	---
462	M39029/86-462	M39029/861616C1
463	M39029/86-463	M39029/861616C2
464	M39029/86-464	M39029/861616C3
465	M39029/86-465	M39029/861616C4
466	M39029/86-466	M39029/861212C1
467	M39029/86-467	M39029/861212C2
468	M39029/86-468	M39029/861212C3
469	M39029/86-469	M39029/861212C4

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 99
DLA - ES

User activity:
Navy - OS

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3409)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:43Z
Check the source to verify that this is the current version before use.