
MILITARY SPECIFICATION SHEET


CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, THERMOCOUPLE, (FOR MIL-C-5015 MS3450 SERIES AND MIL-C-83723 SERIES II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

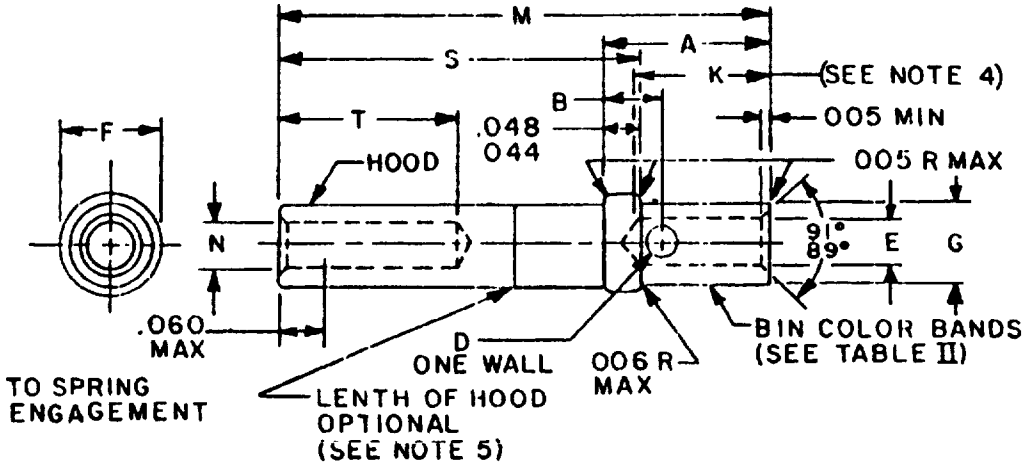

Size 16S - 16 Bin Codes 510 thru 513
Size 16 - 16 Bin Codes 462 thru 465

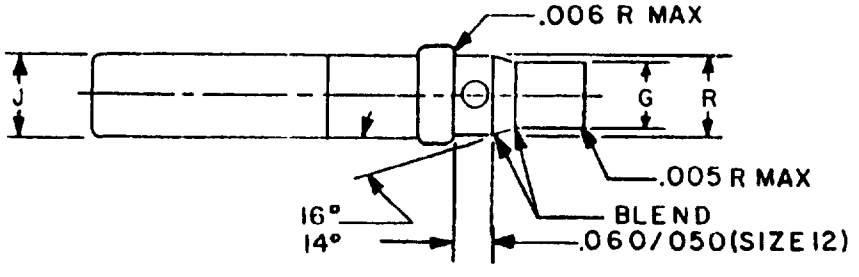

Size 12 - 12 Bin Codes 466 thru 469

FIGURE 1. Socket contact electrical.

© denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-05-21T16:48Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.098	2.49	.189	4.80
.005	0.13	.100	2.54	.231	5.87
.006	0.15	.101	2.57	.237	6.02
.020	0.51	.102	2.59	.250	6.35
.029	0.74	.103	2.62	.290	7.37
.033	0.84	.113	2.87	.295	7.49
.036	0.91	.130	3.30	.300	7.62
.042	1.07	.133	3.38	.399	10.13
.065	1.65	.147	3.73	.430	10.92
.066	1.68	.150	3.81	.656	16.66
.068	1.73	.155	3.94	.666	16.92
.073	1.85	.160	4.06	.846	21.74
.079	2.01	.161	4.09	.856	21.74
.097	2.46	.186	4.72	.911	23.14
				1.101	27.97

DIMENSIONS

BIN code	A	B	D DIA	E DIA	F DIA	G DIA	J DIA	K	M REF	N DIA	R	S	T
510 thru 513				.068	.133	.103	.113	.280	.911	.068		.666 .656	.560 .399
462 thru 465	.300 .290	.082 .070	.042 .036	.066	.130	.101	.106	.250	1.101	.065		.856	.560 .430
466 thru 469				.102 .098	.189 .186	.150 .147	.161 .154			.100 .097	.160 .155	.846	.710 .587

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions shown apply after plating.
4. The K bore shall not break through to the T bore
5. Maximum gap of .010 inch between hood and body of the contact.
6. Unless otherwise specified, surface finish shall be 63/.

FIGURE 1. Socket contact electrical - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:43Z
Check the source to verify that this is the current version before use.

TABLE I. Design characteristics

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st.	2nd.	3rd.				
510	Green	Brown	Black	16S	16	See table IV for composition	B
511	Green	Brown	Brown	16S	16		
512	Green	Brown	Red	16S	16		
513	Green	Brown	Orange	16S	16		
462	Yellow	Blue	Red	16	16		
463	Yellow	Blue	Orange	16	16		
464	Yellow	Blue	Yellow	16	16		
465	Yellow	Blue	Green	16	16		
466	Yellow	Blue	Blue	12	12		
467	Yellow	Blue	Violet	12	12		
468	Yellow	Blue	Gray	12	12		
469	Yellow	Blue	White	12	12		

TABLE II. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
462 thru 465 510 thru 513	M22520/1-01 M22520/7-01	M22520/1-02 Blue M22520/7-03	M81969/8-07 M81969/14-03	M81969/8-08 M81969/14-03
466 thru 469	M22520/1-01	M22520/1-02 Yellow	M81969/8-09 M81969/14-04	M81969/8-10 M81969/14-04

Ⓒ TABLE III. Materials, plating, and tensile strength.

BIN code	Materials	Plating	Wire size	Axial load lbf-min	Wire size	Axial load lbf-min	Wire size	Load lbf-min
510 511 512 513	Constantan Alumel Chromel Iron	None None None Cad. Plate	16	33	18	23	20	14
462 463 464 465	Constantan Alumel Chromel Iron	None None None Cad. Plate						
466 467 468 469	Constantan Alumel Chromel Iron	None None None Cad plate	12	85	14	53	16	33

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Design and construction

Dimensions and configuration See figure 1 and table I.

Mating contacts MIL-C-39029/85.

Tools See table II.

Materials and plating· See table III.

Tensile strength See table III.

Vibration Test condition VI, letter J of method 2005 of MIL-STD-1344, except duration shall be 8 hours in the longitudinal direction and 8 hours in the perpendicular direction (16 hours total).

Shock (specified pulse): Test condition D of method 2004 of MIL-STD-1344, except the pulse shall be approximate half sine wave of 300 g ±15 percent magnitude with a duration of 3 milliseconds ±1.

QPL evaluating activity Defense Electronics Supply Center (DESC-E), Dayton, Ohio 45444.

International interest NEPR 57.

Part numbers. See table IV.

TABLE IV. Part number and BIN code.

BIN code	Part number	Supersedes
510	M39029/86-510	---
511	M39029/86-511	---
512	M39029/86-512	---
513	M39029/86-513	---
462	M39029/86-462	M39029/861616C1
463	M39029/86-463	M39029/861616C2
464	M39029/86-464	M39029/861616C3
465	M39029/86-465	M39029/861616C4
466	M39029/86-466	M39029/861212C1
467	M39029/86-467	M39029/861212C2
468	M39029/86-468	M39029/861212C3
469	M39029/86-469	M39029/861212C4

Custodians.
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 17, 99
DLA - ES

User activity.
Navy - OS

Preparing activity.
Air Force - 85

Agent
DLA - ES

(Project 5935-3586-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:43Z
Check the source to verify that this is the current version before use.