
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, (FOR DOD-C-83527, CONNECTOR)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

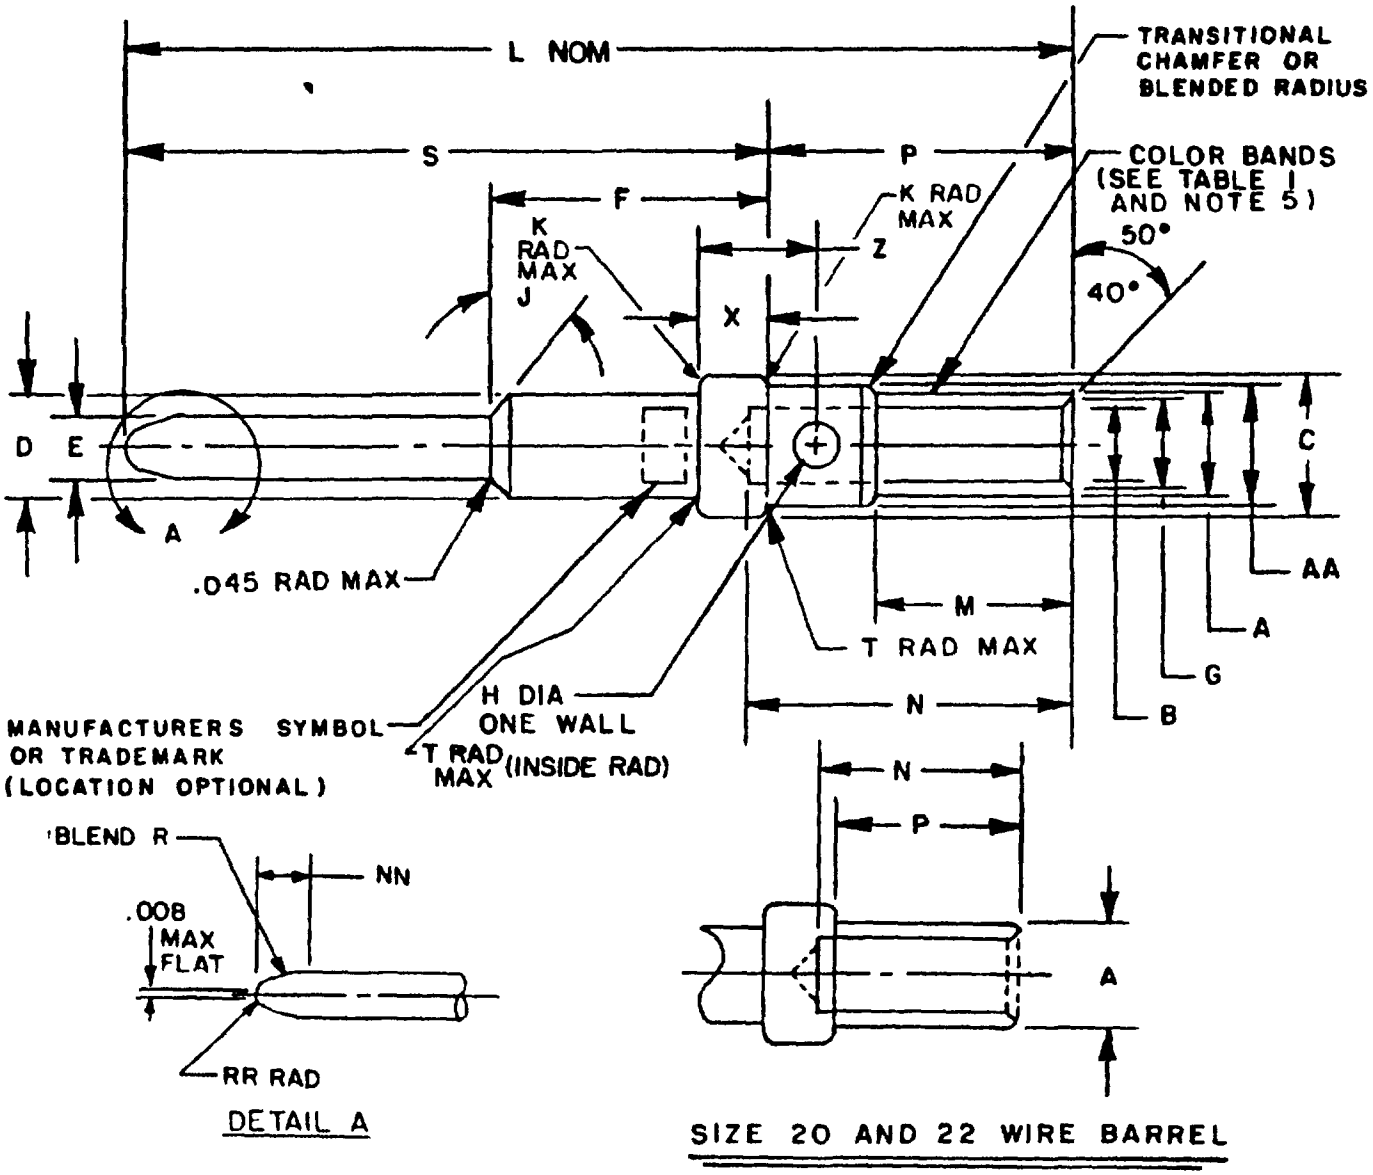

Ⓐ FIGURE 1. Pin contact.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:44Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
002	0.05	.068	1.73	.158	4.01
.003	0.07	.069	1 75	.161	4.09
004	0.10	.070	1.78	.165	4.19
.005	0.12	.072	1.83	.171	4.34
.010	0.25	.082	2.08	.177	4.50
.018	0.46	.083	2.11	.186	4.72
.020	0.51	.084	2.13	.190	4.83
.022	0.56	.090	2.29	.226	5.74
.025	0.64	.093	2.36	.231	5.87
.209	0.74	.095	2.41	.237	6.02
.031	0.79	.098	2.49	.241	6.12
.033	0.84	.100	2.54	.245	6.22
.034	0.86	.101	2.57	.250	6.35
.0340	0.864	.103	2.62	.251	6.38
.836	0.914	.107	2.72	.257	6.53
.0375	0.953	.110	2.79	.290	7 37
.039	0.99	.111	2.82	.446	11.33
041	1.04	.113	2.87	.455	11.56
.042	1.07	.127	3.23	.617	15.67
.0430	1.09	.130	3.30	.622	15.80
.044	1.12	.131	3.33	.645	16.38
.0460	1 17	.132	3 35	.665	16.89
.047	1.19	.134	3.40	.681	17.29
.048	1.22	.135	3.43	.691	17.55
.050	1.27	.137	3.48	.751	19.08
.052	1.32	.140	3 56	.761	19.33
054	1.37	.148	3.76	.770	19.56
.058	1.47	.150	3.81	.790	20.07
.0615	1.562	.151	3.84	.937	23.80
.0635	1.613				
.065	1.65				
.066	1.68				

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions shown apply after plating.
4 Spherical end dimensions shall conform to MIL-C-39029.
5 See MIL-C-39029 for options.

Ⓐ FIGURE 1. Pin contact - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:44Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Dimensions.

BIN code	A Dia	B Dia	C Dia	D Dia	E Dia	F	G Dia	H Dia	J (Deg)	K Rad	L (Nom)
597	.052	.0375	.070 (1.78)	.050	.031	.137	.047	.022	---	.003	.665 (16.89)
(22-22)	.050	.0340	.068 (1.73)	.047	.029	.127	.041	.018			.645 (16.38)
598	.068	.0460	.084 (2.13)	.072	.041	.177	.058	.033	50	.003	.790 (20.07)
(20-20)	.065	.0430	.082 (2.08)	.069	.039	.171	.052	.025	40		.770 (19.56)
539	.103	.068	.134 (3.40)	.113	.0635	.241	.090	.042	35	.005	.937 (23.80)
(16-16)	.101	.066	.130 (3.30)	.110	.0615	.226	.080	.036	25		
540	.151	.102	.190 (4.83)	.151	.095	.241	.140	.042	35	.005	.937 (23.80)
(12-12)	.148	.098	.186 (4.72)	.148	.093	.226	.130	.036	25		

BIN code	M Min	N	P (Ref)	S	T Rad	X	Z	AA Dia	NN	RR
597	N/A	.165	.237	.455	.002	.034	.161	N/A	.060	.010
(22-22)		.135	.231	.446		.029	.132		.050	.004
598	N/A	.190	.165	.622	.002	.034	.069	N/A	.070	.010
(20-20)		.150	.155	.617		.029	.054		.050	.004
539	.150	.290	.257	.691	.003	.048	.083	.111	.100	.020
(16-16)		.250	.245	.681		.044	.069	.107	.060	.010
540	.150	.290	.257	.691	.003	.048	.083	.158	---	---
(12-12)		.250	.245	.681		.044	.069	.155		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:44Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

BIN code	Color bands 1st	2nd	3rd	Mating end size	Wire barrel size	Type	Class
Ⓐ 597	Green	White	Violet	22	22	A	B
Ⓐ 598	Green	White	Grey	20	20		
539	Green	Orange	White	16	16		
540	Green	Yellow	Black	12	12		

TABLE III. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
Ⓐ 597	M22520/2-01	M22520/2-23	M81969/1-01	M81969/1-01
Ⓐ 598	M22520/2-01 M22520/7-01	M22520/2-08 M22520/7-02	M81969/1-02	M81969/1-02
539	M22520/1-01 M22520/7-01	M22520/1-02 Blue ~~M22520/7-03~~	M81969/1-03	M81969/1-03
540	M22520/1-01	M22520/1-11	---	M81969/28-02

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and tables I and II.

Tools: See table III.

Vibration: Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Ⓐ Mating contact: MIL-C-39029/94A.

Low signal level contact resistance: The mating depth shall be 0.153 inch.

Contact strength: The bending moment of M39029/93-537 shall be 0.23 lb-in.

QPL evaluating activity: Defense Electronics Supply Center (DESC-E), Dayton, OH 45444.

International interest: NEPR 57.

Ⓐ Part number example: M39029/93-597.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:44Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 99
DLA - ES

User activity:
Navy - OS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3648-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:44Z
Check the source to verify that this is the current version before use.