MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR SOCKET, CRIMP REMOVABLE, COAXIAL, SIZE 1 (FOR DOD-C-83527 CONNECTORS)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

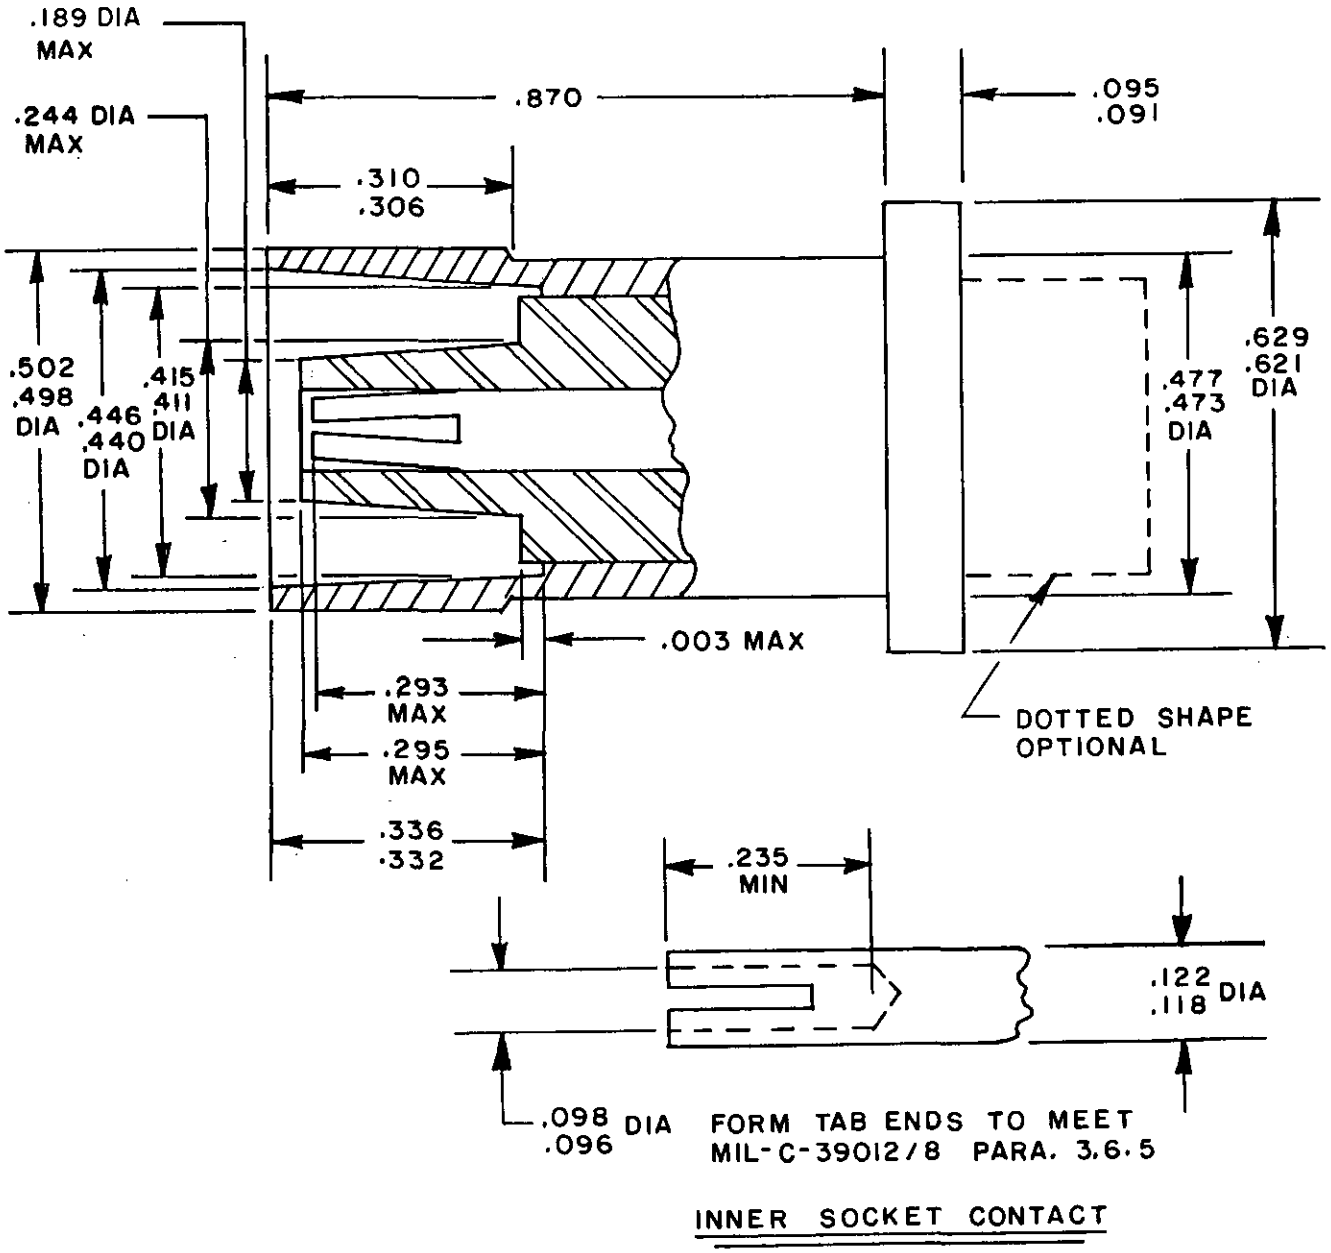


FIGURE 1. Socket contacts.

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-02-21T18:45Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.003	0.08	.336	8.53
.091	2.31	.389	9.88
.095	2.41	.411	10.44
.098	2.49	.415	10.54
.118	3.00	.440	11.18
.122	3.10	.446	11.33
.235	5.97	.473	12.01
.244	6.20	.477	12.12
.293	7.44	.498	12.65
.295	7.49	.502	12.75
.306	7.77	.621	15.77
.310	7.87	.629	15.98
.332	8.43	.870	22.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Socket contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Mating contact: MIL-C-39029/97.

Materials:

Body: Brass, half-hard or copper-beryllium.

Insulator: MIL-P-19668.

Crimp ferrule: Copper, annealed.

Gasket: Silicone rubber.

Plating: Gold as required for MIL-C-39029, type D contacts.

Performance:

Temperature range: -60°C to +150°C.

Impedance: 50 ohms nominal.

VSWR: 1.70:1 maximum.

Frequency range: 0 to 5 GHz.

Insertion loss: 0.3 dB.

Contact resistance:

Outer contact: 0.2 milliohm maximum.

Inner contact: 1.0 milliohm maximum.

Rated voltage: 1000 V rms at sea level.

Dielectric withstanding voltage: 2500 V rms at sea level.

Insulation resistance: 5000 megohms minimum.

Cable retention: 200 pounds minimum.

Shock: Test condition D per method 2004 of MIL-STD-1344.

Vibration: Test condition VI, letter J, per method 2005 of MIL-STD 1344. Directions shall be longitudinal and perpendicular. Time duration shall be 8 hours in each direction.

Tools: Tools shall be as specified in table II.

Shipping: Figure 1 illustrates final assembly; parts are to be shipped unassembled in a suitable container. Manufacturers recommended assembly instructions shall be shipped with each unit package.

QPL evaluating activity: Defense Electronics Supply Center (DESC-E), Dayton, OH 45444.

Part number: M39029/98-548.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:45Z
Check the source to verify that this is the current version before use.

TABLE I. Design characteristics.

BIN code	Color bands		
	1st	2nd	3rd
548	Green	Yellow	Grey

TABLE II. Tools.

Cable size	Removal tool	Inner contact		Outer contact	
		Basic crimp tool	Positioner	Basic crimp tool	Die
RG-214	M81969/XX	M22520/XX	M22520/XX	M22520/XX	M22520/XX

Custodian:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, SH, MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - OS

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3415-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:45Z
Check the source to verify that this is the current version before use.