
MILITARY SPECIFICATION SHEET

Ⓐ

CONTACTS, ELECTRICAL CONNECTOR PIN, CRIMP REMOVABLE, COAXIAL, SIZE 5 (FOR DOD-C-83527 CONNECTORS)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

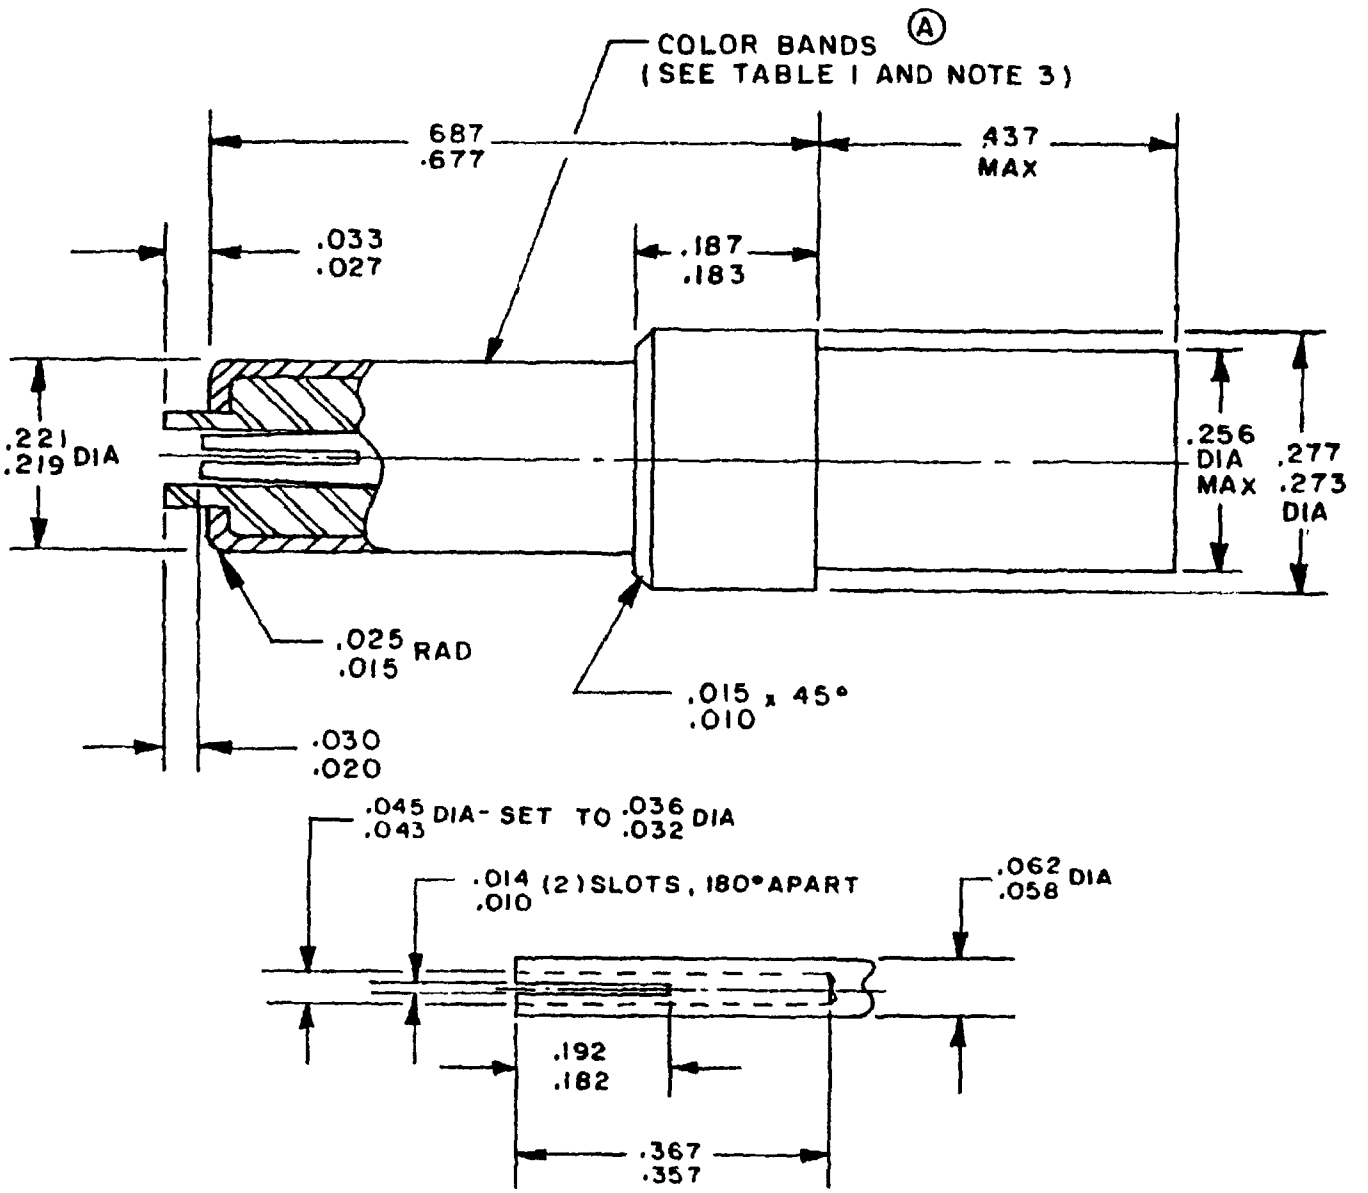

INNER SOCKET CONTACT

FIGURE 1. Pin contacts.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:45Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.010	0.25	.182	4.62
.014	0.36	.183	4.65
.015	0.38	.187	4.75
.020	0.51	.192	4.88
.025	0.64	.219	5.56
.027	0.69	.221	5.61
.030	0.76	.256	6.50
.032	0.81	.273	6.93
.033	0.84	.277	7.04
.036	0.91	.357	9.07
.043	1.09	.367	9.32
.045	1.14	.437	11.10
.058	1.47	.677	17.20
.062	1.57	.687	17.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See MIL-C-39029 for option.

FIGURE 1. Pin contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

(A) Mating contact: MIL-C-39029/100A.

Materials:

Body: Brass, half-hard or copper-beryllium.

(A) Insulator: MIL-P-19468.

Crimp ferrule: Copper, annealed.

Gasket: Silicone rubber.

Plating: Gold as required for MIL-C-39029, type D contacts.

Performance:

(A) Temperature range -65°C to +165°C.

Impedance. 50 ohms nominal.

VSWR: 1.30:1 maximum.

Frequency range. 0 to 500 MHz.

Insertion loss· 0.3 dB.

Contact resistance:

(A) Outer contact: 1.5 milliohms maximum.

(A) Inner contact: 10.0 milliohms maximum.

Rated voltage: 325 V rms at sea level.

Dielectric withstanding voltage: 750 V rms at sea level.

Insulation resistance: 5,000 megohms minimum.

Cable retention: 60 pounds minimum.

Shock: Test condition D per method 2004 of MIL-STD-1344.

Vibration: Test condition VI, letter J, per method 2005 of MIL-STD-1344. Directions shall be longitudinal and perpendicular. Time duration shall be 8 hours in each direction.

(A) Installation and removal: Installation and removal of contact shall be per manufacturer recommended instructions.

Shipping: Figure 1 illustrates final assembly; parts are to be shipped unassembled in a suitable container. Manufacturer recommended assembly instructions shall be shipped with each unit package.

QPL evaluating activity: Defense Electronics Supply Center (DESC-E), Dayton, OH 45444.

Part number· M39029/99-549.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:45Z
Check the source to verify that this is the current version before use.

TABLE I. Design characteristics.

BIN code	Color bands			Contact cavity size	Cable accom.	Type	Class
	1st	2nd	3rd				
Ⓐ 549	Green	Yellow	White	5	M17/28-RG-58	A	B

Ⓐ TABLE II. Tools.

Cable size	Removal tool	Inner contact		Outer contact	
		Basic crimp tool	Positioner	Basic crimp tool	Die
RG- 58	M81969/28-01	M22520/2-01	K-345 Setting no. 5 Daniels Manufac-turing or approved equivalent	M22520/5-01	M22520/5-45B

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT
Navy - OS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3648-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:45Z
Check the source to verify that this is the current version before use.