The documentation and process conversion measures necessary to comply with this amendment shall be completed by 14 October 2000.

INCH-POUND

MIL-PRF-19500/455C
AMENDMENT 2
14 July 2000
SUPERSEDING
AMENDMENT 1
18 August 1999

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER SWITCHING
TYPES 2N5664, 2N5665, 2N5666, 2N5666S, 2N5667, AND 2N5667S
JAN, JANTX, JANTXV, AND JANS

This amendment forms a part of MIL-PRF-19500/455C, dated 25 January 1998 and is approved for use by all Departments and Agencies of the Department of Defense.

* The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement pages	Page replaced
5	5
6	6

PAGE 1

* Title; delete and substitute: "SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER SWITCHING, TYPES 2N5664, 2N5665, 2N5666, 2N5666S, 2N5667, AND 2N5667S, JAN, JANTX, JANTXV, JANS, JANHC, AND JANKC".

* 1.1, end of paragraph; add "Two levels of product assurance are provided for each unencapsulated device type as specified in MIL-PRF-19500."

1.3, maximum ratings information, second P_T column, delete "T_A = +100°C" and substitute "T_C = +100°C".

PAGE 6

* 3.4 second line; delete "figures 1 and 2 herein." and substitute "figures 1, 2, and 3 herein."

PAGE 7

* Add the following paragraph:

"4.3.2 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with MIL-PRF-19500. As a minimum, die shall be 100 percent probed to insure the assembled chips will meet the requirements of group A, subgroup 2."

DISTRIBUTION STATEMENT. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:09Z
Check the source to verify that this is the current version before use.

* Add the following new paragraph:

"6.5 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example JANHCA2N5664) will be identified on the QPL.

Die ordering information (1)	
PIN	Manufacturer
	43611
2N5664	JANHCA2N5664
2N5665	JANHCA2N5665
2N5666	JANHCA2N5666
2N5667	JANHCA2N5667

(1) For JANKC level, replace JANHC with JANKC."

The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA -CC

Review activities:
Army - AR, MI
Navy - AS, CG, MC
Air Force - 13, 19, 99

Preparing activity:
DLA - CC

(Project 5961-2299)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:09Z
Check the source to verify that this is the current version before use.

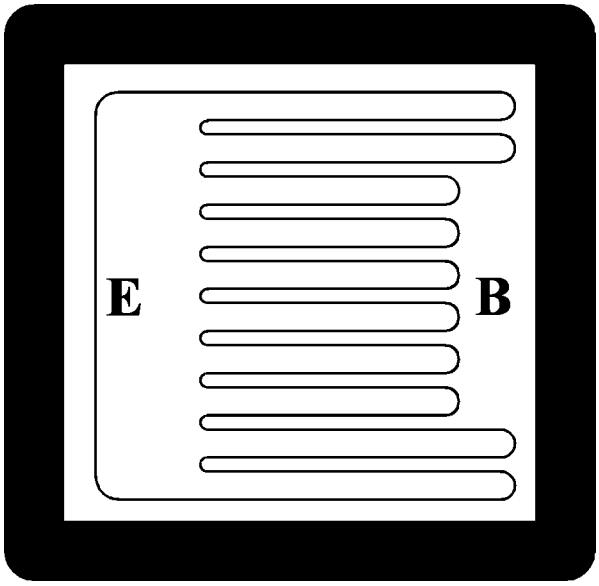

1.	Chip size	120 x 120 mils ± 2 mils
2.	Chip thickness	10 ± 1.5 mils nominal
3.	Top metal	Aluminum 30,000Å minimum, 33,000Å nominal
4.	Back metal	A. Al/Ti/Ni/Ag12kÅ/3kÅ/7kÅ/7kÅmin.15kÅ/5kÅ/10kÅ/10kÅ nom. B. Gold 2,500Å minimum, 3,000Å nominal
5.	Backside	Collector
6.	Bonding pad	B = 52 x 12 mils, E = 84 x 12 mils.

FIGURE 3. JANHC and JANKC A-version die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:09Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.3).

3.2 Associated specification. The individual item performance requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and herein.

3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1, 2 and 3 herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4 and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in Table I, subgroup 2 herein.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 JANHC and JANKC. Qualification inspection for JANHC and JANKC shall be in accordance with MIL-PRF-19500

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:09Z
Check the source to verify that this is the current version before use.