NOT MEASUREMENT SENSITIVE

MIL-DTL-32145
30 June 2004

DETAIL SPECIFICATION

NECK SEAL, FLYERS', ANTI-EXPOSURE, RUGGEDIZED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for two types of flyers' ruggedized anti-exposure neck seals.

1.2 Classification. The neck seal is furnished in one size for each type as specified (see 6.2):

Type I – Men's
Type II – Women's

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Comments, suggestions, or questions on this document should be addressed to: Commander, Naval Air Warfare Center Aircraft Division (Code 414100B120-3), Highway 547, Lakehurst, NJ 08733-5100 or emailed to Tom.Omara@navy.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

AMSC N/A FSC 8475

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTION

A-A-50195	-	Thread, Aramid

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-32149	-	Cloth, Waterproof, Flame Resistance, Moisture Vapor Permeable

(Copies of these documents are available online at assist.daps.dla.mil/quicksearch or www.dodssp.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government drawings. The following Government drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

NAVAL AIR SYSTEMS COMMAND (NAVAIR)

3769AS110	-	Neck Seals, Flyers' Ruggedized Anti-Exposure
3769AS111	-	Neck Seals, Gasket, Anti-Exposure

(Copies of these drawings are available online at http://ct.dscp.dla.mil/contracting/, or from Defense Supply Center Philadelphia, Code CBTC Bldg. 6, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ-Z1.4	-	Procedures, Sampling, and Tables for Inspection by Attributes. (DoD adopted)

(Copies of this document are available from www.asq.org or the American Society for Quality, 600 Plankinton Avenue, Milwaukee, WI 53203.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM) INTERNATIONAL

ASTM-D297	-	Rubber Products – Chemical Analysis, Standard Test Methods for. (DoD adopted)
ASTM-D395	-	Rubber Property – Compression Set, Standard Test Methods for. (DoD adopted)
ASTM-D412	-	Vulcanized Rubber and Thermoplastic Elastomers – Tension, Standard Test Methods for. (DoD adopted)
ASTM-D573	-	Rubber – Deterioration in an Air Oven, Standard Test Method for. (DoD adopted)
ASTM-D624	-	Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers, Standard Test Method for. (DoD adopted)
ASTM-D6193	-	Stitches and Seams, Standard Practice for. (DoD adopted)

(Copies of these documents are available from www.astm.org or ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2 (see 6.3).

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Materials and components. Unless otherwise specified in the contract or purchase order (see 6.2), the material and components specified in 3.3.1 and 3.3.2 shall not have been manufactured more than 18 months prior to the date of delivery of the neck seal(s).

3.3.1 Laminated cloth attachment panel. The base cloth for the laminated cloth attachment panel shall be in accordance with MIL-DTL- 32149.

3.3.2 Latex seal. The latex for the neck seal (see 6.5) shall be natural polyisoprene rubber, 30/1000 inch thick, conforming to table I when tested as specified in 4.4.1. The color shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

TABLE I. Latex rubber

CHARACTERISTIC	REQUIREMENT
Specific gravity	.93 ± .05
Puncture propogation (lbs, min)	250
Tensile strength (psi, min)	3500
Ultimate elongation (%, min)	760
100% Modulus (psi)	120 ± 20
300% Modulus (psi)	240 ± 50
Heat aging	
Elongation change (%)	25
Tensile strength change (%)	25
Compression set (%, max)	50

3.3.3 Thread. The thread for stitching the neck seals shall be green aramid thread conforming to A-A-50195. The color shall match the material specified in 3.3.1.

3.4 Design. The neck seal shall be a stretchable latex gasket with a tape sealed seamed attachment panel.

3.5 Patterns. The Government furnished patterns (see 6.4) which show directional lines, and notches for assembly and seam allowances, shall not be altered in any way. The furnished Government patterns shall be used as a guide for cutting the working patterns. Minor modifications of the working patterns are permitted when using automated equipment or to meet a manufacturer's process, but the alterations shall not affect the serviceability, dimensions, or appearance of the neck seal.

3.5.1 List of pattern parts. The pattern parts and cutting quantities for the neck seal shall be as specified in table II.

TABLE II. Pattern parts

MATERIAL	PATTERN NOMENCLATURE	COMPUTER NOMENCLATURE	CUT PARTS
Laminated cloth	Neck Attachment Panel	NECKATHPNL	1

3.6 Construction. The neck seal shall be constructed in accordance with drawings 3769AS110 and 3769AS111.

3.7 Marking. Cut parts shall be marked, ticketed, or bundled to ensure a uniform size throughout the seal. Any method of marking shall be used except metal fastening devices, sewn

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

on tickets, or adhesive type tickets that leave traces of adhesive on the material after removal of the ticket.

3.8 Stitches, seams, and stitching. ASTM-D6193, Stitch Type 301, with 6 to 8 stitches per inch shall be used in the construction of the laminated cloth attachment panel. Seams shall be as specified in construction drawings (see 3.6).

3.9 Heat sealing. All sewn seams and stitching shall be covered on the inside of the neck seal and sealed with the seam tape. The entire width of the seam tape shall be heat sealed over the seams and stitching. Crossover areas and ends left unsealed after heat sealing shall be taped. To maintain a tape overlap, sealed sewn seams shall not contain more than two layers of seam tape per seam. The tape shall not lift from the seam at any point. End joints where the tape passes over taped seams on the neck seal shall be avoided. The overlap of splicings and tape ends shall be not less than ¾ inch.

3.10 Finished dimensions. The finished neck seal dimensions shall be as specified in table III. A tolerance of ± $^{3}/_{16}$ inch shall be used for all table III dimensions. The neck seal shall be measured flat. Locations A, B, C, D and E are shown on figure 1.

TABLE III. Finished dimensions


LOCATION	LOCATION NAME	MEASUREMENT (INCHES)
A	Attachment Panel Center Front Length	1 $^{3}/_{4}$
B	Attachment Panel Center Back Length	1 $^{3}/_{4}$
C	Attachment Panel Shoulder Length	2 $^{1}/_{8}$
D	Attachment Panel Width across shoulder	15 $^{1}/_{2}$
E	Neck Opening (inside at shoulder)	11

3.11 Markings.

3.11.1 Identification. Each neck seal shall contain identification markings conforming to drawing 3769AS110.

3.12 Workmanship. The finished neck seal shall be uniform in quality and free from loose thread, foreign matter, and irregular defects that can adversely affect usage or durability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

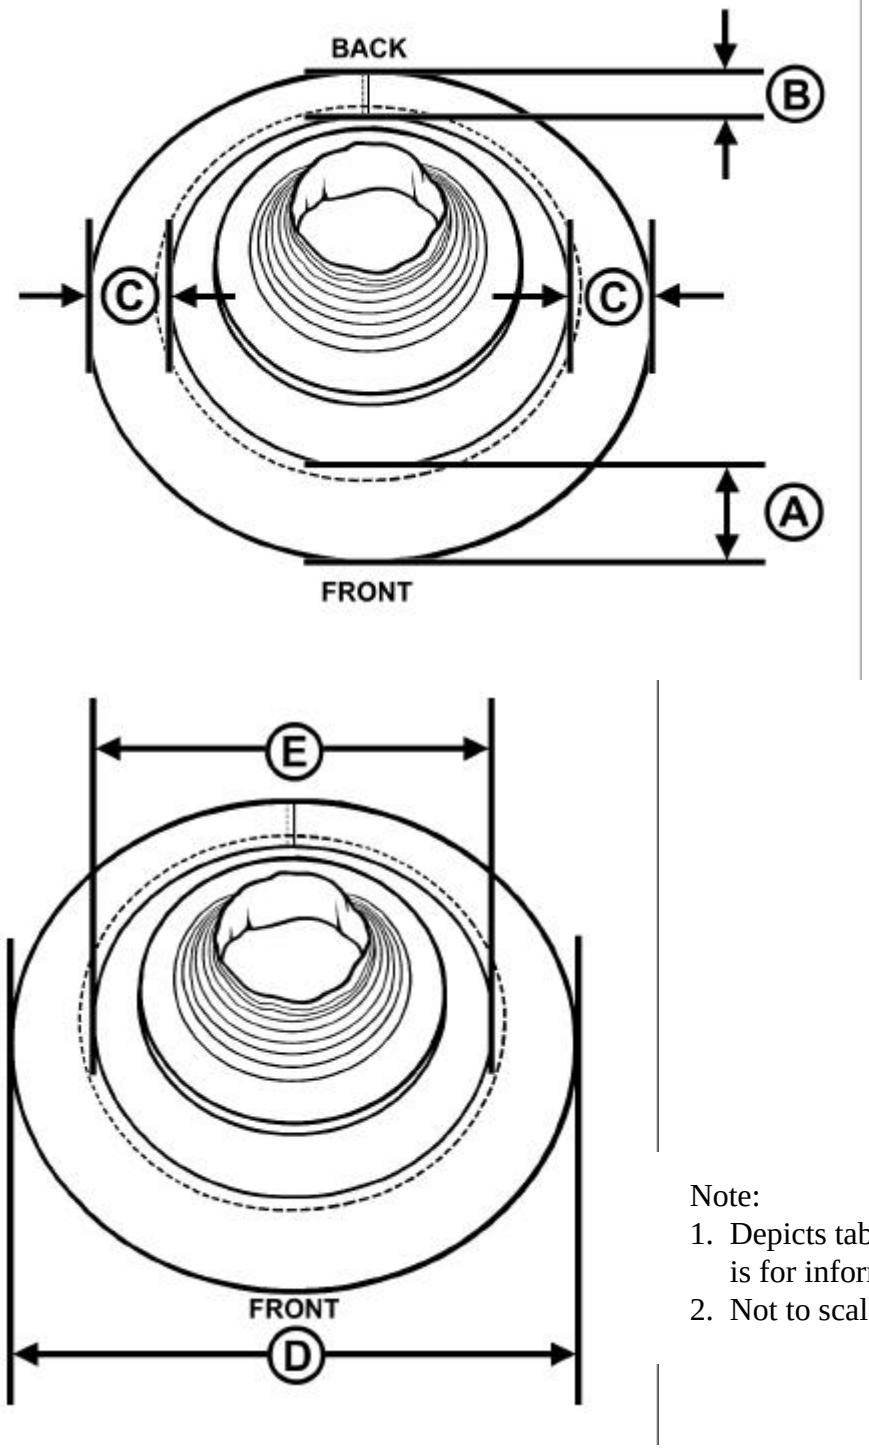

Note:
1. Depicts table III locations, and is for informational purposes only.
2. Not to scale.

FIGURE 1. Neck seal dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3)

4.2 First article inspection. First article inspection shall consist of the examinations and tests specified in 4.4.1, 4.4.2, 4.4.3, and 4.4.4.

4.2.1 First article samples. Unless otherwise specified in the contract or purchase order (see 6.2), the number of samples for first article inspections shall be one neck seal for each type ordered. The sample unit shall be one neck seal and the lot size shall be expressed in units of neck seals.

4.3 Conformance inspection. Conformance testing shall consist of the examinations specified in 4.4.1, 4.4.2, 4.4.3, and 4.4.4.

4.3.1 Conformance inspection samples. Sampling for inspection shall be performed in accordance with ASQ-Z1.4. The sample unit shall be one neck seal and the lot size shall be expressed in units of neck seals.

4.4 Examinations and tests.

4.4.1 Material and component examinations and tests. Materials and components shall be examined and tested in accordance with the specified examinations and tests in table IV.

TABLE IV. Materials and components examinations and tests

MATERIAL	CHARACTERISTIC	REQUIREMENT PARAGRAPH	EXAMINATIONS AND TESTS
Laminated cloth	Material identification	3.3.1	All examinations and tests specified in MIL-DTL-32149
Latex	Specific gravity	3.3.2	ASTM-D297, hydrostatic method
	Puncture propagation	3.3.2	ASTM-D624, Die C, 20 in/min
	Tensile strength	3.3.2	ASTM-D412, Method A, Die D, 20 in/min
	Ultimate elongation	3.3.2	ASTM-D412, Method A, Die D, 20 in/min
	100% modulus	3.3.2	ASTM-D412, Method A, Die D, 20 in/min

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

TABLE IV. Materials and components examinations and tests – Continued.

MATERIAL	CHARACTERISTIC	REQUIREMENT PARAGRAPH	EXAMINATIONS AND TESTS
Latex Continued	300% modulus	3.3.2	ASTM-D412, Method A, Die D, 20 in/min
	Heat aging	3.3.2	ASTM-D573, 70 hrs, 158 °F
	Elongation change	3.3.2	ASTM-D412, Method A, Die D, 20 in/min
	Tensile strength change	3.3.2	ASTM-D412, Method A, Die D, 20 in/min
	Compression set	3.3.2	ASTM-D395, Method B, 22 hrs, 158 °F, 25 % deflection
Thread	Material identification	3.3.3	All examinations and tests specified in A-A-50195

4.4.2 Classification of end item defects. The end items shall be visually examined and measured for the defects specified in table V.

TABLE V. Classification of end item defects.

EXAMINE	DEFECT	CLASSIFICATION		
		CRITICAL	MAJOR	MINOR
General	Any hole, scissor or knife cut, tear, mend, burn, or weakening defect such as multiple floats, slubs, skips, needle chew or abraded area.		101	
	Any evidence of fabric delamination.		102	
	Any spot or stain (compound, oil, dirt, including marks) clearly visible.			201
	Color of any component not as specified.			202
	Any thread not trimmed to $^{1}/_{16}$ inch and not covered by heat sealed seam tape.		103	
	Any thread not trimmed to $^{1}/_{16}$ inch or thread scraps not removed.			203
	Any damaged tape edges greater than 1/16 inch from outside edge.			204
	Material and components more than 18 months old.	1		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of end item defects – Continued.

EXAMINE	DEFECT	CLASSIFICATION		
		CRITICAL	MAJOR	MINOR
Components and assembly	Any defective component or defect that will affect the form, fit, or function of the assembly.		104	
	Any component part or operation omitted, not as specified, or required operation improperly performed.		105	
	Any component part not cut in accordance with the patterns.		106	
Heat sealing	Any seam tape not located as specified.		107	
	Any stitching not covered by seam tape.		108	
	Any spliced tape not overlapped $^{3}/_{4}$ inch.		109	
Seams and stitching	Any seam or attachment of any component twisted, puckered, pleated or caught in any unrelated operation or stitching that is not properly forced out or contained in a fold more than $^{1}/_{8}$ inch.		110	
	End of stitching not securely backstitched for at least $^{1}/_{2}$ inch when not caught in other seams or stitching.		111	
	Thread breaks, skips and run-offs not securely overstitched for at least $^{1}/_{2}$ inch.		112	
	Any stitching irregular or unevenly gauged (greater than 50% of the seam length or 4 inches, whichever is less).		113	
	Not specified seam or stitch type.		114	
	Loose tension resulting in a loose seam or tight tension resulting in breaking of stitches when normal pull is applied.			205
	Stitches per inch - one or two stitches more or less than specified (to be scored only when condition exists on 25% of the seam or more).		115	
	Stitches per inch - more than two stitches more or less than specified (to be scored only when condition exists on 25% of the seam or more).		116	
	Any open seam.		117	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of end item defects – Continued.

EXAMINE	DEFECT	CLASSIFICATION		
		CRITICAL	MAJOR	MINOR
Identification marking	Identification missing, incorrect, or illegible.		118	
	Misplaced by more than 1 inch.			206
End item measurements	Any dimension not within the specified tolerance.		119	

4.4.3 End item dimensional examination. The end item shall be measured for conformance to the dimensions specified in 3.10 and table III as follows:

Dimension A - Measure cloth at center front from edge to edge.

Dimension B - Measure cloth at center back from edge to edge.

Dimension C - Measure cloth at side from edge to edge.

Dimension D - Measure across neck seal from folded edge to folded edge.

Dimension E - Measure across neck joining seam fro folded edge to folded edge.

4.4.4 Visual examination. The end item shall be visually examined for compliance to 3.4, 3.6, 3.8, 3.9, 3.11, and 3.12.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The neck seal is military unique due to the neck seal's use with the continuous wear coverall worn during overwater flights to protect the aircrewmember from hypothermia in the event of immersion in cold water. The neck seal types are intended to be fitted on an individual basis and altered by maintenance personnel for use with all sizes of continuous wear coveralls.

6.2 Acquisition documents. Acquisition documents should specify the following:

a. Title, number, and date of this specification, including any amendments.
b. Type and quantity desired (see 1.2).
c. National stock number.
d. Applicable Government patterns and drawings, including revisions.
e. When first article is required (see 3.1).
f. First article samples (see 4.2.1).
g. Name and address of the first article inspection facility; and the name and address of the Government activity responsible for conducting the first article inspection program.
h. Packaging requirements (see 5.1).

6.3 First article. When first article inspection (see 3.1) is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory, and the number of items to be tested. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Patterns. For access to patterns, contact the procuring activity issuing the invitation for bid.

6.5 Latex seal. A latex seal conforming to 3.3.2 is available from Formco, 5250 Mayfair Road, North Canton, OH 44720, part number FNS-20 for type I and FNS-13 for type II.

6.6 Shelf-life. This specification covers items where shelf-life is a consideration. Specific shelf-life requirements should be specified in the contract or purchase order. The shelf-life codes are contained in the Federal Logistics Information System Total Item Record. Additive information for shelf-life management may be obtained from DoD 4140.27-M Shelf-life Management Manual, or the designated shelf-life Points of Contact (POC). The POC should be contacted in the following order: (1) the Inventory Control Points (ICPs), and (2) the DoD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.

Service and Agency administrators for the DoD Shelf-Life Program. Appropriate POCs for the DoD Shelf-Life Program can be contacted through the DoD Shelf-Life Management website: http://www.shelflife.hq.dla.mil/.

6.7 Subject term (key word) listing.

Anti-exposure coveralls
Latex
PTFE laminate material
Sealing machine, heat
Shelf-life

Custodians:
Army-AV
Navy-AS
DLA-CT

Preparing activity:
Navy - AS

(Project 8475-0017)

Review activity:
Navy-NU

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:59Z
Check the source to verify that this is the current version before use.