NON MEASUREMENT SENSITIVE
MIL-D-3943/127
20 June 1989

MILITARY SPECIFICATION SHEET

DECORATION, DISTINGUISHED CAREER SERVICE, DLA

This specification is approved for use by all Departments and Agencies of the Department of Defense. The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

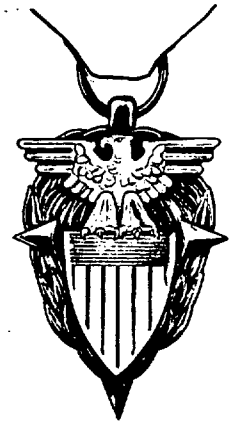

Obverse



Reverse

MATERIAL:
BASE: Red Brass
DEVICE: Red Brass

DIMENSIONS INCHES (METRIC):
HEIGHT (Overall):
BASE (Including Lug): 1-3/4 (4.5cm) (REF)
DEVICE: 1-1/4 (3.18cm) (REF)
THICKNESS:
BASE (At Thickest Point, Horizontal Arrows): .125 (.31cm) ± .005 (.012cm)
DEVICE (At Eagle's Breast): .100 (.25cm) ± .005 (.012cm)
ASSEMBLED (At Eagle's Breast): .190 (.48cm) ± .010 (.025cm)

FINISH:
BASE: OXIDIZED, LIGHTLY RELIEVED, MATTE FINISH
DEVICE: OXIDIZED, LIGHTLY RELIEVED, MATTE FINISH

NOTES:
1: The device shall be soldered to the base.
2: The reverse shall be suitable for engraving.
3: Type I decoration set shall consist of a regular size medal, service ribbon and lapel button all packaged in a presentation case conforming to MIL-C-14633, Style 6, Type VIII with a Class 1 or 1A pad.
4: The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/336.
5: The lapel button shall conform to MIL-L-11484/29.

Custodian
Army - IH

Preparing Activity
Army - IH

Review Activities:
Other - CT

(Project No. 8455-0402)

User Activities:
Other - DLA

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:57Z
Check the source to verify that this is the current version before use.