INCH-POUND

MIL-S-22760C(MC)

28 MARCH 1991

SUPERSEDING
MIL-S-22760B(MC)
18 October 1979

MILITARY SPECIFICATION

SUPPORT, CROWN, SERVICE CAP; AND SUPPORT HOLDER

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a crown support and a support holder.

1.2 Classification. The crown support shall be of one type and in the following sizes, as specified (see 6.2). When specified (see 6.2), support holders shall be furnished with the crown supports.

Schedule of Sizes

Small - 32 1/4 inches for sizes 6 3/8, 6 1/2, 6 5/8, 6 3/4
Medium - 33 3/4 inches for sizes 6 7/8, 7, 7 1/8, 7 1/4
Large - 35 1/2 inches for sizes 7 3/8, 7 1/2, 7 5/8, 7 3/4

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-NA FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

FEDERAL

UU-B-36 - Bags, Paper (Grocers)
PPP-B-636 - Box, Shipping, Fiberboard

STANDARDS

FEDERAL

FED-STD-151 - Metal; Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS
U.S. Postal Service Manual

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Non-government publications. The following documents form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules
(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification
(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20026.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6. 2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.4 and 6.4).

3.3 Material.

3.3.1 Grommet. The grommet wire shall be high grade spring steel, 5/16 inch wide, 0.020 ± 0.002 inch thick; with a white pyroxylin coating not less than 0.003 inch thick. The grommet wire shall be cut as follows: 32-1/4 inches long for sizes 6-3/8, 6-1/2, 6-5/8, 6-3/4; 33-3/4 inches long for sizes 6-7/8, 7, 7-1/8, 7-1/4, and 35-1/2 inches long for sizes 7-3/8, 7-1/2, 7-5/8 and 7-3/4. See Figure 1 for assembled view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

3.3.2 Clamp. The adjustment clamp clinched to one end of the steel grommet wire shall be made of the following materials:

Base and clamp - Carbon steel AISI 1020, hardness Rockwell B scale 66, thickness 0.031 ± 0.002 inch.
Slug - Carbon steel AISI 1015/1020, hardness Rockwell B scale 90, thickness 0.015 ± 0.002 inch.

Assembled clamp- Electroplated with zinc 0.00005 inch minimum thickness, chrome plated finish.

The clamp assembly shall be approximately 1 inch long and its design shall conform to Figure 2. The width of the base component shall be sufficient to accommodate the width of the grommet wire. Testing shall be performed as specified in Table II, Section 4.

3.3.3 Support stay and holder. The support stay and support holder (see figure 3) shall be stamped from straight chromium stainless steel, commercially designated as type 430 stainless steel with material composition as shown below when tested as specified in section 4, Table II. The size of the support shall be stamped on the lower end of the stay piece in 1/4 inch high letters as S, M, L for the 3 sizes. A secure paper label containing the size may be used as an alternate to stamping.

Composition:		
	Carbon	- 0.12% max. (L.A.)
	Manganese	- 1.00% max. (L.A.)
	Silicon	- 1.00% max. (L.A.)
	Chromium	- 14.00% min. 18.00% max (L.A.)
	Phosphorus	- 0.040% max. (L.A.)
	Sulphur	- 0.030% max. (L.A.)
	(Reminder iron and constituents)	

3.3.4 Rivets. The rivets for securing the grommet to the support stay shall be nickel brass, with 3/32 inch minimum diameter head, when tested as specified in section 4, Table II. The length of the rivets shall be sufficient to provide a roll over edge of 0.045 inch to 0.050 inch. As an alternate, steel rivets of adequate size and length may be used to attach the grommet wire providing the head of the rivet does not exceed 0.040 inch and the rolled over edge presents a smooth clinch with no more than 3 splits in the coil.

3.5 Design. The stay support, support holder and clamp, shall conform in all respects to the design, dimensions and details shown on the attached Figures 1, 2 and 3 and as specified herein.

3.6 Construction. The grommet wire (see 3.3.1) shall be securely riveted to the inside top end of the support stay with two rivets

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

(see 3.3.4) placed 5/8 inch apart through the center of the wire. The grommet wire shall be positioned on the stay so that the ends of the wire are opposite the stay - or at the rear. The adjustment clamp (see 3.3.2 and figure 2) shall be securely clinched to the inside of one end of the wire. The support holder, fabricated from the material specified in 3.3.3, shall be in accordance with figure 3 and provided only when required by 6.2.

3.7 Workmanship. The finished crown support and crown support holder shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified all inspections shall be in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.2.1.1 and 4.5.2.1.2. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer (see 6.2).

4.5 Quality conformance.

4.5.1 Component testing. Testing shall be performed on the components listed in Table II for the characteristics shown. The sample size for the designated lot size shall be as shown in Table I. There shall be no evidence of failure of any unit to meet the requirements as specified.

Table I. Sampling for Testing

Lot Size	Sample size
800 or less	2
801 to 22,000	3
22,001 and over	5

All test reports shall show the individual values utilized in expressing the final result.

4.5.2 Examination of the end item.

4.5.2.1 Visual examination of crown support with clamp and support holder. The defects found during examination shall be classified in accordance with 4.5.2.1.1 and 4.5.2.1.2. The lots shall be inspected in accordance with 4.5.2.1.3. The unit of product for these examinations shall be one crown support and holder of each size.

4.5.2.1.1 Examination of crown support with clamp and support holder for defects in design, material, construction, workmanship and marking. Defects numbered 1 through 9 in the asterisk (*) column shall be classified as Major when seriously affecting serviceability or appearance, Minor when affecting serviceability or appearance, but not seriously. The inspection level shall be I of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification *	Major	Minor
Grommet wire	Not fabricated of pyroxylin coated spring steel.		101	
	When wire depressed together into figure 8 position, and released, it does not spring back to its original circular shape.		102	
	Coating is not smooth and adherent, e.g., contains beads, blisters, lumps, specks, pits or foreign matter.	1		
	Coating is missing, scratched, scuffed, abraded or otherwise damaged, in area of:			
	- 1/16 inch or more in width or 1 inch or more in length.		103	
	- More than 1/32 inch, but less than 1/16 inch in width or more than 1/2 inch, but less than 1 inch in length.			301
	- 1/32 inch or less in width or 1/2 inch or less in length.			302
	Not clean.			303
	Length 1/2 inch more or less than required for size specified.		104	
	Clamp hinge not on inside of grommet wire.		105	
	Clamp not securely clinched to wire.			304
	Clamp does not function properly.			305
	Rough or sharp edges on wire or clamp.			306

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification *	Major	Minor
Support stay and holder:				
Finish	Dirty, i.e., surface contains grease mill soil, or other foreign matter.		106	
Design	Any operation not in accordance with specified requirements.	2		
Material	Not corrosion-resisting steel.		107	
Construction and workmanship.	Component missing, cracked, fractured, bent out of shape, distorted, malformed, deformed, or otherwise impaired.	3		
Assembly	Not connected or joined as specified or poorly accomplished, e.g., crown support attached to wrong side of the stay.			307
	Sharp edge, burr or sliver that may injure personnel or damage fabric.		108	
	Rivet missing, wrong type or size, or is not peened, i.e., can be removed by hand.		109	
	Rivet head broken off.		110	
	Clinch of rivet incomplete, insufficient or set improperly, i.e., loose/can be rotated by hand or tool.		111	
	Flexing of crown wire causes rivet to loosen or wire to separate.		112	
	Rivet insufficiently peened but it cannot be removed by hand.			308

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification *	Major	Minor
	Setting of rivet is poorly accomplished, resulting in sharp rough edges.	4		
	Rivets are not placed equidistant from edges of the stay (+ 1/32 inch).	5		
	Rivets are not 5/8 inch (+ 1/32 inch) apart, center to center.	6		
	Stay and support holder will not mate, or a loose fit is effected	7		
	Stay not fabricated within finished dimensional requirements and tolerances.	8		
Marking	Missing, illegible, misplaced or type or size not as specified.	9		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

4.5.2.1.2 Examination of crown support with clamp and support holder for defects in dimensions. Any dimension that is not within the specified tolerances shall be classified as a defect. The inspection level shall be S-3 of MIL-STD-105.

4.5.2.1.2.1 Examination of support holder for slot opening dimensions. The 1/4-inch strips shall have a 2-inch radius and the slot opening between the strips and support holder body shall have a uniform dimension of 0.0475 ± 0.002 inch for the entire length of the slot. The width of the slot opening shall be determined as per note under Figure 3.

4.5.3 Examination of packaging. Shipping containers fully prepared for delivery shall be examined for the defects listed below to determine conformance to packaging, packing and marking requirements. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 of MIL-STD-105.

Examine	Defects
Markings (interior & exterior)	Missing, incorrect, illegible; of improper size, location, sequence or method of application.
Materials	Any nonconforming component; Component missing, damaged, or otherwise defective, affecting serviceability.
Workmanship	Inadequate application of components such as container flaps, etc.
	Bulging or distortion of containers.
Weight or content (interior & exterior)	Number per container more or less than the required or indicated quantity. Shipping containers containing more than one size crown support not so marked with the sizes and quantities of each indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

Table II. Test Methods

Components	Characteristics	Rqmt. para	Test Method	No. Determination per sample unit	Results Appl to Ind Unit	Results Appl to Lot Avg	Results reported as
Grommet wire pyroxylin coating (10 pounds)	Material identification of pyroxylin	3.3.1	Std Comml	1	X		Pass or fail
	Thickness of wire	3.3.1	Std Comml	2	X		Avg of 2 det per sample unit to nearest 0.001 inch.
	Thickness of pyroxylin	3.3.1	Std Comml	3	X		Avg of 3 det per sample unit to nearest 0.001 inch.
Spring steel	*Material Identification	3.3.1	Std Comml	-	-		Pass or fail
	*Temper	3.3.1	Std Comml	-	-		Pass or fail
Clamp	*Material Identification	3.3.2	Std Comml	-	-		Pass or fail
Support stay and holder (50 pounds)	Type 430 Stainless steel	3.3.3	Method III, FED-STD-151	2 Composite		X	To nearest 0.01% of each element.
Rivets	Material Identification and plating	3.3.4	Std Comml	1	X		Pass or fail

* Certificate of compliance will suffice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall be Level A or commercial as specified (see 6.2).

5.1.1 Level A. Fifty support holders (when required (see 6.2)) and fifty crown supports shall be bulk packaged separately, in kraft paper bags conforming to type I, grade A of UU-B-36 and the closure secured with metal staples.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice, provided it meets the requirements specified for commercial packing.

5.2 Packing. Packing shall be level B or commercial as specified (see 6.2).

5.2.1 Level B. Fifty crown supports of one size only without support holders shall be packed in a snug-fitting fiberboard shipping container conforming to RSC, type CF, variety SW, grade 200 of PPP-B-636.

5.2.2 Commercial. Crown supports and support holders, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rule and U. S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contractor or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The crown support with clamp and support holder are used with the Marine Corps frame cap.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

6.2.1 Acquisition requirements: Acquisition documents must specify the following:

(a) Title, number and date of this specification
(b) Size required (see 1.2)
(c) Whether support holders are required (see 1.2)
(d) Whether first article is required (see 3.2)
(e) Number of support holders and crown supports in first article (see 3.2).
(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

6.3 Standard sample. The standard sample may be obtained from the procuring activity or as directed by the contracting officer.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 10.0 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Figures. Figures 1, 2 and 3 shows the design of the crown support and support holder finished assembly and clamp detail and are furnished for information only. In the event of conflict between the figures and text of this specification, the text of this specification shall govern.

6.7 Key word listing
Frame Cap

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing Activity:
Navy - MC
Project No. 8405-N161

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.



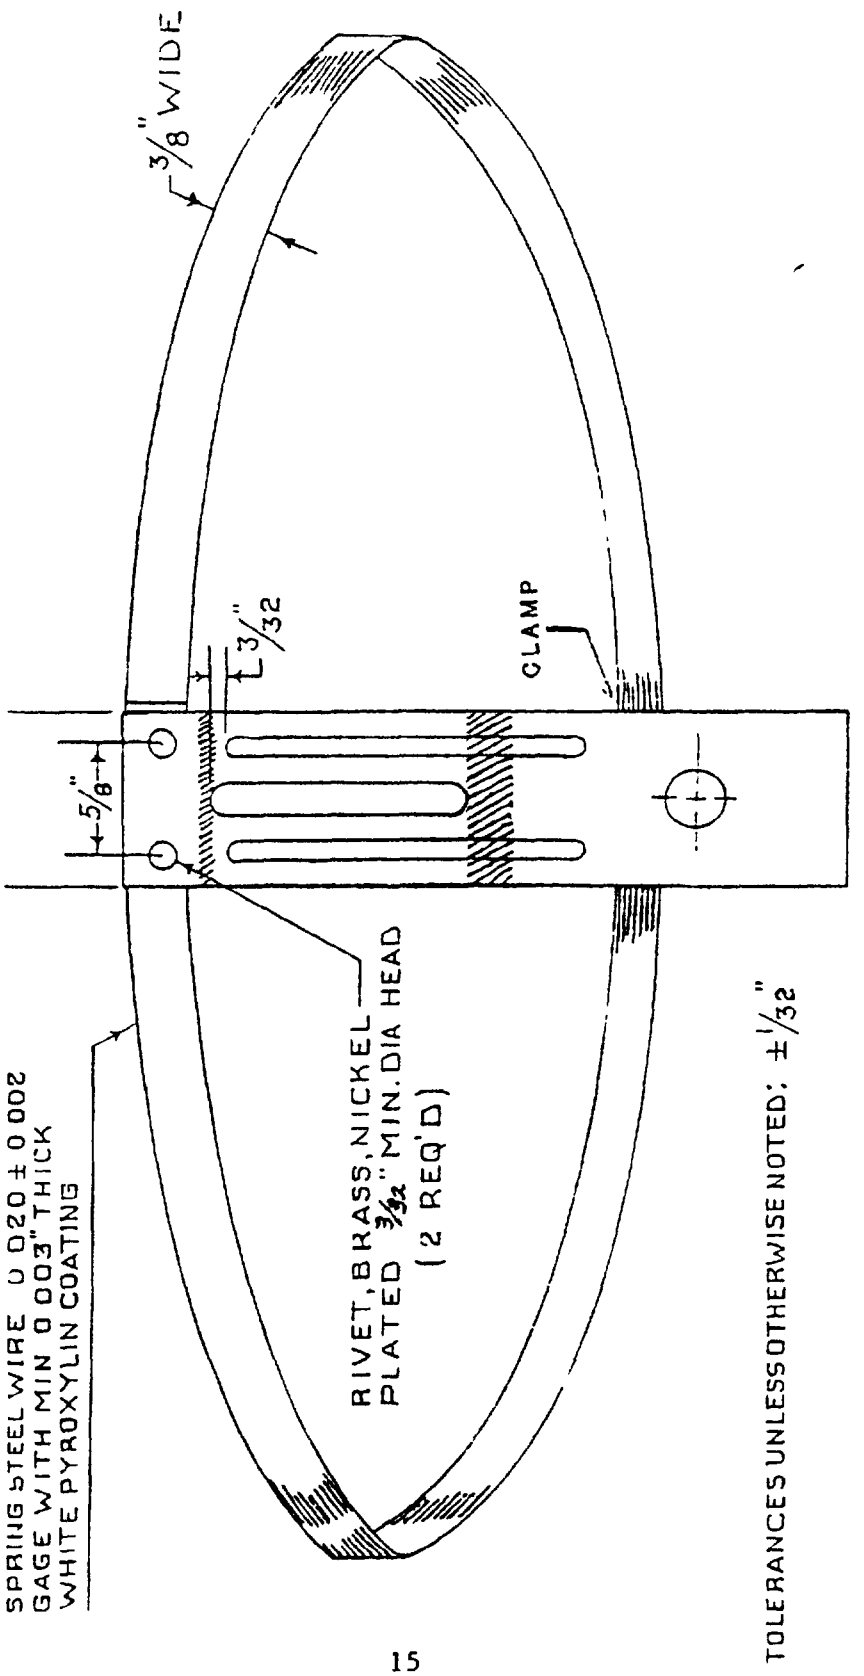


FIGURE 1. SUPPORT, CROWN, SERVICE CAP: AND SUPPORT HOLDER

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

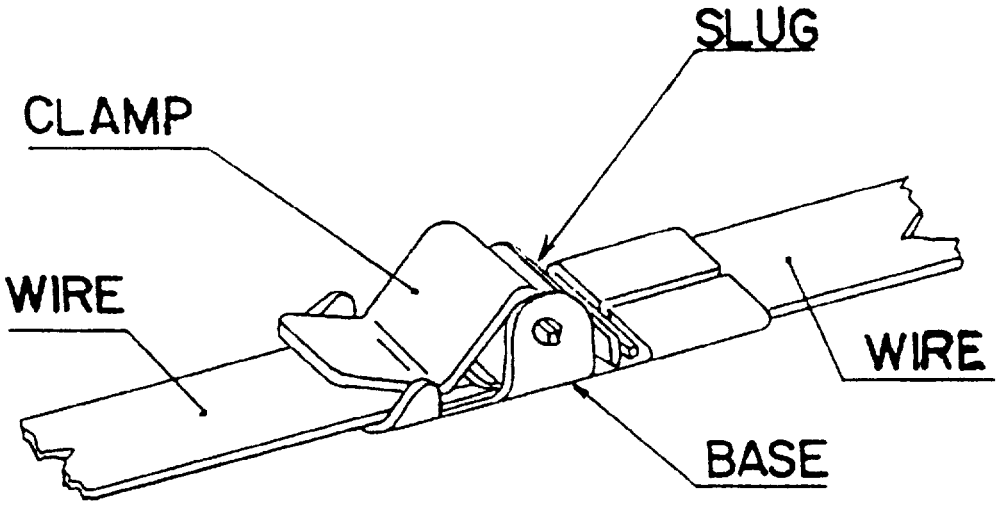


ASSEMBLY

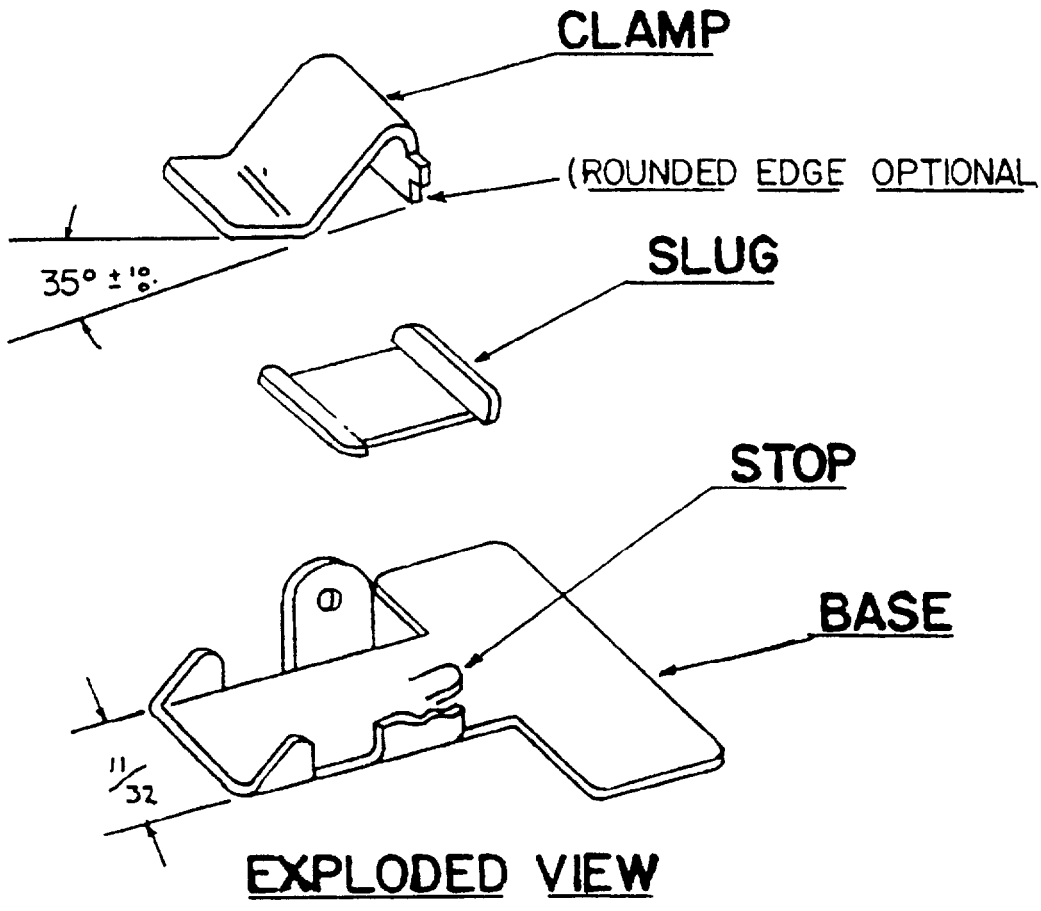


EXPLODED VIEW

FIGURE 2 CLAMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

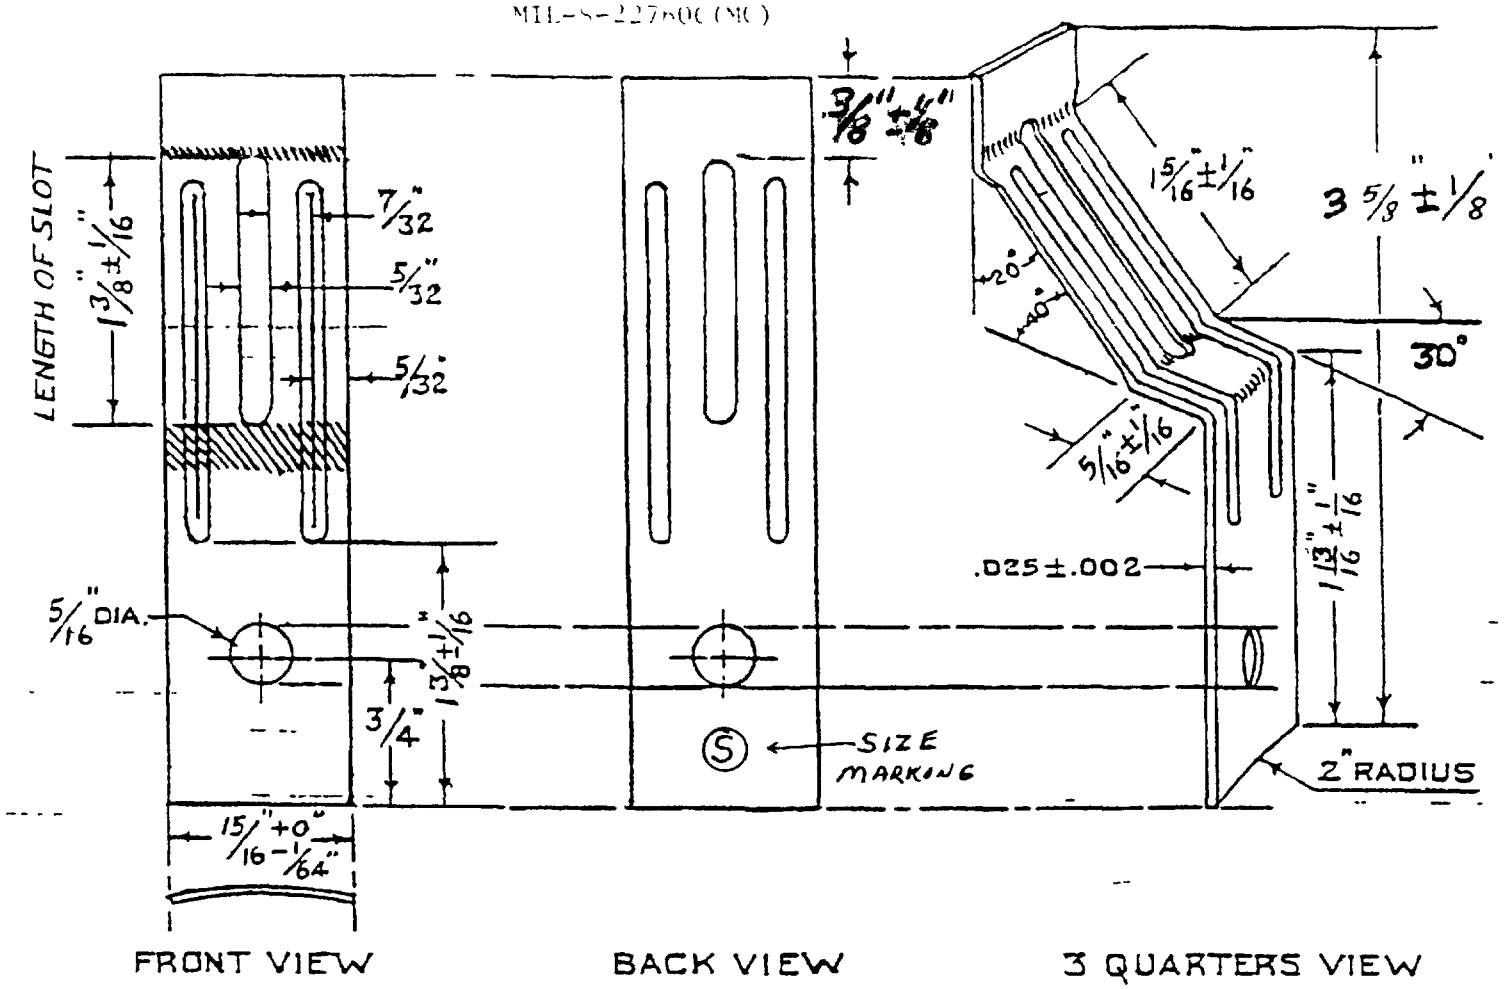

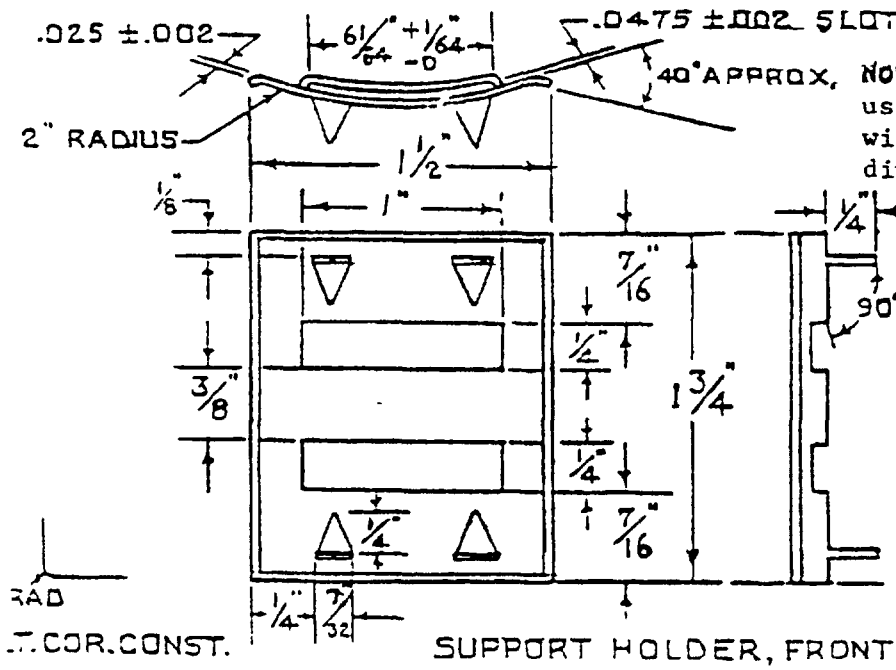

NOTE: Each slot opening shall be measured using 0.045 inch and 0.0495 inch round wires as "GO NO GO" gauge of the required dimensions for determining the acceptable minimum and maximum dimensions respectively.

TOLERANCES, UNLESS OTHERWISE NOTED:
FRACTIONS, ± 1/32"
ANGLES, ± 5°

FIGURE 3 Support, Crown, Service Cap; and Support Holder

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER	2 DOCUMENT DATE (YYMMDD)
	MIL-S-22760C(MC)	28 MARCH 1991

3. DOCUMENT TITLE

SUPPORT, CROWN, SERVICE CAP; AND SUPPORT HOLDER

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	e. TYPED NAME OF SIGNATURE

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:54Z
Check the source to verify that this is the current version before use.