MILITARY SPECIFICATION SHEET

FUSEHOLDER, BLOCK TYPE
STYLE FH75

The complete requirements for procuring the fuseholder described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

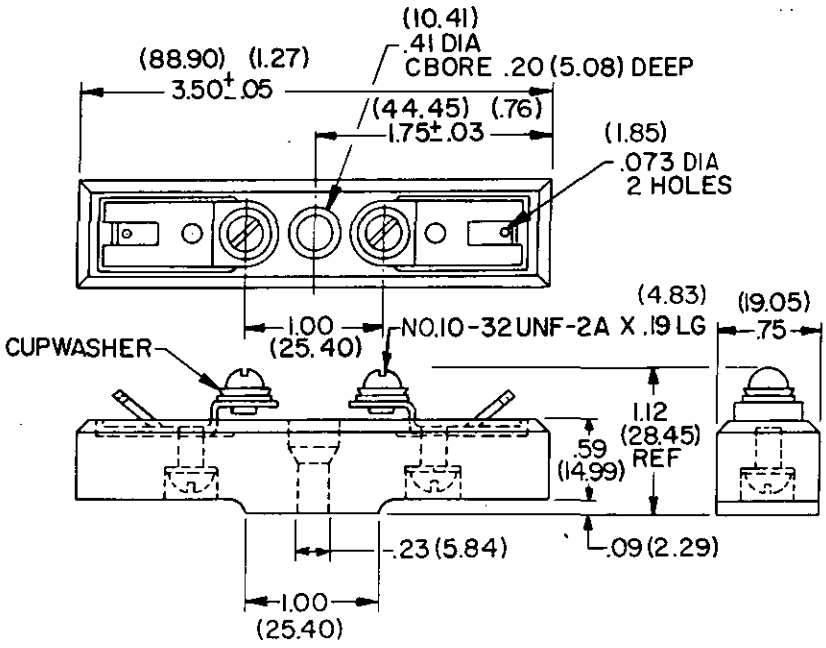

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
4. The base shall be white ceramic; terminal plates shall be brass.
5. This fuseholder is for use with fuse style F50 of MIL-F-15160.
6. Ratings:
   Current - - - - - - - - 5 amperes
   Voltage - - - - - - - - 90 volts
7. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
8. Endurance test is not required.

FIGURE 1. Style FH75AM fuseholder (screw clamp).

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - EL, MI, ME, MU
Navy - SH, EC
Air Force - 85, 17
DSA - ES

User activities:
Army - WC, AT, AV
Navy - MC, AS, CG
Air Force - 19

Preparing activity:
Navy - SH

(Project 5920-0183)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.