This document has been approved for public release and sale; its distribution is unlimited.


MIL-F-21346/12
16 March 1971
SUPERSEDES
Dwg. 9000-S6202-74497

MILITARY SPECIFICATION SHEET

FUSEHOLDER (SHROUD TYPE) STYLE FH78, 0-30 AMP., 1000 VOLT

THIS SPECIFICATION IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DAPARTMENT OF DEFENSE.

THE COMPLETE REQUIREMENTS FOR PROCURING THE FUSEHOLDER DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-F-21346.

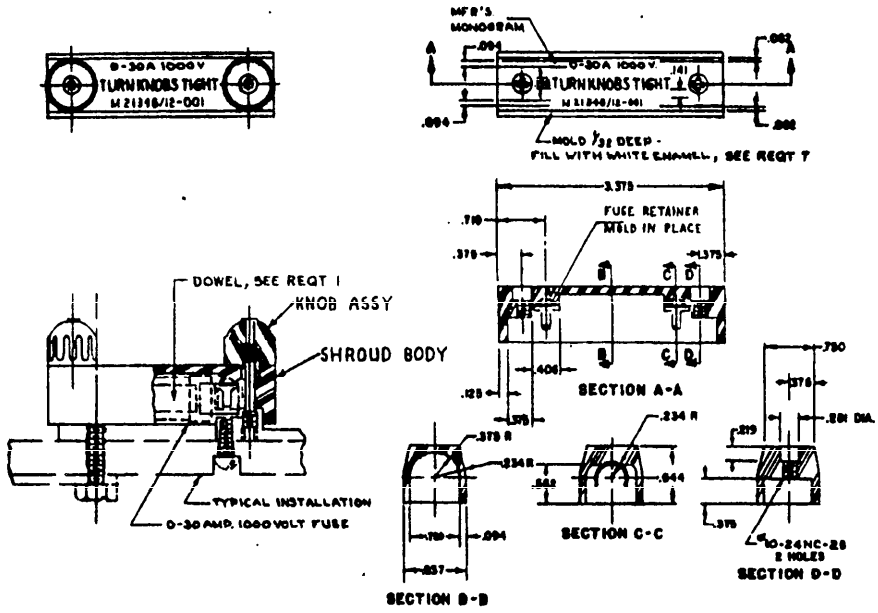

FUSE CARRIER ASSEMBLY

SHROUD BODY


INCHES	MM
0.016	0.40
.031	.80
.047	1.19
.062	1.59
0094	2.38
.125	3.16
.141	3.57
.156	3.97
.187	4.76
.219	5.55
.234	5.95
.250	6.35
.281	7.14
.375	9.53
.406	10.32
.430	11.11
.469	11.90
.563	14.29
.656	16.67
.719	18.26
.750	19.06
.844	21.43
.875	22.23
.938	23.81
1.250	31.77
1.625	41.27
3.375	85.77

NOTES:

1. Dimensions shall be in inches.
2. Unless otherwise specified, tolerances shall be ± 0.005 for decimals.
3. Tolerances for angles shall be ± 1/2°.
4. Metric equivalents (to the nearest .01mm) are given for general information only and are based upon 1 inch = 25.4 mm.


FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

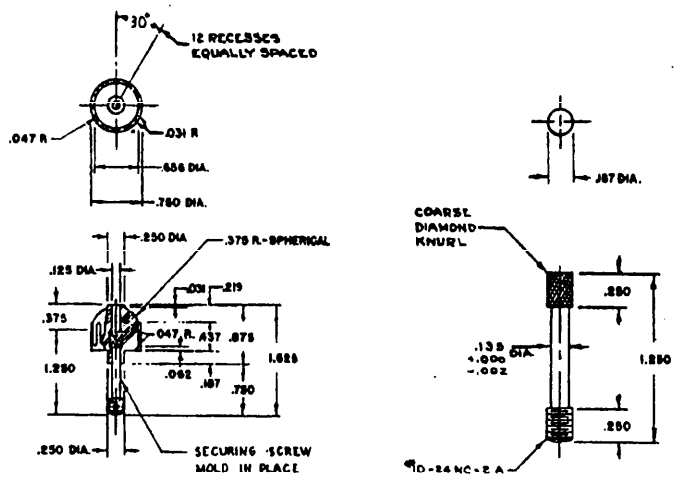

KNOB ASSEMBLY

SECURING SCREW

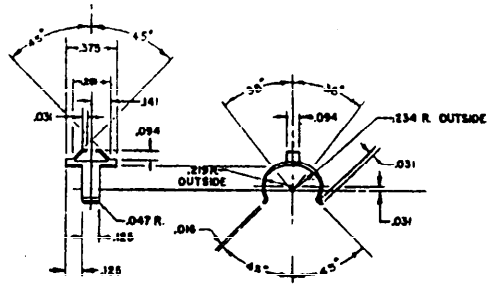

REQUIREMENTS:

FUSE RETAINER

1. Material:
   Shroud body: Molded plastic type MFI-8 in accordance with MIL-M-14.
   Knob: Molded plastic type MFI-20 in accordance with MIL-M-14.
   Securing screw: Corrosion-resistant steel in accordance with QQ-S-763.
   Fuse retainer: Phosphor-bronze.
   Dowel: The dowel shall be wood 0.44-inch diameter, 2.32-inch long and shall be assembled in the fuse carrier.
2. This fuseholder is for use with fuse style F70 of MIL-F-15160/70. Fuses will not be furnished.
3. Insulation resistance: Insulation resistance shall be not less than 200 megohms when subjected to test condition C of Test Method 302 of MIL-STD-202. This test shall be conducted immediately following the moisture resistance test.
4. Vibration: Vibration test shall be conducted in accordance with Test Method 201 of MIL-STD-202 with the fuse installed.
5. The electrical rating shall be 30 amperes at 1000 volts.
6. Part number: Consists of the basic number of this specification sheet and a dash number: MIL-F-21346/12-001.
7. Markings may be in accordance with the applicable superseded drawing, however, when the molds require reworking or replacing, the identification marking shall be changed to conform to this specification.

Custodians:
Army - EL
Navy - SH
Air Force - 80

Review activities:
Army - MI
Navy - EC, SH
Air Force - 80
DSA - ES

User activities:
Army - ME, AT
Navy - MC

Preparing activity:
Navy - SH
(Project 5920-0292-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.